


Model 4280 and 4280N WE=310 (PJ-051) To Bantam Miniature Phone Plug

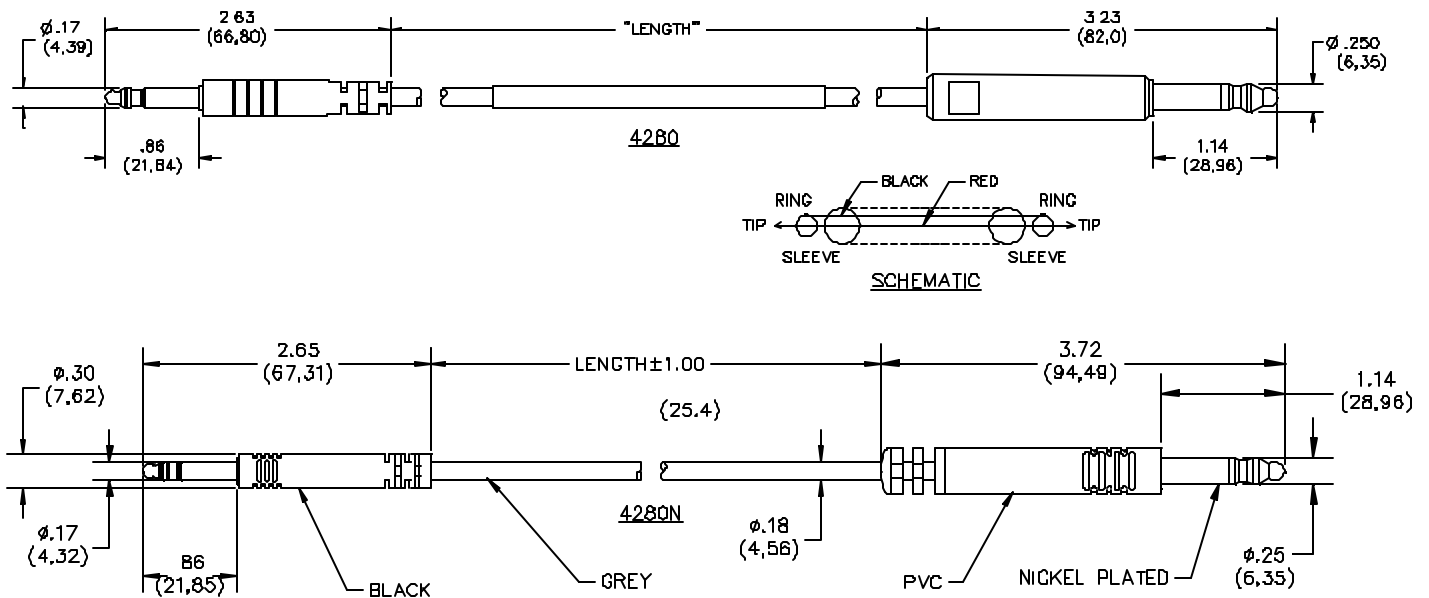

FEATURES:

- Shielded cable to reduce noise
- WE-310 and Bantam Plugs molded to the cable for optimum durability
- Available in three lengths

MATERIALS:

Plugs – (4280) Brass, unplated

(4280N) Brass, nickel plated

Cable – 2 Conductor shielded twisted pair, PVC jacket and insulation

RATINGS:

Operating Voltage: 300 VRMS Max.

Operating Temperature: +50°C to (+122°F) Max.

Current: 3.36 Amperes @ 25°C

Nominal Capacitance Shield Conductors: 720pf

Nominal Capacitance Between Conductors: 420pf

ORDERING INFORMATION: Model 4280 or 4280N-XX

XX = Length in inches

Standard Lengths 36" (914 mm), 48" (1219 mm), 60" (1520 mm)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pomona manufacturer](#):

Other Similar products are found below :

[5699-RED](#) [5741](#) [5744](#) [5952](#) [6273-C-36-0](#) [6283-C-60](#) [72961](#) [72977](#) [MG-B-36-BLK](#) [8007](#) [8021](#) [8029](#) [8030](#) [8037](#) [8055](#) [8059](#) [8060](#) [8061](#)
[8062](#) [8063](#) [8068](#) [8069](#) [1166-4-BLK](#) [HB-18-ORG](#) [HB-18-VIO](#) [HB-24-BRN](#) [HB-24-GRY](#) [HB-24-VIO](#) [HB-36-0](#) [HB-36-BRN](#) [HB-36-VIO](#)
[1236-8-BLK](#) [1370-24-2](#) [1370-60-RED](#) [AL-B-8-RED](#) [1546410](#) [B-18-3](#) [1614-0](#) [1614-RED](#) [EM5054-240](#) [1632814](#) [1693-18-BLK](#) [1743-12-RED](#) [1743-24-0](#) [1743-48-2](#) [1743-60-BLK](#) [1808-C-12](#) [1898083](#) [1908984](#) [1910576](#)