


Model 4280 and 4280N WE=310 (PJ-051) To Bantam Miniature Phone Plug

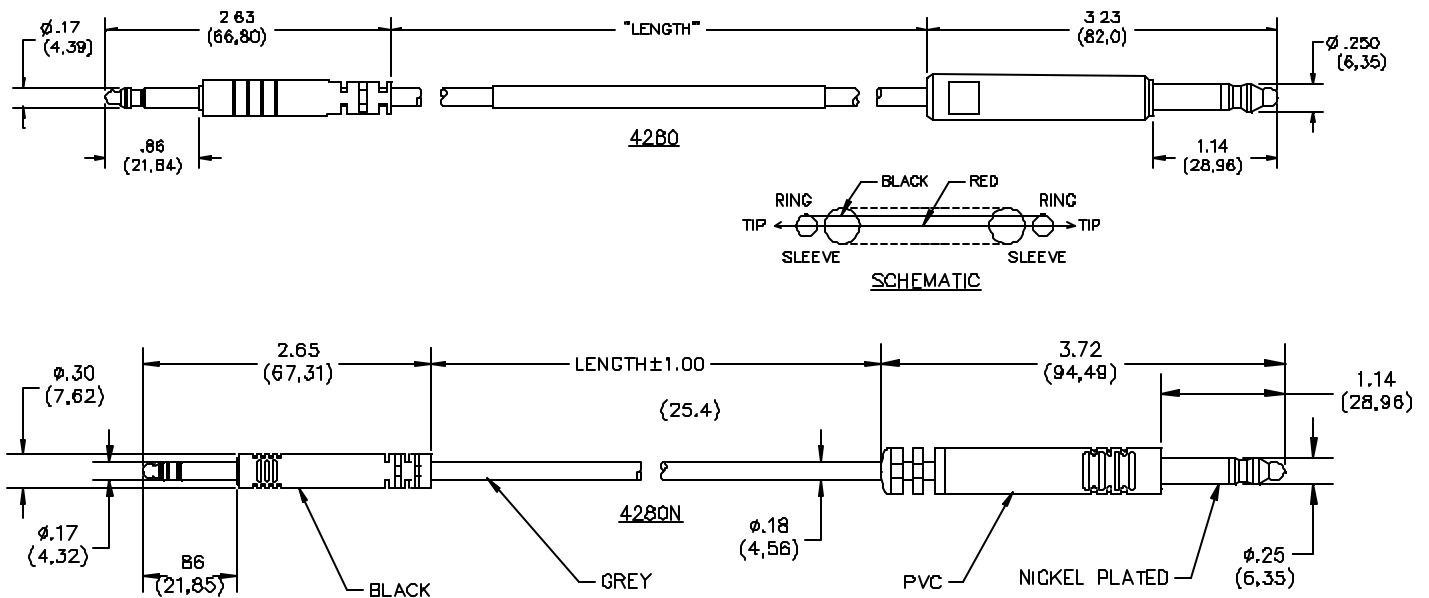

FEATURES:

- Shielded cable to reduce noise
- WE-310 and Bantam Plugs molded to the cable for optimum durability
- Available in three lengths

MATERIALS:

Plugs – (4280) Brass, unplated

(4280N) Brass, nickel plated

Cable – 2 Conductor shielded twisted pair, PVC jacket and insulation

RATINGS:

Operating Voltage: 300 VRMS Max.

Operating Temperature: +50°C to (+122°F) Max.

Current: 3.36 Amperes @ 25°C

Nominal Capacitance Shield Conductors: 720pf

Nominal Capacitance Between Conductors: 420pf

ORDERING INFORMATION: Model 4280 or 4280N-XX

XX = Length in inches

Standard Lengths 36" (914 mm), 48" (1219 mm), 60" (1520 mm)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Leads](#) category:

Click to view products by [Pomona](#) manufacturer:

Other Similar products are found below :

[R928010000](#) [R928142000](#) [1301430020](#) [15101](#) [15107](#) [15115](#) [15117](#) [15303](#) [15304](#) [15102](#) [15120](#) [15308](#) [15408](#) [15302](#) [15306](#) [15307](#) [15502](#)
[15403](#) [15407](#) [15409](#) [15506](#) [EM3782-12-7#](#) [EM4702-12-0](#) [BU-1149-A-36-0](#) [BU-1481-E-12-0](#) [BU-1481-E-24-0](#) [2524-A-60](#) [924961-C](#)
[LB1F-2R-RED](#) [LB1F-2R-YLW](#) [2500](#) [2501](#) [2524-A-48](#) [2977-J-48](#) [R928051000](#) [R928141000](#) [R928143000](#) [R948131000](#) [BU-1449-E-12-2](#)
[BU-1480-E-24-0](#) [BU-1481-E-12-2](#) [BU-1481-E-24-2](#) [LB1F-2R-BLK](#) [LB1F-2R-BLUE](#) [EM3542-1#](#) [EM3782-12-8#](#) [6345](#) [6432](#) [72929-20-2](#)
[R928140000](#)