


Model 4290 Adapter, SMA Male to BNC Female

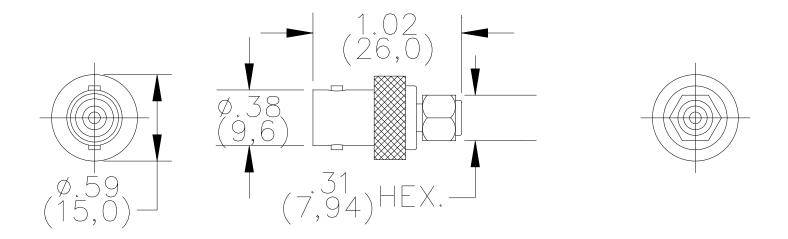

Materials

Body: Beryllium Copper Contacts: Male – Brass

Female - Beryllium Copper

Finish: SMA Body - Gold Plated per MIL-G-45204, Type II, Class 2

BNC Body - Nickel Plated per QQ-N-290

Contacts - Gold Plated per MIL-G-45204, Type II, Class 2

Dielectric: PTFE per L-P-403

Specifications

Voltage: For CE Compliance and for personal safety, do not hold in hand when voltages exceed 33 Vrms/70 Vdc.

Maximum voltage for hands free use: 335 Vrms Max.

Operating Temperature: -65°C (-85°F) to +165°C (+329°F)

Nominal Impedance: 50 Ohms Frequency Range: 0 – 12.4 GHz.

Ordering Information

Model: 4290

USA: Sales: 800-490-2361

Technical Support: technicalsupport@pomonatest.com


Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

THE



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Adapters - Between Series category:

Click to view products by Pomona manufacturer:

Other Similar products are found below:

5945-9503-000 MCX/F-SMA/M R192417010 ADBJ20-E1-BJ379 ADM2 ADPL75-A1-PL75 242191 9317505 AD130 ADBJ20-E1-PL74 ADBJ20-E2-BJ79 ADBJ77-E1-UPL20 ADRMF370 242190 242215 242228 R125680000W R192430000 UAD95 1057367-1 8311505 R114704000 R451034500 R451030500 R451543000 HDVDPN ADBJ20-K1-PL20 R451570000 R192419000 R451034000 J9 J3WE-5 R451032500 242201RP 17K132-K00S5 03K719-S22S3 AD-RSMAF-RTNC 53K156-K00N5 53K160-KIMN1 29S132-K01N5 53S156-K00N5 02S119-S00E3 28K132-K00N5 02S109-K00S3 27-8200TP 242235 ADBJ20-E1-BJ89 ADP-SMAF-MMCXM 000-2900 321-102-003 (SMA-50/2-H155/W1.03 AU)