
Pomona®

Model 4487 & 5260 BNC (Male) On Retractable Cable With Molded Strain Relief

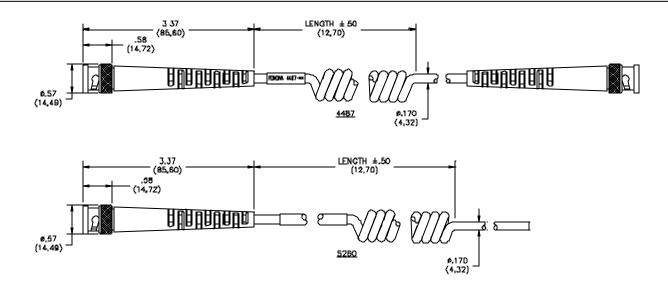

FEATURES:

- BNC center contact is gold plated for optimum electrical connection.
- Flexible Strain Relief is molded to the BNC/Coaxial Cable to ensure long cable life.
- BNC shell is plated for tarnish resistance.

MATERIALS:

BNC (Male): Body: Brass, Nickel Plated

Center Contact: Brass, Gold Plated

Impedance: 50 Ohms

Strain Relief: PVC Molded to Cable, Color: Black

Marking: "POMONA 4487-XX" or "POMONA 5260-XX"

Cable: Shielded microphone, center conductor, 24 AWG (45x40), polyurethane jacket, .170" (4,32 mm).

Pomona part number marked on the cable.

RATINGS:

Operating Temperature: 50°C (+122°F) Max.

Operating Voltage: Shield/Earth: 30VAC/60VDC Max. Inner Conductor/Shield: 270VRMS Max.

ORDERING INFORMATION: Model 4487-XX (BNC Male, Both Ends) or 5260-XX (BNC Male, One End

Only) XX = Extended Length In Inches, Standard. Lengths: 48" (122 cm), 60" (152,4 cm), 72" (183 cm)

Ordering Example: 4487-48 is BNC (Male), Both Ends, Extended Cable Length of 48" (122 cm)

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA

Sales: 800-490-2361 Fax: 888-403-3360

SY/EH/LS Technical Assistance: 800-241-2060

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Cable Assemblies category:

Click to view products by Pomona manufacturer:

Other Similar products are found below:

573/2 73-6311-6 73-6353-3 73-6364-6 MDB1-9SH001 MDM-15PH003L-K139 MDM-21PH003L-K139 MH113-01SB1-MH1RP-0152
MIKQ6-7SH076 R288940005 RF174-01RP1-03RP1-0110 RMTB1-6PHY0102 145111-05-12.00 1661-C-24 2192 CA-628485-A43

24P104C24J1-012 24P104C24P1-006 24P104C24P1-018 24P203C24P2-006 24P204C24J1-003 172-2150-EX 1800920920914PJ FCB-3030-ALT 21117-046 21117-050 PCX-24-50 24P103C24P2-003 25P203C25P2-003 R284008001 R285426000 R288940003 R288940008

RF174-03RP1-01BR1-0200 RF179-74BJ3-77RP1-0305 RMTB1-15PHY0102 RMTB1-8PHY0102 4814-BB-24 500-181-R-ACC MIKQ6-7SH023 5260-72 314-120 JR4N1-CL1-6F JR4R3-CL1-4F JT2N1-CL1-1F JT2T1-CL1-6F 4814-K-48 RN-UFL-SMA6 100E151JW3600X CCNTN2-MM-LL335-26