

Model 3276 & 4513 Miniature Banana Plug with Threaded Stud



Model	"X" Dimension
3276	.23" (5,8mm)
4513	.48" (12,2mm)

Minimum Panel Thickness is 0.030" (0.76mm)

Features

- Threaded stud enables fast and easy mounting to panels.
- Solder turret allows wire attachment.
- Miniature banana plug features gold plated Beryllium Copper for long insertion life and low contact resistance.

Materials

Miniature Banana Plug:

Spring: Beryllium Copper, Gold Plated

Body: Brass, Gold Plated

Hex Nut: 4-40 Nut, Stainless Steel


Ratings


Operating Voltage: 2500 VDC Current: 5 Amperes Max.

Ordering Information

Model 3276 Model 4513

Parts are packaged ten per bag, unassembled.



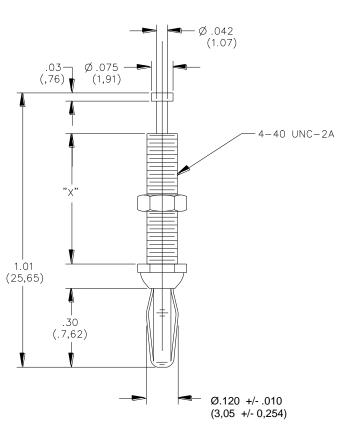

USA: Sales: 800-490-2361

Technical Support: technicalsupport@pomonatest.com

Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 International: 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Test Plugs & Test Jacks category:

Click to view products by Pomona manufacturer:

Other Similar products are found below:

01-2601-4-0210 01-2601-4-0212 01-2604-4-0212 01-2604-5-0210 01-2150-1-0312 01-2350-1-02 01-2352-1-02 01-2368-1-02 01-2604-4-0210 01-2604-5-0212 01-2606-5-0212 M39024/10-01G M39024/10-17G M39024/11-09G M39024/11-42 M39024/11-43 M39024/12-08 707-5311 707-5402-01-19 707-5410 923739-40-I R644543000 R948161000 R999351000 1408-4 1499-101 1533-1 1659559 1659567 1663921 1663939 1696-102 174-R825B-EX NYS508-BU NYS508-O 211-101 RS100GBL RS250GBL 251-102 25-2251-2-03 25-2259-2-03 923743-16-I 923743-24-I 923743-28-I 2854-BLU 2970-BLK 30-443G 1680