


Model 4768 Cable Assembly, Double Banana Plug To Micrograbber® Breakouts

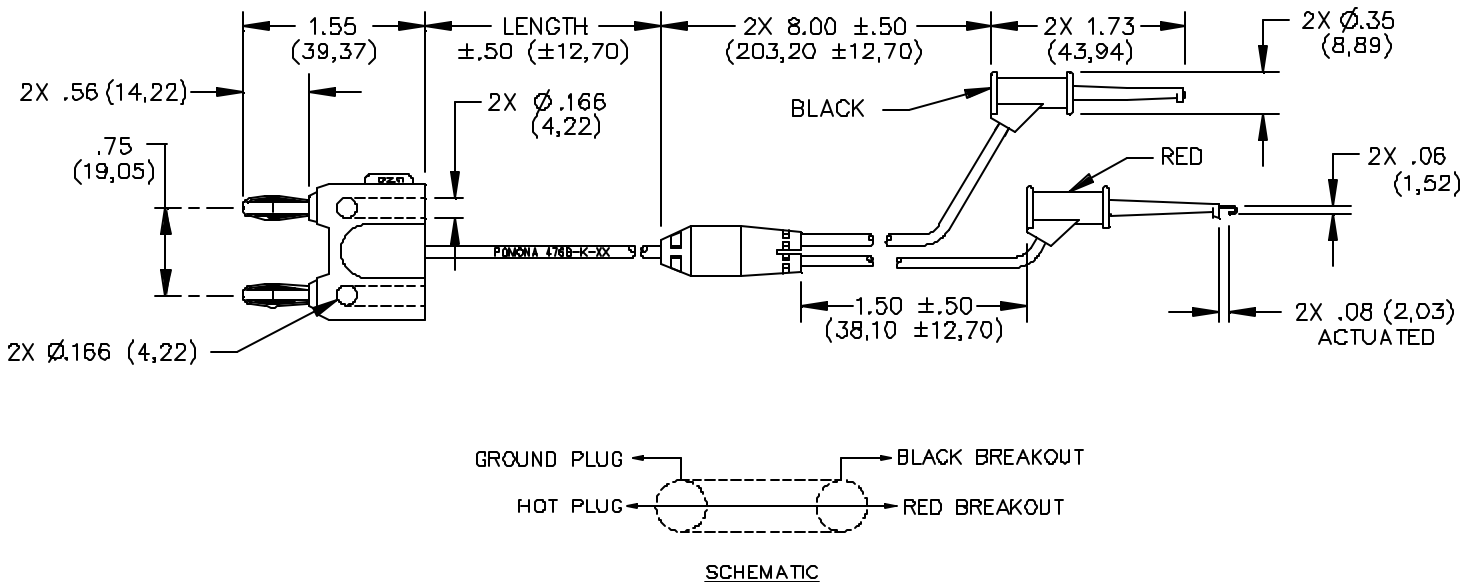

MATERIALS:

Connector: Double Banana Plug

Body: Brass

Spring: Beryllium Copper

Insulation: Polypropylene

Cable: RG 174/U, 2.54 (.100) O.D.

Marking: "Pomona 4768-K-XX"

Molded Breakout: PVC molded to breakout leads and cable.

Wire: 20 AWG

Connector: Micrograbber® Breakouts

Contact – Gold Plated Beryllium Copper

Spring – Stainless steel

Insulation – Glass filled nylon

RATING:

Operating Temperature: +50°C (+122°F) Max.

Operating Voltage: 1000 WVDC

ORDERING INFORMATION: Model 4768-K-XX XX = Cable length

Std. Lengths: 4" (102), 8" (203), 12" (305), 18" (457), 24" (610), 36" (914), 48" (1219), 60" (1524).

Additional lengths can be quoted upon request.

Ordering Example: 4768-K-24 is a cable with a length of 24".

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Leads](#) category:

Click to view products by [Pomona](#) manufacturer:

Other Similar products are found below :

[795-2384-10-25](#) [1301430020](#) [15107](#) [1510-24-105](#) [15308](#) [15408](#) [15302](#) [15307](#) [15407](#) [15409](#) [BU-1149-A-36-0](#) [BU-1481-E-12-0](#) [BU-1481-E-24-0](#) [1927617](#) [2450](#) [2524-A-60](#) [LB1F-2R-RED](#) [LB1F-2R-YLW](#) [2500](#) [2524-A-48](#) [2977-J-48](#) [R948131000](#) [380200](#) [BU-1449-E-12-2](#) [BU-1480-E-24-0](#) [BU-1481-E-12-2](#) [BU-1481-E-24-2](#) [LB1F-2R-BLK](#) [LB1F-2R-BLUE](#) [LB1F-2R-WHT](#) [6345](#) [6432](#) [EM3782-24-3#](#) [R948161002](#) [R948160002](#) [R948170002](#) [R948171002](#) [R948163002](#) [973604100](#) [934160101](#) [934160100](#) [R948174000](#) [CT3269](#) [CT3258](#) [CT3158-100](#) [HSPL 8568/AWG16/200/RT](#) [HSPL 8568/AWG16/200/SW](#) [28.0119-10020](#) [28.0127-05025](#) [28.0127-20025](#)