

Model 5066

Do-It-Yourself Male BNC Connector with Strain Relief Boot For RG 58 and 141 Coax cable



FEATURES:

- ✓ Fits coax cable types RG 58 and RG 141 with cable OD of: .185" to .200" (4.7mm to 5.08mm)
- ✓ Do-It-Yourself and field serviceable.
- ✓ Strain relief boot.
- ✓ Ten boot colors available.

MATERIALS:

Connector:

Body and Fittings – Brass per QQ-B-626, Alloy 360, ½ Hard. Center Contact – Brass per QQ-B-626, Alloy 360, ½ Hard.

Dielectric – Teflon per ASTM D1457.

Vee Gasket - Silicone rubber per QQ-R-765, Class 11A, Grade 50.

Clamp Nut – Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish:

Body and Fittings – Nickel plated, tarnish resistant

Center Contact – Gold plated per requirements of MIL-C-39012

Clamp Nut – Nickel plated per QQ-N-290, Class 2.

RATINGS:

Impedance: 50 Ohms Frequency: DC to 3 GHz. VSWR: 1.35 @ 3 GHz.

Insertion loss: .2 dB @ 3 GHz. Cable Retention Force: 40 lbs.

Mating Cycles: 500

Temperature: +50°C. (+122°F.) Max.

Voltage: Hands free testing in controlled voltage environments: 500 Peak Max. For CE compliance: not

intended for hand-held use at voltage above 33 Vrms/70 Vdc.

ORDERING INFORMATION:

Model 5066-boot color* Example: to order a 5066 with a red boot, the order number is 5066-2

*Boot Colors:

0 (Black), 1 (Brown), 2 (Red), 3 (Orange), 4 (Yellow), 5 (Green), 6 (Blue), 7 (Violet), 8 (Gray), 9 (White)

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060 For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com


Rev: 102 D1094272



Model 5066

Do-It-Yourself Male BNC Connector with Strain Relief Boot For RG 58 and 141 Coax cable

Assembly Instructions

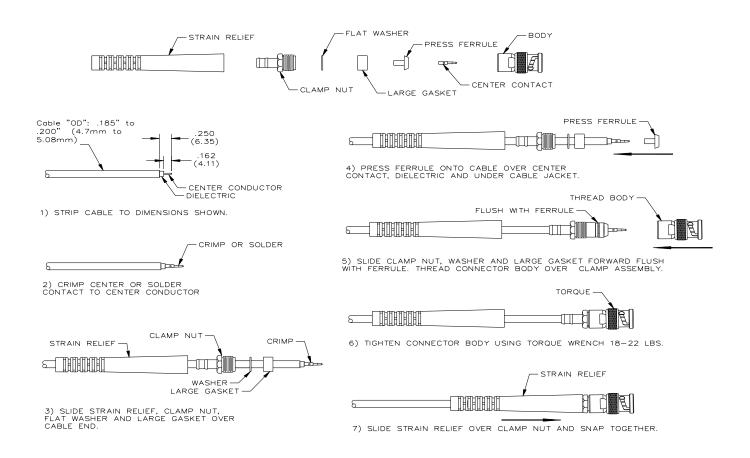

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Connectors / Coaxial Connectors category:

Click to view products by Pomona manufacturer:

Other Similar products are found below:

R125315120 8915-1511-000 89674-0827 5916-1103-603 0106-001-000 6-0001-3 6001-7071-019 6002-7051-003 6002-7551-202 6059674
1 619550-1 630059-000 M39012/25-0021 M39012/79-3008 M39030/3-01N M39030/3-03N M3933/25-29N M3933/25-36N 6500-7071-046

6501-1071-002 M83723/72W24576 M83723/72W2457N 6769 CX050L2AQ 7002-1541-010 7003-1572-002 7004-1512-000 7009-1511
004 7010-1511-000 7029-1511-060 7101-1541-010 7101-1571-002 7105-1521-002 7145-1521-002 7209-1511-011 7210-1511-012 7210
1511-015 7210-1511-019 7210-1511-040 7225-1512-050 7242-1511-000 73137-5015 73251-0111 73251-0672 73276-1501 73366-0013

73404-2300 73413-6080 734151610 73415-5721