


Model 5266 Cable Assembly BNC Male One End Only

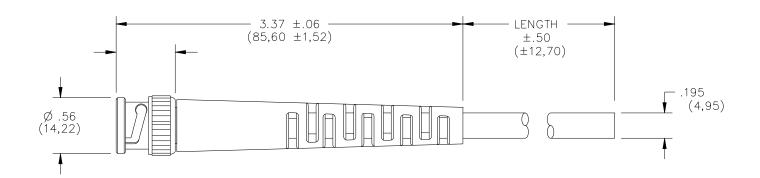

CABLE TYPE	
	RG 58C/U
	(Black)
Model No.	5266-C-XX
Cap. PF/Ft.	30.8
Nom. Imp.	50

FEATURES:

• Is the same high quality construction as Model 2249-C with a connector on one end only.

MATERIALS:

Connectors: BNC Male

Body: Brass, Tarnish resistant plating

Dielectric: PTFE

Center Contact – Gold Plated Brass

Strain Relief: PVC molded directly to cable and connectors

Marking: "Pomona 5266-C-XX"

RATINGS:

Voltage: Shield/Earth: 30VAC/60VDC Max.

Inner Conductor/Shield: 500VRMS Max. Operating Temperature: +50°C (+122°F) Max.

ORDERING INFORMATION: Model 5266-C-XX

XX = Cable Lengths, Standard Length: 60" (1524),

Additional lengths can be quoted upon request.

Ordering Example: 5266-C-60 Indicates 60" in length.

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

Sales: 909-469-2900 Fax: 909-629-3317
Technical Assistance: 800-241-2060

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Cable Assemblies category:

Click to view products by Pomona manufacturer:

Other Similar products are found below:

73-6352-10 73-6353-3 73-6364-6 R285001001 R288940004 R288940005 145111-05-12.00 1661-C-24 1801171170914KE 24P104C24J1-012 24P104C24P1-006 24P104C24P1-018 24P204C24J1-003 172-2150-EX 1800920920914PJ FCB-3030-ALT 21117-046 21117-050 PCX-24-50 24P103C24P2-003 25P203C25P2-003 PTWY-24-78 R284008001 R285001021 R285426000 R288940003 R288940008 RF179-74BJ3-77RP1-0305 4814-BB-24 5260-72 JT2N1-CL1-1F DLP-COAX1 4814-K-48 115101-09-06.00 CCNTN2-MM-LL335-26 73-6351-25 73-6352-3 73-6353-25 1800920920610PJ GD0BQ0BQ024.0 1-3636-600-5210 TL8A-11SMA-11SMA-01500-51 R284C0351060 R288940009 R288040009 R288040002 9702-1SL-1 PT82NSMA 73-6353-10 R285020301W