


Model 5295 Low Voltage Retractable Sheath Banana Plug To Spade Lug

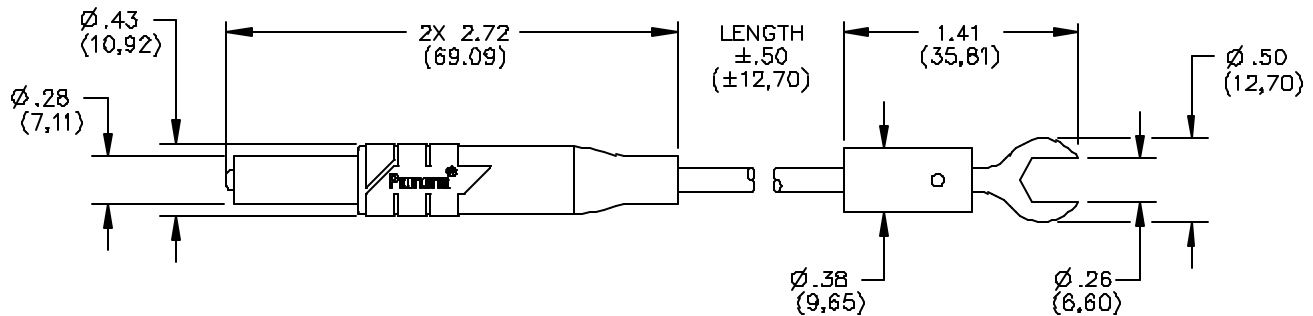

FEATURES:

- Model 5295 is part of a family of test accessories ideal for low voltage precision measurements.
- Designed to greatly minimize the effect of Thermal Electric Voltage (Thermal EMF). Thermal EMF is generated at the junction of dissimilar metals at different temperatures and is a common source of error in low micro and nano volt measurements.
- Banana plug materials feature gold plated Tellurium Copper body and gold plated Beryllium Copper spring for low thermal EMF.
- Spade lug is of high conductivity Electrolytic Tough Pitch (ETP), 110 Copper Alloy.
- Banana plug is designed with retractable sheaths for versatile use in safety sheathed or non-sheathed jacks.
- Banana plugs are attached to low resistance multi-stranded 12 gauge wire.

MATERIALS:

Retractable Sheath Banana Plug:

- Plug Body - Tellurium Copper, gold plated
- Plug Spring - Beryllium Copper, gold plated
- Tip - Nylon 6, color matches wire.
- Compression Spring - Stainless steel
- Insulation - Nylon 6, Color matches wire.

Wire: 12 AWG; Stranding 7 x 38/36 Bare Copper, PVC Insulated, .144" (3,66 mm) O.D.

Marking: "Model 5295-XX-*"

Spade Lug: Electrolytic Tough Pitch (ETP), 110 Copper Alloy, ½ Hard, Gold Plated

Insulation: Polypropylene molded to spade lug body and wire, color matches wire.

RATINGS:

Operating Temperature: +55° C (+131°F) Max.

Operating Voltage: 1000 VRMS/DC

Current: 7 Amperes. Continuous

ORDERING INFORMATION: 5295-XX-*, XX = Length in inches. * = Color, Std. Colors: -0 Black, -2 Red
Standard lengths in inches: 36" (91,44 cm). Additional lengths can be quoted upon request.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Leads](#) category:

Click to view products by [Pomona](#) manufacturer:

Other Similar products are found below :

[795-2384-10-25](#) [1301430020](#) [15107](#) [1510-24-105](#) [15308](#) [15408](#) [15302](#) [15307](#) [15407](#) [15409](#) [BU-1149-A-36-0](#) [BU-1481-E-12-0](#) [BU-1481-E-24-0](#) [1927617](#) [2450](#) [2524-A-60](#) [LB1F-2R-RED](#) [LB1F-2R-YLW](#) [2500](#) [2524-A-48](#) [2977-J-48](#) [R948131000](#) [380200](#) [BU-1449-E-12-2](#) [BU-1480-E-24-0](#) [BU-1481-E-12-2](#) [BU-1481-E-24-2](#) [LB1F-2R-BLK](#) [LB1F-2R-BLUE](#) [LB1F-2R-WHT](#) [6345](#) [6432](#) [EM3782-24-3#](#) [R948161002](#) [R948160002](#) [R948170002](#) [R948171002](#) [R948163002](#) [973604100](#) [934160101](#) [934160100](#) [R948174000](#) [CT3269](#) [CT3258](#) [CT3158-100](#) [HSPL 8568/AWG16/200/RT](#) [HSPL 8568/AWG16/200/SW](#) [28.0119-10020](#) [28.0127-05025](#) [28.0127-20025](#)