


FEATURES:

- ✓ Test tip adapter has been designed to IEC 1010, which is the latest international safety standard.
- ✓ Snaps onto Pomona's DMM Probes with .080" (2 mm) O.D. Tips, such as model 5519A.
- ✓ Adapter allows access to hard to reach test points.
- ✓ Tip is insulated to the point to prevent shorting of adjacent components.

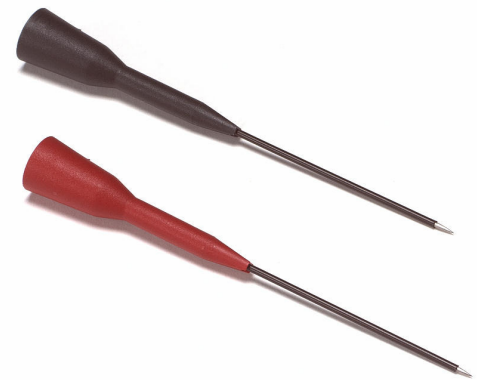

MATERIALS:

Tip: Stainless Steel

Tip Insulation: Kynar

Body: Polypropylene, Fire Retardant, UL94 V-2 Rated, Color: One Red, One Black

RATING:

IEC 1010-2-031, Category II, P2 Compliant

Operating Voltage: 300 Vrms/DC

Current: 3 Amperes.

ORDERING INFORMATION:

Model 6262-02 (set of one black and red probe)

Model 6262-2 (red probe only)

Ordering example: 6262-2 (red probe)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 425-446-5844 Technical Support: technicalsupport@pomonatest.com

For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Probes](#) category:

Click to view products by [Pomona](#) manufacturer:

Other Similar products are found below :

[6214](#) [6474](#) [815003](#) [923832-BK-B](#) [P-KIT-1](#) [KT-MS001](#) [925250-R](#) [923848-C](#) [973368101](#) [972318101](#) [972318100](#) [MXHQ87WJ3000](#) [PK2-5MM-102](#) [382254](#) [TAS90](#) [VL1735/45](#) [973368100](#) [972327100](#) [972327101](#) [973995100](#) [973995101](#) [CT3982B-120](#) [CT4386](#) [PP023-1](#) [PK1-5MM-125](#) [PK1-5MM-127](#) [PP026-1](#) [P6139B-PK10](#) [PQ215](#) [PQ219](#) [PQ218](#) [GE.3421](#) [GE.3121](#) [GE.1511](#) [GE.1521](#) [GE.2511](#) [HVP15B](#) [TT-SI7002](#) [4005](#) [4011](#) [4013](#) [4014](#) [4015](#) [4016](#) [4018](#) [P TK-100](#) [P TK-250/100](#) [UTH05](#) [402-IEC-RT](#) [402-IEC-SW](#)