


Model 6353 2mm Tip Reach, SMD Micro Grabber Test Clip **←**

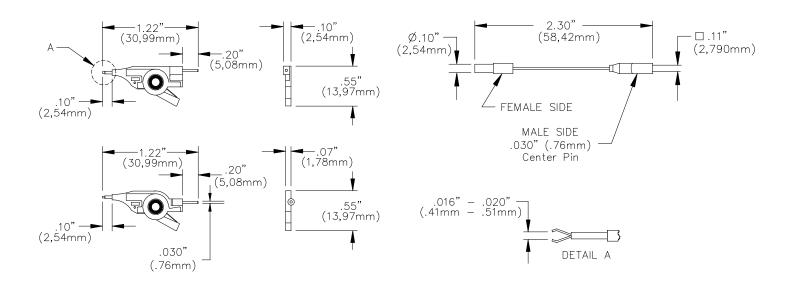

FEATURES:

- ✓ Use with PQFP packages with 0.3mm lead pitch or greater.
- ✓ 2mm long tip allows measurement at IC leads that are not easily accessible.
- ✓ Thin body style allows an unlimited number of clips to be stacked side by side.
- ✓ Maximum frequency is 100 MHz.

MATERIALS:

Leads: Stainless-Steel Wire

Tip Tubing: Teflon™ Coated Nickel Plated Copper

Body: ABS

Flying Lead Connection: Gold Plated Copper


RATINGS:

Operating Voltage: Hands free usage in controlled voltage environments: 70 Vrms maximum. For CE compliance: not

intended for hand-held use at voltages above 33 Vrms/70 Vdc.



Model 6353 (Kit contains ten test clips and ten flying leads)



All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 425-446-5844 Technical Support: technicalsupport@pomonatest.com For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

12/21/07 D1094649 Rev: 101



Model 6353 2mm Tip Reach, SMD Micro Grabber Test Clip

^Domona[®]


The items included with this product are certified to meet IEC 1010-2-031 safety requirements.

Les éleménts inclus avec ce produit sont certifies pour répondre à des exigences de surete du IEC 1010-2-031. Los items incluidos con este producto se certifican para resolver requisitos de seguridad del IEC 1010-2-031.

 Only IEC 1010 type shrouded test plugs should be used with IEC 1010 type jacks. NEVER INSERT A PROBE TIP WITH BANANA SPRING INTO A TEST ACCESSORY JACK THAT WILL BE USED AS A HAND HELD PROBING DEVICE -Seuls les vérificateurs de tension renforcés de type IEC 1010 devraient être utilisés avec des jacks de type IEC 1010. NE JAMAIS INSERER DE BOUT DE SONDE AVEC RESSORT BANANE DANS UN JACK D'ESSAI D'ACCESSOIRES QUI SERA UTILISE COMME DISPOSITIF DE SONDAGE A MAIN.

-Se deben usar sólo tapones de prueba reforzados del tipo IEC 1010 con receptáculos de tipo IEC 1010. NUNCA INTRODUZCA UNA CLAVIJA CON UN MUELLE TIPO BANANA EN UN RECEPTACULO DE PRUEBA QUE A SU VEZ SE USE COMO APARATO DE PRUEBA MANUAL.





Overvoltage Category I, II, III or IV. CAT Surtension Categorie I, II, III ou IV. Sobretension de Categoria I, II III o IV.



Caution! Refer to Accompanying Documents. Attention! Se Reporter aux Documentsjoints.; Peligro! Consulte los Documentos Adjuntos.



Caution ! Risk of Electric Shock. Attention ! Risque de Choc Électrique. ¡Peligro! Riesgo de Sacudida Electrica.

Pomona Electronics (E

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Test Clips category:

Click to view products by Pomona manufacturer:

Other Similar products are found below:

010000 923743-16 BU-656-0 4140A 4324A TL820 TL822 5116 5450 5216 5252 5454 5694 923700 923698 CR0060 3038 927739-20 923743-14 932146101 930318100 930126101 Z-SB3FA3250AAAB04001 Z-S11F0107G1000 Z-S11F0207B1520 Z-S11F0207B2030 Z-S11F0207B15000 Z-SB3FA3226AAAB11001 Z-S11F0207B1010 923706 930317800 973889100 972405100 972405101 R999720600 949-1 458-3 SK 201200278 020 BU-65-B BU-21CPN-GZZZ PK-HVA-02 BU-25C-DZZZ BU-142-2 00425 R8-1A RED R8-54 BLACK R8-54 RED MA1SW MA260SH SW AX-CR-02-SET