


**Model 6551**  
**Microline Passive Oscilloscope Probe w/RO**



**Model 6551**  
**Microline Passive Oscilloscope Probe with Readout Actuator**

**Accessories included with Probe:**

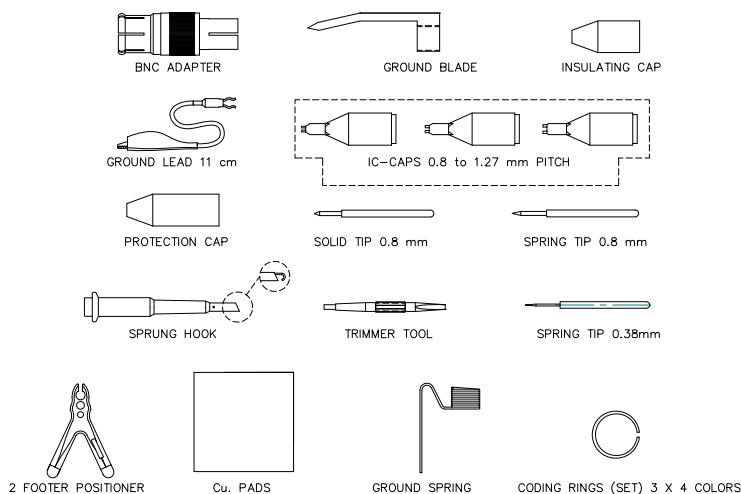

**Features**

- This probe is recommended for high performance probing applications and is adjustable for low and high frequencies.
- The probe's entire core is made of a high quality ceramic hybrid.
- Pure coaxial design and laser trimmed resistors ensure highest signal fidelity along the signal path offering high bandwidth and fast risetimes for accurate impulse measurements.
- Probe tips are interchangeable and can be replaced easily.
- Accessories (one of each) included with Probe are:
  - BNC Adapter
  - Ground Blade
  - Ground Spring
  - Ground Lead with Alligator Clip 11 cm (4.33")
  - IC Caps: 0.8mm, 1.0mm, and 1.27mm pitch
  - Insulating Cap
  - Protection Cap
  - Solid Tip 0.8mm (0.0315")
  - Spring Tips 0.8mm (0.0315") & 0.38mm (0.015")
  - Sprung Hook
  - Trimmer Tool
  - 2 Footer Positioner
  - Coding Rings (Set) 3 X 4 colors
  - Copper (Cu) Pads

- Our passive probes are spring loaded, with needle sharp tips to support precise and safe measurements.

**Specifications**

<b>Attenuation Ratio</b>	10:1
<b>Maximum Input Voltage CAT II<sup>1</sup></b>	300 Vrms
<b>Scope Bandwidth MHz</b>	500
<b>System Bandwidth MHz (-3 dB)</b>	500
<b>System Rise time (ns)</b>	< 0.7
<b>Probe Input Resistance (MΩ)</b>	10
<b>Probe Input Capacitance (pF)</b>	< 11
<b>Compensation Range (pF)</b>	10 - 20
<b>Readout Actuator<sup>2</sup></b>	Yes
<b>Cable Length</b>	4 ft. (1.2 m)

<sup>1</sup> Rating: Per IEC 61010-031. Maximum voltage allowed on the low or ground connection including shell and housing must not exceed 30 V.  
<sup>2</sup> Any oscilloscope that uses the Tektronix® style range actuator.

**Ordering Information**

Model: 6551  
500 MHz 0-Scope Probe w/RA

**USA:** Sales: 800-490-2361  
 Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
 Fax: 425-446-5844  
**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500  
**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Test Probes](#) category:*

*Click to view products by [Pomona](#) manufacturer:*

Other Similar products are found below :

[6214](#) [6474](#) [815003](#) [923832-BK-B](#) [P-KIT-1](#) [KT-MS001](#) [925250-R](#) [923848-C](#) [973368101](#) [972318101](#) [972318100](#) [MXHQ87WJ3000](#) [PK2-5MM-102](#) [382254](#) [TAS90](#) [VL1735/45](#) [973368100](#) [972327100](#) [972327101](#) [973995100](#) [973995101](#) [CT3982B-120](#) [CT4386](#) [PP023-1](#) [PK1-5MM-125](#) [PK1-5MM-127](#) [PP026-1](#) [P6139B-PK10](#) [PQ215](#) [PQ219](#) [PQ218](#) [GE.3421](#) [GE.3121](#) [GE.1511](#) [GE.1521](#) [GE.2511](#) [HVP15B](#) [TT-SI7002](#) [4005](#) [4011](#) [4013](#) [4014](#) [4015](#) [4016](#) [4018](#) [P TK-100](#) [P TK-250/100](#) [UTH05](#) [402-IEC-RT](#) [402-IEC-SW](#)