
# Pomona®

## Model 6728 Adapter, Standard Sheath Banana Jack to Non-Sheath Banana Plug



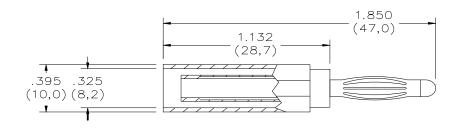

#### **Features:**

- ✓ Adapter provides an easy and quick conversion from a standard sheathed banana plug / patch cord to a standard exposed banana plug.
- ✓ Allows standard sheathed banana plugs / patch cords to connect to non-sheath style banana jacks or blinding post.
- $\checkmark$  Ideal for environments using a mixture of sheathed and non-sheathed style patch cords.

#### **Materials:**

Banana Jack:	Nickel Plated Brass
Banana Plug:	Nickel Plated Beryllium Copper
Insulation:	Nylon 6

Black Red

#### **Ratings:**

ames	
Voltage:	600 Vrms; For CE compliance: not intended for hand held use at voltage above
	33 Vrms / 70 Vdc.
Current:	20 A max
Temperature:	-10 to +55 C

#### **Ordering Information:**

6728-0	
6738-2	

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Test Plugs & Test Jacks category:

Click to view products by Pomona manufacturer:

Other Similar products are found below :

01-2601-4-0210 01-2601-4-0212 01-2604-4-0212 01-2604-5-0210 01-2150-1-0312 01-2350-1-02 01-2352-1-02 01-2368-1-02 01-2604-4-0210 01-2604-5-0212 01-2606-4-0210 01-2606-4-0212 01-2606-5-0212 M39024/10-01G M39024/10-17G M39024/11-09G M39024/11-42 M39024/11-43 M39024/12-08 707-5311 707-5402-01-19 707-5410 923739-40-I R644543000 R948161000 R999351000 1408-4 1499-101 1533-1 1659559 1659567 1663921 1663939 1696-102 174-R825B-EX NYS508-BU NYS508-O 211-101 RS100GBL RS250GBL 251-102 25-2251-2-03 25-2259-2-03 923743-16-I 923743-24-I 923743-28-I 2854-BLU 2970-BLK 30-443G 1680