

Models 72923

SMD Test Probe W/ Sharp, Spring Mounted Tip, 2MM



Features

- **SMD test probe with sharp, spring mounted tip and 2mm jack**
- Provides ultra-fine control for probing high density SMD circuits
- Very fine 0.03in (0.7mm) diameter stainless steel tip is spring-mounted for controlled pressure
- Removable, clear IC insulator cap prevents shorting of adjacent IC loges.
- Sheathed 2mm receptacle adapts to 2mm test leads and adapters.

Materials

- Probe Body: Brass
- Probe Tip: Steel
- Insulation: Polypropylene
- Cap Insulation: Polypropylene

Ordering Information


Model:72923-Color
Available colors: Black (-0), or Red (-2)

USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

e-mail: technicalsupport@pomonatest.com

Where to Buy: www.pomonaelectronics.com

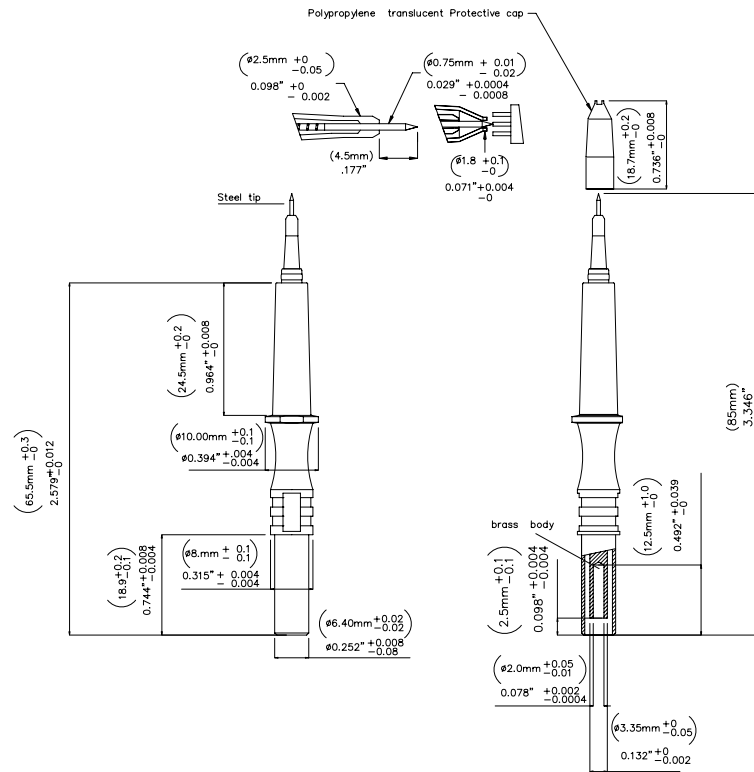

Specifications

Max Current	Max. 1A
Max Voltage	600 V Cat III
Temperature	-20° C + 80° C
Max Resistance	Less than 5 mΩ

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Probes](#) category:

Click to view products by [Pomona](#) manufacturer:

Other Similar products are found below :

[6214](#) [6474](#) [815003](#) [923832-BK-B](#) [P-KIT-1](#) [KT-MS001](#) [925250-R](#) [923848-C](#) [973368101](#) [972318101](#) [972318100](#) [MXHQ87WJ3000](#) [PK2-5MM-102](#) [382254](#) [TAS90](#) [VL1735/45](#) [973368100](#) [972327100](#) [972327101](#) [973995100](#) [973995101](#) [CT3982B-120](#) [CT4386](#) [PP023-1](#) [PK1-5MM-125](#) [PK1-5MM-127](#) [PP026-1](#) [P6139B-PK10](#) [PQ215](#) [PQ219](#) [PQ218](#) [GE.3421](#) [GE.3121](#) [GE.1511](#) [GE.1521](#) [GE.2511](#) [HVP15B](#) [TT-SI7002](#) [4005](#) [4011](#) [4013](#) [4014](#) [4015](#) [4016](#) [4018](#) [P TK-100](#) [P TK-250/100](#) [UTH05](#) [402-IEC-RT](#) [402-IEC-SW](#)