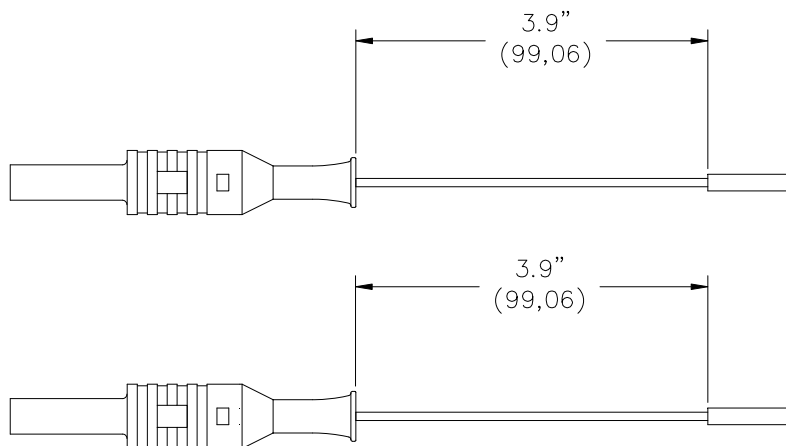


Model 72936**2mm Sheathed Banana Plug to 4mm Sheathed Banana Plug****Features**

- Provides a quick and easy configuration between a 4mm sheathed banana jack to a 2mm sheathed banana jack.

Materials

2mm/4mm Banana Plugs:

Body: Nickel Plated Brass

Spring: Nickel Plated Beryllium Copper

Plug Insulation: Polypropylene, color per part number

Wire Insulation: PVC, color per part number

Ratings

Operating Voltage: For *CE Compliance* and for personal safety, do not hold in hand when voltages exceed 33 Vac/70 Vdc.

Do not use on circuits where transient stresses can exceed the rated voltage.

Operating Temperature: -20°C to +80°C (-4°F to +176°F) Max.

Operating Current: 2 Amperes Max.

Ordering Information

Model: 72936-XX-*

XX = Standard Length: 39 (3.9in) (10cm)

* = Standard Color: -0 Black, -2 Red

Ordering Example: 72936-39-2, Test Lead is 3.9in and Red.

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Leads](#) category:

Click to view products by [Pomona](#) manufacturer:

Other Similar products are found below :

[795-2384-10-25](#) [1301430020](#) [15107](#) [1510-24-105](#) [15308](#) [15408](#) [15302](#) [15307](#) [15407](#) [15409](#) [BU-1149-A-36-0](#) [BU-1481-E-12-0](#) [BU-1481-E-24-0](#) [1927617](#) [2450](#) [2524-A-60](#) [LB1F-2R-RED](#) [LB1F-2R-YLW](#) [2500](#) [2524-A-48](#) [2977-J-48](#) [R948131000](#) [380200](#) [BU-1449-E-12-2](#) [BU-1480-E-24-0](#) [BU-1481-E-12-2](#) [BU-1481-E-24-2](#) [LB1F-2R-BLK](#) [LB1F-2R-BLUE](#) [LB1F-2R-WHT](#) [6345](#) [6432](#) [EM3782-24-3#](#) [R948161002](#) [R948160002](#) [R948170002](#) [R948171002](#) [R948163002](#) [973604100](#) [934160101](#) [934160100](#) [R948174000](#) [CT3269](#) [CT3258](#) [CT3158-100](#) [HSPL 8568/AWG16/200/RT](#) [HSPL 8568/AWG16/200/SW](#) [28.0119-10020](#) [28.0127-05025](#) [28.0127-20025](#)