


Model 73058 UHF Jack to Jack Adapter



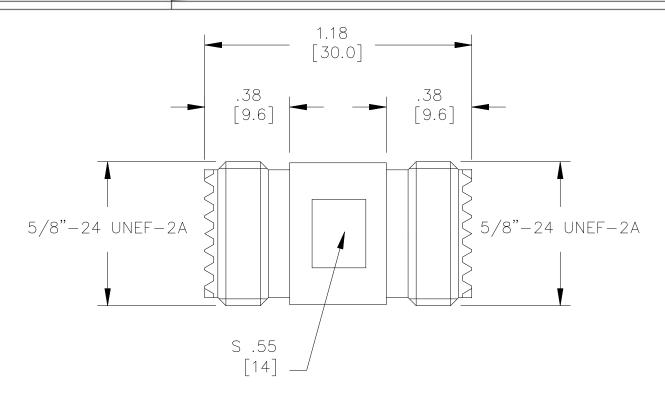

Model 73058 UHF Jack to Jack Adapter

Features

- DC 300MHz bandwidth.
- Connectors are precision machined.

Materials

Center Conductor: Phosphor Bronze, Gold Plated

Connector Body: Brass, Nickel Plated

Insulators: PTFE

Specifications

Frequency Range: DC - 300MHz

Contact Resistance:

Center Conductor: ≤1.0 mΩ Outer Conductor: ≤0.2 mΩ Insulation Reistance: ≥ 300 MΩ

Dielectric Withstand Voltage: 750V

For CE compliance, do not hold in hand when

voltages exceed 33 Vrms / 70 Vdc.

Number of Insertions: 500 cycles minimum

Ordering Information

Model: 73058

USA: Sales: 800-490-2361

Technical Support: technicalsupport@pomonatest.com

Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 International: 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Adapters - In Series category:

Click to view products by Pomona manufacturer:

Other Similar products are found below:

5916-1103-603 5918-1103-000 5919-1503-000 651A505 82-5552 9030-9523-502 A0407000 R114703000W R125704000 R125771001

R141710000W R141723161 R141730000 R143730700 R143770000 R161703000W R161730000 R161753000W R161791530W

R201705000 R222705200 R222M40010W R223703180 R316754000 R405006000 R443162000 AD78TL HRM-513S 1996352-2

2157155-1 252169-75 AD158 2101130-1 252186 R114704000W R114720000W R125705001 R125705701 R125771000 R125771001W

R125791501W R127704001 R127.870.001 R127872001 R141717000 R142710000 R142723000 R143703000 R143704000 R143705700