


Model 73066

MMCX Right-Angle Plug to SMA Bulkhead Jack, RG316/U



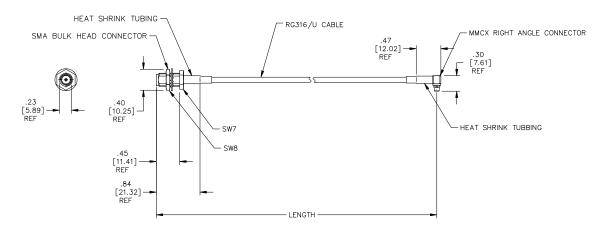

Model 73066 MMCX Right-Angle Plug to SMA Bulkhead Jack, RG316/U

Small size, and durability for confident connections

Materials

MMCX Male Connector:

Center Contact: Phosphor Bronze, Gold Plated

Connector Body: Brass, Gold Plated Crimp Ferrule: Copper, Nickel Plated

Insulators: PTFE SMA Female Connector:

Center Contact: Beryllium Copper, Gold Plated

Connector Body: Brass, Gold Plated Crimp Ferrule: Copper, Nickel Plated

Insulators: PTFE

USA: Sales: 800-490-2361

Technical Support: technicalsupport@pomonatest.com

Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 International: 425-446-5500

Where to Buy: www.pomonaelectronics.com

Features

- DC 3GHz bandwidth.
- Connectors are precision machined and gold-plated for low loss.
- Perfect for applications where space, weight, performance and ease of connection are required.

Specifications

Cable Type	RG316/U
Impedance	50Ω
Frequency Range	DC - 3GHz
Insulation Resistance	≥ 500 MΩ
Insulator Withstand	500V
	-55° C to +155°C
Temperature Range	(-67°F to +311°F)
Jacket	FEP
Cable O.D.	0.098" (2.5mm)
	7 x .18 silver coated
Center Conductor (mm)	copper covered steel

Ordering Information

Model: 73066

Cable Designator: **BB** = RG316/U Standard Lengths: **12**", **24**", **36**", **48**"

- 12" ± .157" (305mm ± 4mm) - 24" ± .275" (610mm ± 7mm) - 36" ± .394" (914mm ± 10mm) - 48" ± .512" (1219mm ± 13mm)

Ordering Example: 73066-BB-36, Cable is RG316/U

with length of 36" (914mm)

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Cable Assemblies category:

Click to view products by Pomona manufacturer:

Other Similar products are found below:

73-6352-10 73-6353-3 73-6364-6 R285001001 R288940004 R288940005 145111-05-12.00 1661-C-24 1801171170914KE 24P104C24J1-012 24P104C24P1-006 24P104C24P1-018 24P204C24J1-003 172-2150-EX 1800920920914PJ FCB-3030-ALT 21117-046 21117-050 PCX-24-50 24P103C24P2-003 25P203C25P2-003 PTWY-24-78 R284008001 R285001021 R285426000 R288940003 R288940008 RF179-74BJ3-77RP1-0305 4814-BB-24 5260-72 JT2N1-CL1-1F DLP-COAX1 4814-K-48 115101-09-06.00 CCNTN2-MM-LL335-26 73-6351-25 73-6352-3 73-6353-25 1800920920610PJ GD0BQ0BQ024.0 1-3636-600-5210 TL8A-11SMA-11SMA-01500-51 R284C0351060 R288940009 R288040009 R288040002 9702-1SL-1 PT82NSMA 73-6353-10 R285020301W