
Pomona®

Model 2948 Stacking Standard Banana Plug Each End

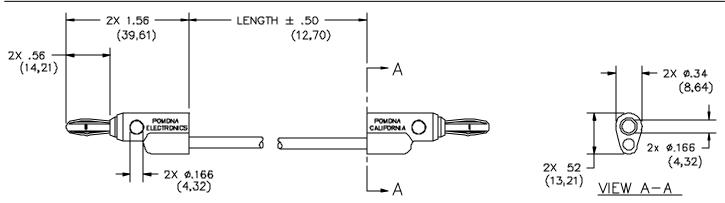

FEATURES:

- Multiple stacking feature accommodates the most complex stacking; keeps circuitry neater.
- Greatly simplifies circuit connections and changes.
- Reliable solder bonded connections withstand pull test in excess of 50 lbs.
- Vertical and cross stackable.
- Mates to Model #1581, 2854 or any standard banana jack.

MATERIALS:

Conn: Stacking Banana Plug

Material: Spring – Beryllium Copper per QQ-C-533, Alloy 172, Cond. HT.

Plug Body – Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Gold plated per MIL-G-45204, Type II, Class 00 over electroless nickel.

Insulation: Polypropylene molded to plug body and wire.

Color: Matches color of wire.

Marking: "POMONA ELECTRONICS" "POMONA CALIFORNIA." Wire: 18 AWG stranding 65 x 36 t.c., PVC insulated, 3.66 (.144) O.D.

Marking: "POMONA 2948-XX"

RATINGS:

Operating Temperature: +55° C. (+131° F.) Max.

Operating Voltage: Hand-held testing: 30VAC/60VDC Max.

Hands free testing in controlled voltage environments: 5000 WVDC Max.

Current: 15 Amperes

ORDERING INFORMATION: Model 2948-XX-*

XX= Cable Lengths, Standard Lengths: 12" (305), 24" (610), 36" (914), 48" (1219) & 60" (1524). Additional lengths can be quoted upon request.

*=Color, -0 Black, -2 Red Ordering Example: 2948-60-2 Indicates 60" in length, Color is Red

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99 Sales: 800-490-2361 Fax: 888-403-3360
SY/EH/LS Technical Assistance: 800-241-2060
S:\Engineering\Release\DataSheet\FlukeDataSheet\d2948_1_01.doc

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Test Plugs & Test Jacks category:

Click to view products by Pomona manufacturer:

Other Similar products are found below:

01-2601-4-0210 01-2601-4-0212 01-2604-4-0212 01-2604-5-0210 01-2150-1-0312 01-2350-1-02 01-2352-1-02 01-2368-1-02 01-2604-4-0210 01-2604-5-0212 01-2606-5-0212 M39024/10-01G M39024/10-17G M39024/11-09G M39024/11-42 M39024/11-43 M39024/12-08 707-5311 707-5402-01-19 707-5410 923739-40-I R644543000 R948161000 R999351000 1408-4 1499-101 1533-1 1659559 1659567 1663921 1663939 1696-102 174-R825B-EX NYS508-BU NYS508-O 211-101 RS100GBL RS250GBL 251-102 25-2251-2-03 25-2259-2-03 923743-16-I 923743-24-I 923743-28-I 2854-BLU 2970-BLK 30-443G 1680