
Pomona®

Model PT080 High Density Pin Tip Plug, Each End

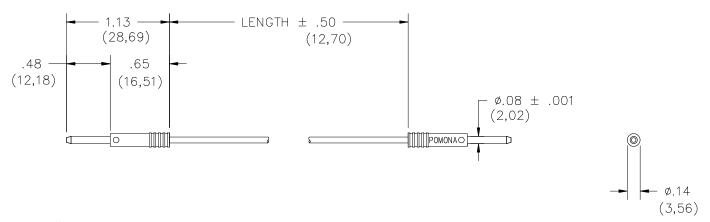

FEATURES:

• Mate to Model #3542, 4773 or any other standard .08 inch pin jack.

• Ideal for use as jumper wires on chassis boxes.

MATERIALS:

Conn: Pin Tip Plug

Material: Brass Per QQ-B-626, Alloy 360, 1/2 Hard.

Finish: Gold plated per MIL-G-45204, Type II, Class 00 over electroless nickel per MIL-C-26074,

Class I, 200/300 microinches.

Insulation: Polypropylene molded to plug body and wire.

Color: Matches color of wire.

Marking: "POMONA ELECTRONICS CALIF."

Wire: 22 AWG, stranding 19 x 34, t.c., PVC insulated, 1.63 (.064) O.D.

Color: See Ordering Information. Marking: "POMONA PT080-XX"

RATINGS:

Operating Temperature: +55°C (+131°F) Max

Operating Voltage: 1000 WVDC

Current: 3 Amperes Cont.

ORDERING INFORMATION: Model PT080-XX-*

XX = Cable Lengths, Standard Lengths: 8" (203mm)

Additional lengths can be quoted upon request.

*= Color, -0 Black, -2 Red

Ordering Example: PT080-8-2, Indicates 8" in length, Color is Red

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (.51 mm), $.xxx = \pm .005$ " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Made in USA

10/1/07

D1095064 Rev. 100 Sales: 800-490-2361 Fax: 425-446-5844 Technical Support: technicalsupport@pomonatest.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Test Plugs & Test Jacks category:

Click to view products by Pomona manufacturer:

Other Similar products are found below:

01-2601-4-0210 01-2601-4-0212 01-2604-4-0212 01-2604-5-0210 01-2150-1-0312 01-2350-1-02 01-2352-1-02 01-2368-1-02 01-2604-4-0210 01-2604-5-0212 01-2606-5-0212 M39024/10-01G M39024/10-17G M39024/11-09G M39024/11-42 M39024/11-43 M39024/12-08 707-5311 707-5402-01-19 707-5410 923739-40-I R644543000 R948161000 R999351000 1408-4 1499-101 1533-1 1659559 1659567 1663921 1663939 1696-102 174-R825B-EX NYS508-BU NYS508-O 211-101 RS100GBL RS250GBL 251-102 25-2251-2-03 25-2259-2-03 923743-16-I 923743-24-I 923743-28-I 2854-BLU 2970-BLK 30-443G 1680