


35NT2R32

Ø 35 mm • Graphite-Copper commutation • 56 mNm

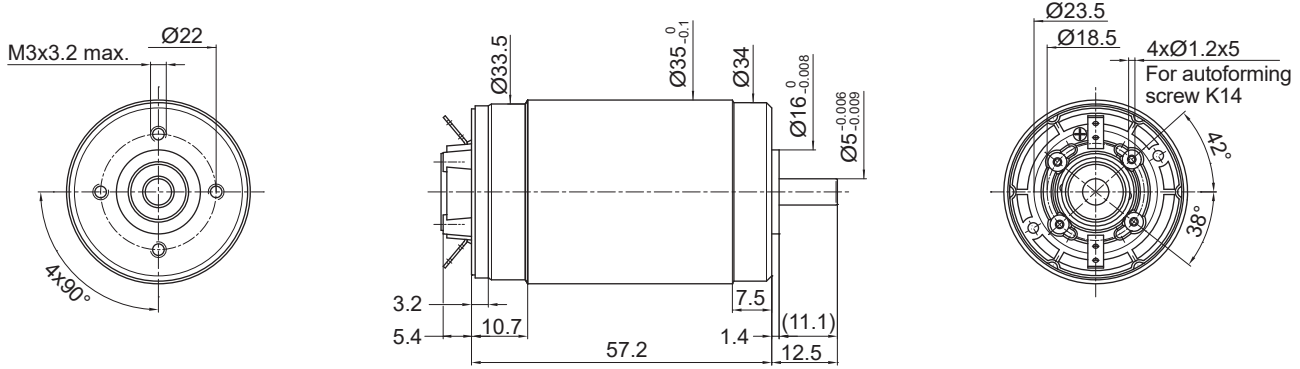


Dimensions in mm.

Electrical Data	Symbol	35NT2R32 **** .1			Unit
		228P	228E	416SP	
1 Nominal Voltage	V	9	15	24	Volt
2 No-Load Speed	n_0	5,020	4,315	4,365	rpm
3 No-Load Current	I_0	180.0	90.0	50.0	mA
4 Terminal Resistance	R	1.0	3.6	8.3	Ω
5 Output Power	P_{2max}	33.0	33.0	35.0	W
6 Stall Torque	mNm	151 (21.39)	137 (19.41)	150 (21.25)	mNm (oz-in)
7 Efficiency	η_{max}	74	73	75	%
8 Max Continuous Speed	$n_{e max}$	9,000	9,000	9,000	rpm
9 Max Continuous Torque	$M_{e max}$	52 (7.65)	54 (7.65)	56 (7.94)	mNm (oz-in)
10 Max Continuous Current	$I_{e max}$	3.30	1.75	1.18	A
11 Back-EMF Constant	k_E	1.76	3.40	5.40	mV/rpm
12 Torque Constant	k_M	16.80	32.50	51.60	mNm/A
13 Motor Regulation	R/k^2	3.5	3.4	3.1	$10^3/Nms$
14 Friction Torque	T_F	3 (0.43)	2.93 (0.42)	2.6 (0.37)	mNm (oz-in)
15 Rotor Inductance	L	0.13	0.52	1.30	mH
16 Mechanical Time Constant	τ_m	16.8	16.3	16.2	ms
17 Rotor Inertia	J	48.00	48.00	52.00	g-cm ²

General Data					
18 Thermal Resistance (rotor/body)	R_{th1}/R_{th2}	4/8			$^{\circ}C/W$
19 Thermal Time Constant (rotor/stator)	t_{W1}/t_{W2}	40/920			S
20 Operating Temperature Range:	motor	-30 $^{\circ}C$ to 85 $^{\circ}C$ (-22 $^{\circ}F$ to 185 $^{\circ}F$)			$^{\circ}C$ ($^{\circ}F$)
	rotor				100 $^{\circ}C$ (212 $^{\circ}F$)
21 Shaft Load Max.: (5 mm. from bearing)	-radial -axial	With ball bearings			
			35.0 (125.9)		N (oz)
			100 (359.6)		N (oz)
22 Shaft Play:	-radial	negligible			mm (inch)
	-axial	negligible			mm (inch)
23 Weight	g	310 (10.94)			g (oz)
24 Commutation Segment	-	13			segment

Execution Table

Gearbox	Single Shaft	E9	HEDS
R32	54	66	Upon Request
R40	1	96	Upon Request

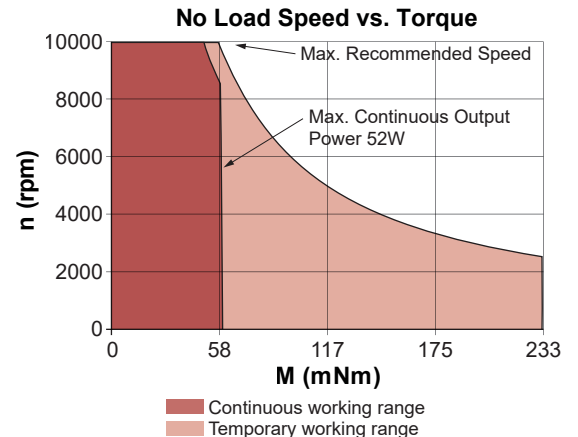

► Motor shaft rotates CW when seen from motor front face when +ve and -ve supply is given to respective terminals.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [portescap](#) manufacturer:

Other Similar products are found below :

[12G88-213E.1001](#) [22S28-205E.1](#) [16N1R78214E1005](#) [16G88-208E.1](#) [08G61-105.1](#) [22S28-208E.1](#) [16N78-210E.1001](#) [35NT2R32-416SP.1](#)
[17N78213E1](#) [17N78-208E.1](#) [17S78-208P.1](#) [22S28-210P.1](#) [17N1R78213E1](#) [17S78-209E.1](#) [22N78313P1001](#) [13N88-110.1](#) [12G88-215E.1001](#)
[16N78-212E.1001](#) [35GLT2R82-326P.1](#) [16G88-211E.1](#) [22N78-311P.1001](#) [22N78-319P.1001](#) [16N78-212P.1001](#) [16N28-207E.201](#) [16G88-](#)
[220P.1](#) [16N78214E1001](#) [22V28-213E.201](#) [30GT2R82-234E.4](#) [16N28-210E.1](#) [13N88-213E.1](#) [16N78-208E.1001](#) [16N78-135.1001](#) [22N28-](#)
[213E.286](#) [16N28-208E.202](#) [22N28-210E.286](#) [16G88-213E.1](#) [08GS61-105C.1](#) [13N88-216E.1](#)