



HQS-9.6W-120LED-W-24V

Professional Led Strip, 9.6 W/m



■ Features:

- Double copper layer
- Can be cut every segment 5 cm
- 3 years warranty



6500K
WHITE




TECHNICAL DETAILS

MODEL	HQS-9.6W-120LED-W-24V	EPREL
Supply voltage	24V ± 0.5Vdc	
Power	9.6W/m (48W/reel)	
Current	0.4 A/m (2A/roll)	
Power per reel	48W	
Color temperature	6500K	
Beam angle	120°	
Luminous flux	1060 lm/m (5300lm/roll)	
CRI	>80	
Maximum length for one sided supply	5m	
IP protection degree	IP33	
Working temperature	-25°C ÷ 50°C	
Storage temperature	-30°C ÷ 60°C	
LED QTY	120 LEDs/m (600 LEDs/reel)	
Width PCB	8mm	
Cut section	50mm	
Connection wire	2 x AWG20 (0.52 mm ²) stranded wire, length = 140 mm: V+: red: V-:black.	
Dimensions (L x W x H)	5000 x 8 x 1.2 mm	
Packing	5m / reel (bag)	



MW LIGHTING
HQS-9.6W-120LED-W-24V

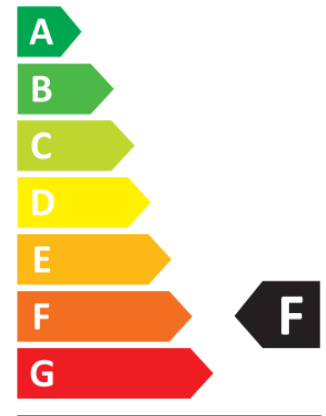


5
kWh/1000h



2019/2015

MECHANICAL SPECIFICATION:

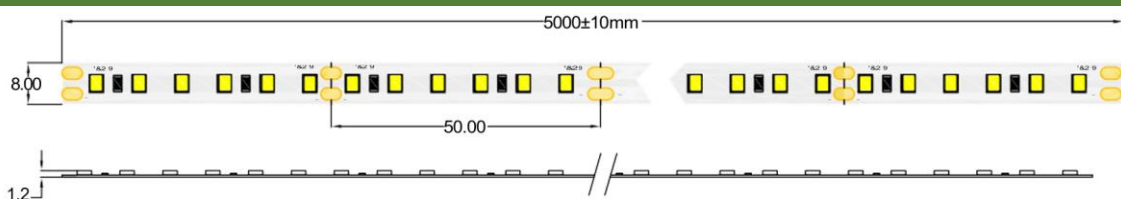

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Bars and Strips](#) category:

Click to view products by [POS manufacturer](#):

Other Similar products are found below :

[LFBLL-SW823-24V-8S125-20](#) [LFBHL-SW927-24V-8S63-20](#) [RF-G30HI3510-241202081-A0 IP20](#) [RF-GW2H39W19-2406020I1-A1 IP20](#)
[HH-SX144F008W24 -2835 WW WHITE PCB IP20](#) [N004120BB1LZ \(6000K\)](#) [N004120BC1LZ \(3000K\)](#) [N008120BB1LZ \(BLUE\)](#)
[N008120BC1LZ \(4000K\)](#) [S008144CA4SA1/C1 \(RGB+4000K IP20\)](#) [S0121134ZC3PZ](#) [COB-480-CW-24-10W](#) [HQS-14.4W-60LED-RGB-](#)
[WP-12V-5M](#) [N013060CA3SA1](#) [HQS-12W-60LED-W-WP-24V-5M](#) [UQS-COB-12W-NW-24V-5M](#) [HH-SNW480F208W24-COB-R](#) [HQS-](#)
[12W-60LED-NW-WP-12V-5M](#) [S012120BC1HZ \(WARM WHITE\)](#) [HQS-6W-60LED-WW-WP-24V-5M](#) [COB-480-NW-24-10W](#)
[S020240BC1DC0/C3](#) [S012060CB4SA1/C2](#) [HQS-12W-60LED-WW-WP-24V-5M](#) [HH-SW480F008W24-COB-R](#) [HH-SWW320F008W24-](#)
[COB-R](#) [COB-480-WW-24-10W](#) [HQS-6W-60LED-NW-WP-12V-5M](#) [S012060CC4DC0/C3](#) [HH-SWW320F208W12-COB-R](#) [S012048CB4PZ](#)
[\(RGB+W:3000K\)](#) [HQS-9.6W-120LED-NW-WP-12V-5M](#) [S012480ZB1SF \(WARM WHITE IP20\)](#) [HQS-6W-60LED-WW-12V-5M](#)
[S012120BC1HZ \(COLD WHITE\)](#) [HQS-6W-60LED-W-WP-12V-5M](#) [HQS-6W-60LED-W-12V-5M](#) [HQS-9.6W-120LED-NW-24V-5M](#) [HQS-](#)
[9.6W-120LED-NW-12V-5M](#) [HQS-12W-60LED-WW-12V-5M](#) [S012480ZB1SF \(COLD WHITE IP20\)](#) [HH-SRGB60F310W12-5050 WHITE](#)
[PCB IP65A](#) [S010120BC3SM/C1](#) [UQS-COB-12W-W-24V-5M](#) [HQS-6W-60LED-NW-12V-5M](#) [HH-SW60F008W12-3528 CW WHITE PCB](#)
[IP20](#) [HQS-6W-60LED-NW-24V-5M](#) [S004060BB3PZ/C2](#) [TAMA LED K2-30-1920-24V 19,2W/M](#) [TAMA LED K-30-2400-24V 24W/M](#)