


Single IGBTMOD™ H-Series Module 300 Amperes/600 Volts

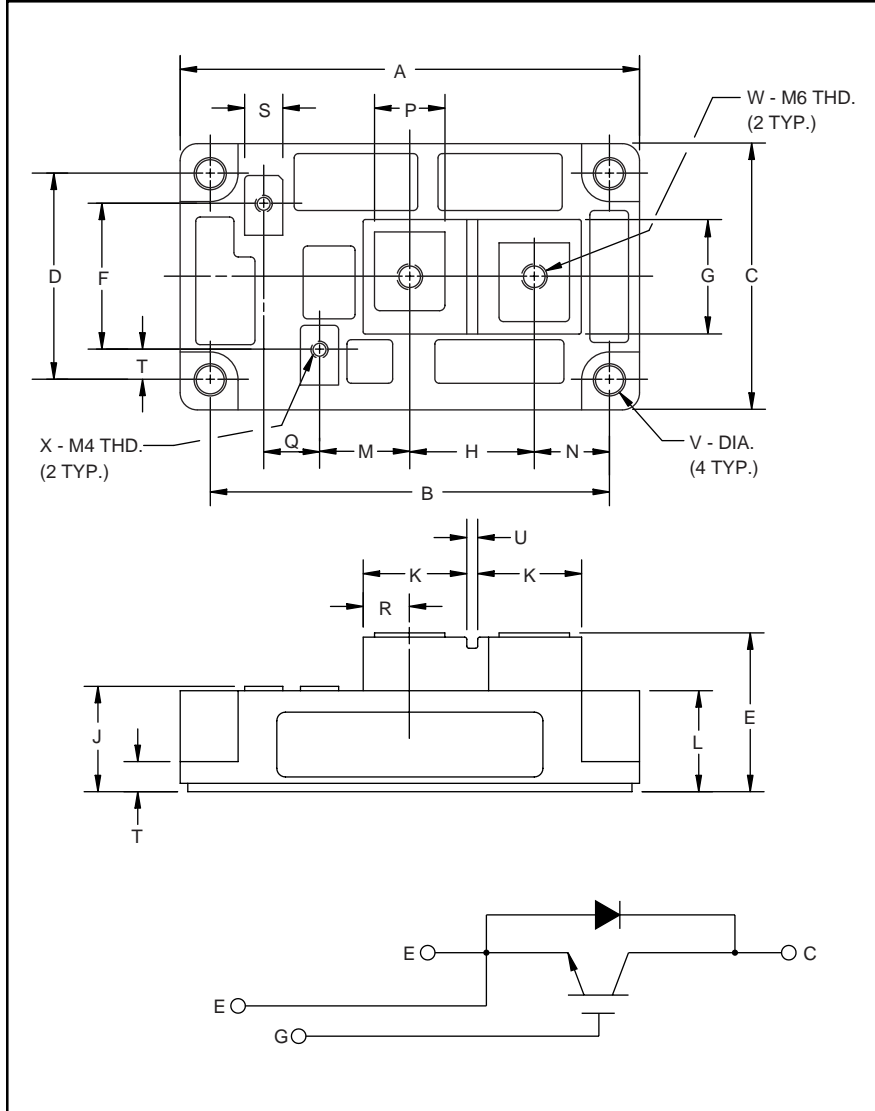

Outline Drawing and Circuit Diagram

| Dimensions | Inches | Millimeters |
|------------|------------|-------------|
| A | 4.21 | 107.0 |
| B | 3.661±0.01 | 93.0±0.25 |
| C | 2.44 | 62.0 |
| D | 1.89±0.01 | 48.0±0.25 |
| E | 1.42 Max. | 36.0 Max. |
| F | 1.34 | 34.0 |
| G | 1.18 | 30.0 |
| H | 1.14 | 29.0 |
| J | 0.98 Max. | 25.0 Max. |
| K | 0.94 | 24.0 |
| L | 0.93 | 23.5 |

| Dimensions | Inches | Millimeters |
|------------|-----------|-------------|
| M | 0.83 | 21.0 |
| N | 0.69 | 17.5 |
| P | 0.63 | 16.0 |
| Q | 0.51 | 13.0 |
| R | 0.43 | 11.0 |
| S | 0.35 | 9.0 |
| T | 0.28 | 7.0 |
| U | 0.12 | 3.0 |
| V | 0.26 Dia. | Dia. 6.5 |
| W | M6 Metric | M6 |
| X | M4 Metric | M4 |



Description:

Powerex IGBTMOD™ Modules are designed for use in switching applications. Each module consists of one IGBT Transistor in a single configuration with a reverse-connected super-fast recovery free-wheel diode. All components and interconnects are isolated from the heat sinking baseplate, offering simplified system assembly and thermal management.

Features:

- Low Drive Power
- Low $V_{CE(sat)}$
- Discrete Super-Fast Recovery (70ns) Free-Wheel Diode
- High Frequency Operation (20-25kHz)
- Isolated Baseplate for Easy Heat Sinking

Applications:

- AC Motor Control
- Motion/Servo Control
- UPS
- Welding Power Supplies
- Laser Power Supplies

Ordering Information:

Example: Select the complete part module number you desire from the table below -i.e. CM300HA-12H is a 600V (V_{CES}), 300 Ampere Single IGBTMOD™ Power Module.

| Type | Current Rating Amperes | V_{CES} Volts (x 50) |
|------|---------------------------|---------------------------|
| CM | 300 | 12 |

CM300HA-12H
Single IGBTMOD™ H-Series Module
 300 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified

| Ratings | Symbol | CM300HA-12H | Units |
|---|------------------|-------------|------------------|
| Junction Temperature | T_j | -40 to 150 | $^\circ\text{C}$ |
| Storage Temperature | T_{stg} | -40 to 125 | $^\circ\text{C}$ |
| Collector-Emitter Voltage (G-E SHORT) | V_{CES} | 600 | Volts |
| Gate-Emitter Voltage | V_{GES} | ± 20 | Volts |
| Collector Current | I_C | 300 | Amperes |
| Peak Collector Current | I_{CM} | 600* | Amperes |
| Diode Forward Current | I_F | 300 | Amperes |
| Diode Forward Surge Current | I_{FM} | 600* | Amperes |
| Power Dissipation | P_d | 1100 | Watts |
| Max. Mounting Torque M6 Terminal Screws | - | 26 | in-lb |
| Max. Mounting Torque M6 Mounting Screws | - | 26 | in-lb |
| Module Weight (Typical) | - | 400 | Grams |
| V Isolation | V_{RMS} | 2500 | Volts |

* Pulse width and repetition rate should be such that device junction temperature does not exceed the device rating.

Static Electrical Characteristics, $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|--------------------------------------|----------------------|--|------|------|-------|---------------|
| Collector-Cutoff Current | I_{CES} | $V_{\text{CE}} = V_{\text{CES}}, V_{\text{GE}} = 0\text{V}$ | - | - | 1.0 | mA |
| Gate Leakage Current | I_{GES} | $V_{\text{GE}} = V_{\text{GES}}, V_{\text{CE}} = 0\text{V}$ | - | - | 0.5 | μA |
| Gate-Emitter Threshold Voltage | $V_{\text{GE(th)}}$ | $I_C = 30\text{mA}, V_{\text{CE}} = 10\text{V}$ | 4.5 | 6.0 | 7.5 | Volts |
| Collector-Emitter Saturation Voltage | $V_{\text{CE(sat)}}$ | $I_C = 300\text{A}, V_{\text{GE}} = 15\text{V}$ | - | 2.1 | 2.8** | Volts |
| | | $I_C = 300\text{A}, V_{\text{GE}} = 15\text{V}, T_j = 150\text{ }^\circ\text{C}$ | - | 2.15 | - | Volts |
| Total Gate Charge | Q_G | $V_{\text{CC}} = 300\text{V}, I_C = 300\text{A}, V_{\text{GS}} = 15\text{V}$ | - | 900 | - | nC |
| Diode Forward Voltage | V_{FM} | $I_E = 300\text{A}, V_{\text{GS}} = 0\text{V}$ | - | - | 2.8 | Volts |

** Pulse width and repetition rate should be such that device junction temperature rise is negligible.

Dynamic Electrical Characteristics, $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units | |
|-------------------------------|---------------------|--|---|---|------|---------------|-----|
| Input Capacitance | C_{ies} | | - | - | 30 | nF | |
| Output Capacitance | C_{Oes} | $V_{\text{GE}} = 0\text{V}, V_{\text{CE}} = 10\text{V}, f = 1\text{MHz}$ | - | - | 10.5 | nF | |
| Reverse Transfer Capacitance | C_{res} | | - | - | 6 | nF | |
| Resistive | Turn-on Delay Time | $t_{\text{d(on)}}$ | - | - | 350 | ns | |
| | Load | Rise Time | t_r | $V_{\text{CC}} = 300\text{V}, I_C = 300\text{A},$ | - | - | 600 |
| Switching | Turn-off Delay Time | $t_{\text{d(off)}}$ | $V_{\text{GE1}} = V_{\text{GE2}} = 15\text{V}, R_G = 2.1\Omega$ | - | - | 350 | ns |
| | Times | Fall Time | t_f | - | - | 300 | ns |
| Diode Reverse Recovery Time | t_{rr} | $I_E = 300\text{A}, di_E/dt = -600\text{A}/\mu\text{s}$ | - | - | 110 | ns | |
| Diode Reverse Recovery Charge | Q_{rr} | $I_E = 300\text{A}, di_E/dt = -600\text{A}/\mu\text{s}$ | - | 0.81 | - | μC | |










Thermal and Mechanical Characteristics, $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|--------------------------------------|----------------------|------------------------------------|------|------|-------|---------------------------|
| Thermal Resistance, Junction to Case | $R_{\text{th(j-c)}}$ | Per IGBT | - | - | 0.11 | $^\circ\text{C}/\text{W}$ |
| Thermal Resistance, Junction to Case | $R_{\text{th(j-c)}}$ | Per FWDi | - | - | 0.24 | $^\circ\text{C}/\text{W}$ |
| Contact Thermal Resistance | $R_{\text{th(c-f)}}$ | Per Module, Thermal Grease Applied | - | - | 0.040 | $^\circ\text{C}/\text{W}$ |





Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

CM300HA-12H
Single IGBTMOD™ H-Series Module
 300 Amperes/600 Volts

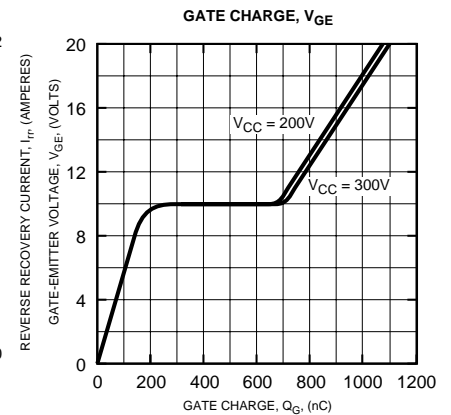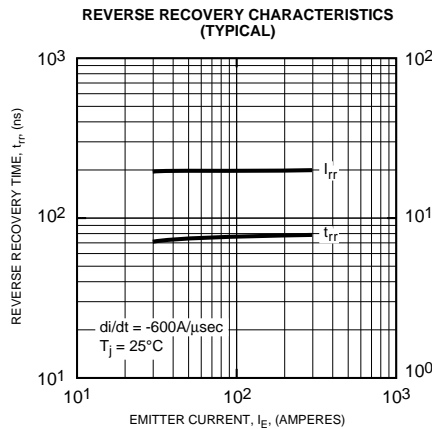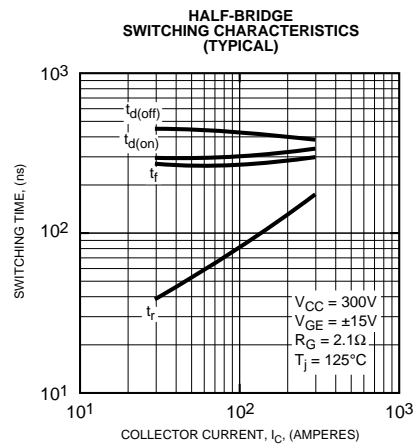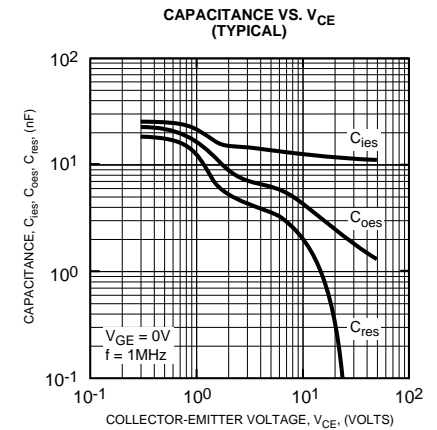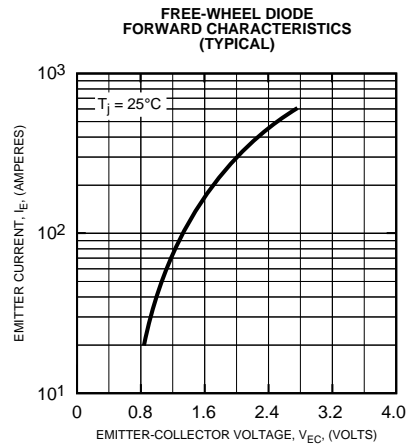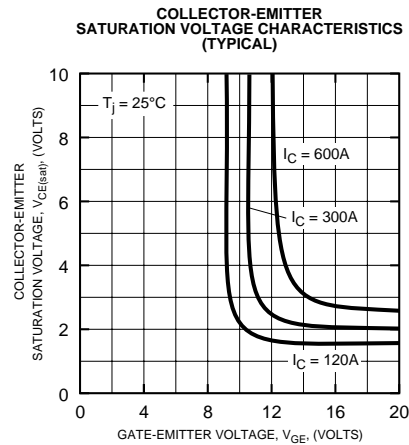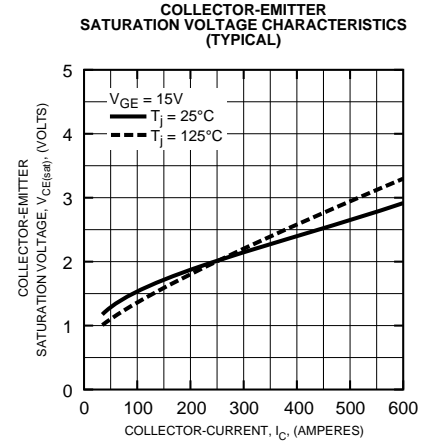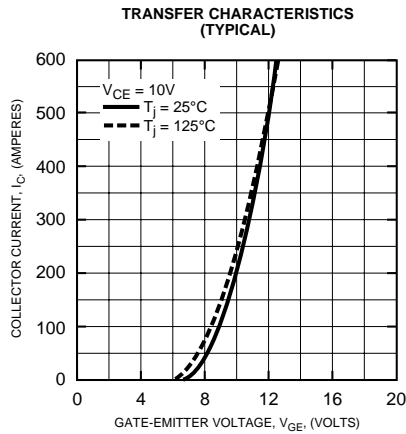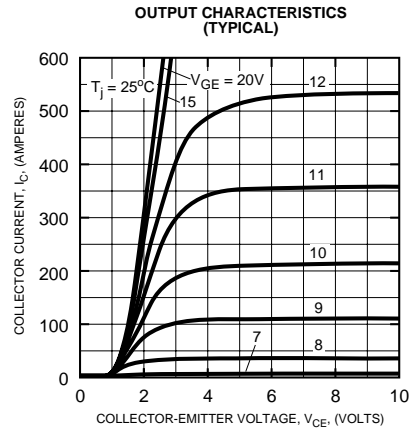

CM300HA-12H
Single IGBTMOD™ H-Series Module
 300 Amperes/600 Volts

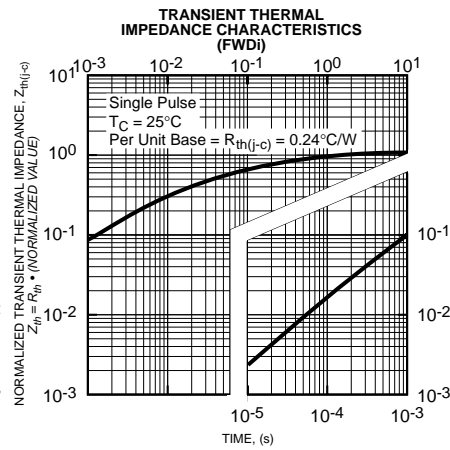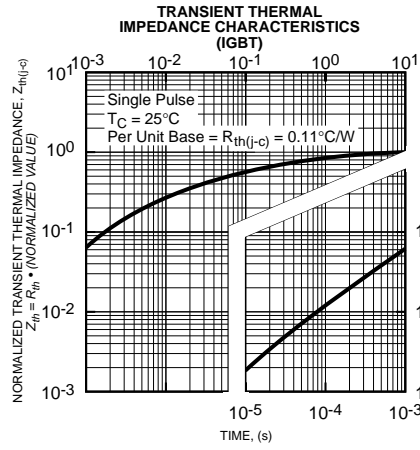

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [powerex manufacturer](#):

Other Similar products are found below :

[R7013003XXUA](#) [R9G01212XX](#) [VLA541-01R](#) [QRD0630T30](#) [CM400DY-24NF](#) [CM100TX-24S1](#) [CM600HA-24A](#) [NLD422PB](#)
[PSM03S93E5-A](#) [BP2B-V](#) [ND431625](#) [R5031213LSWS](#) [BG2B](#) [BG2C-5015](#) [ND431825](#) [T9G0121203DH](#) [CD611616C](#) [BG1A-PX](#)
[TCS4402802DH](#) [CD421690C](#) [PM600DVA060](#) [CD411899C](#) [CD631615B](#) [C601PB](#) [R5021213LSWS](#) [BG2A-NFH](#) [C180PB](#) [CD431690B](#)
[NLR425CM](#) [HARDWARE KIT 50](#) [CD410899C](#) [CM400HA-24A](#) [CD411699C](#) [LEAD KIT #NK](#) [HARDWARE KIT 49](#) [VLA500-01](#)
[HARDWARE KIT 87](#) [VLA106-24154](#) [VLA502-01](#) [VLA106-15242](#)