



- Active Power Factor Correction
- Efficiency Level V
- >87% Efficient
- <500mW No Load Power Consumption
- Short Circuit Protection
- Overload Protection
- Overvoltage Protection
- No Load Operation
- 100% Burn-In/Hi-Pot Testing
- RoHS Compliant

Electrical Specifications

Input

Input Voltage	90-264VAC
Input Frequency	47-63 Hz
Input Current	3A @ 90VAC / 1.5A @ 264VAC
Power Factor	Per EN61000-3-2
Leakage Current	<250µA @ 264VAC
Safety Isolation	3.0kVAC Input to Output 1.5kVAC Input to Ground

Environmental & Operating

Operating Temperature	-20°C to +40°C Derate from 100% to 40%, from +40°C to +70°C
Storage Temperature	-20°C to +85°C
Forced Air Cooling	40mm Temperature Controlled Internal Fan
Humidity	10% - 95% non-condensing
MTBF:	>140,000 @ full load and 25°C per MIL-HDBK-217F

Output

Total Output	200W
Output Voltage	See table
Hold Up Time	16mS minimum/full load/115VAC
Efficiency	>87%
Minimum Load	No minimum load
Transient Response	+/-5% maximum with 100% load step 200mA per µsec maximum
Turn-On Delay	2 seconds maximum

Compliance

Safety Approvals

USA	UL60950-1
Canada	CSA C22.2 No. 60950-1
Europe	TUV EN60950-1 CB Report
EMC:	FCC Class B Radiated & Conducted CISPR22 Class B Radiated & Conducted EN55022 Class B Radiated & Conducted EN55024: 1998+A1: 2001+A2: 2003 IEC 61000-3-2: 2006, Class D IEC 61000-3-3: 1995+A1: 2001+A2: 2005 IEC 61000-4-2: 1995+A1: 1998+A2: 2000 IEC 61000-4-3: 2006 IEC 61000-4-4: 2004 IEC 61000-4-5: 2005 IEC 61000-4-6: 2007 IEC 61000-4-8: 1993+A1: 2000 IEC 61000-4-11: 2004
Harmonic Currents	
Voltage Flicker	
Electrostatic Discharge	
Radiated Immunity	
EFT/Burst	
Surge Immunity	
Conducted Immunity	
Magnetic Field	
Dips / Interruptions	

Protection

Overvoltage	Set at 110%-140% of nominal.
Short Circuit	Latching mode. Cycle AC for recovery
Overload	Hiccup mode. Auto recovery Hiccup mode. Auto recovery

General


Dimensions	7.42"L x 4.1"W x 2.36"H
AC Input Receptacle	IEC320-C14
DC Output Plug	Kycon KPP-4P or equivalent (see drawing)
Weight	2.05 pounds



Models and Ratings Chart

Model	Voltage	Current	Total Power	Regulation	Ripple & Noise (p-p)
PPWAD200-12	12VDC	16.66A	200W	+5%	240mV
PPWAD200-13-1	16VDC	12.50A	200W	+5%	300mV
PPWAD200-13-2	19VDC	10.53A	200W	+5%	300mV
PPWAD200-13-3	20VDC	10A	200W	+5%	300mV
PPWAD200-14	24VDC	8.33A	200W	+5%	300mV
PPWAD200-17	36VDC	5.55A	200W	+5%	300mV
PPWAD200-18	48VDC	4.166A	200W	+5%	300mV

Mechanical Outline / Output Cable and Pin Assignment

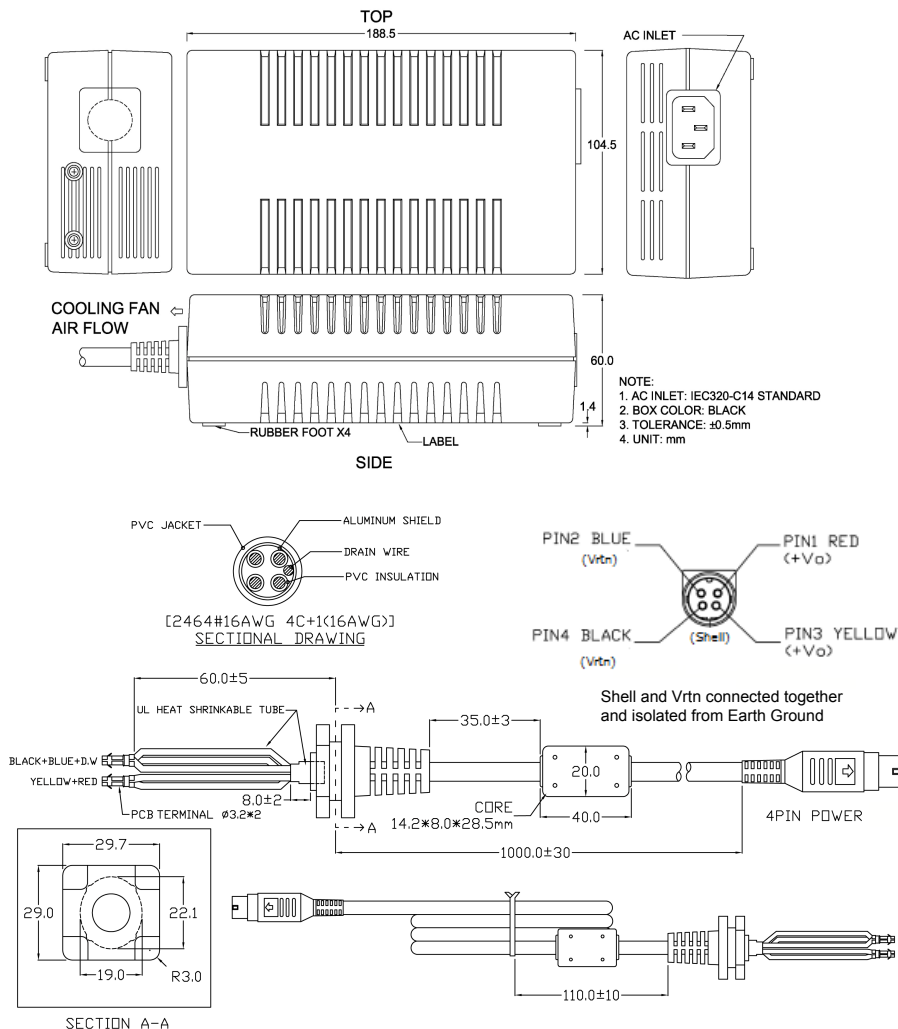

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Desktop AC Adapters](#) category:

Click to view products by [Power Partners](#) manufacturer:

Other Similar products are found below :

[YS50-1903150](#) [ADP-40KD BBBM](#) [DTA27-3X-W-5](#) [212A2136](#) [ADP485-01](#) [SWA-1202](#) [SWA-1501](#) [212A2220](#) [212A2220-02](#) [212A2220-04](#)
[FWE030015A-10A](#) [TRH100A135-02E12-Level-VI](#) [TRH100A180-11E13-Level-VI](#) [TRH100A240-01E13-Level-VI](#) [TRH100A280-01E13-](#)
[Level-VI](#) [TRH100A280-11E13-Level-VI](#) [TRH50A120-02E01-Level-VI](#) [TRH50A120-12E01-Level-VI](#) [TRH50A120-40E01-Level-VI](#)
[TRH50A150-12E12-Level-VI](#) [TRH50A180-11E03-Level-VI](#) [TRH50A240-02E03-Level-VI](#) [TRH70A120-11E01-Level-VI](#) [TRH70A150-](#)
[12E02-Level-VI](#) [TRH70A240-11E03-Level-VI](#) [416FG41017](#) [DTA27-0512FWX-W3](#) [TRH100A120-02E12-Level-VI](#) [TRH100A150-11E12-](#)
[Level-VI](#) [TRH100A180-02E13-Level-VI](#) [TRH100A240-02E13-Level-VI](#) [TRH100A240-36E13-Level-VI](#) [TRH100A280-12E13-Level-VI](#)
[TRH100A480-11E13-Level-VI](#) [TRH100A480-12E13-Level-VI](#) [TRH50A120-11E01-Level-VI](#) [TRH50A120-49E01-Level-VI](#) [TRH50A150-](#)
[11E02-Level-VI](#) [TRH50A150-12E02-Level-VI](#) [TRH70A120-01E01-Level-VI](#) [TRH70A480-02E03-Level-VI](#) [KR8-PS01](#) [1894875](#)
[FWE030012A-10A](#) [FWE050024B-10A](#) [820A4080G](#) [825A0052-03](#) [825A0057-03](#) [SWA-1704W](#) [AD5012N2LM-\(401\)](#)