



- Very High Power Density: 15.27W/in³
- Class I or Class II Configuration
- UL/EN60601-1 Medical Approval
- Small 2"x3" package
- Efficiencies up to 91%
- Suitable for BF Applied Part Applications
- Meets Efficiency Level VI Requirements
- No load power consumption <300mW

Electrical Specifications

Input

Input Voltage	90-264VAC ¹
Input Frequency	47-63 Hz
Input Current (RMS)	2A max. @ 115VAC 1A max. @ 230VAC
Inrush Current	45A max @ 115VAC 90A max @ 230VAC
No Load Power Consumption	<300mW
Power Factor	>0.9 @ 240VDC and 120VDC

Output

Total Output Power	120W with 10CFM Forced Air 100W Convection Only ²
Output Voltage	See models and ratings table.
Hold Up Time	10mS minimum
Efficiency	Up to 91%. See models and ratings table.
Line Regulation	±1%
Voltage Adjustability	±4%
Setpoint accuracy	±2%
Minimum Load	No Minimum Load

Protection Features

Overvoltage	Latch off.
Overtemperature	Latch off.
Overcurrent	Hiccup Mode. OCP Threshold typically 150%.
Short Circuit	Hiccup Mode.

Notes

1. Derate output power by 0.8%/V below 115VAC
2. Derate convection only output power by 10% for U-Channel models. Derate convection only output power by 15% for Enclosed models.
3. See derating curves on the second page for operation above 50°C
4. Dimensions given are those of PCB. I/O conductors extend slightly beyond PCB edge.
5. Testing isolation with an AC generator is not recommended. Either perform isolation testing with a DC voltage, or consult with our engineering staff for AC test considerations.

Environmental

Operating Temperature	-30°C to +70°C ³
Storage Temperature	-30°C to +85°C
Humidity	20% - 90% RH
Operating altitude	<5,000m
MTBF:	>250K hours per MIL-HDBK-217F at full load and 25°C ambient

Safety & EMC

Safety

Approvals

USA/Canada

UL60601-1 3.1 Edition,
UL62368-1 (Pending)
IEC/EN 60601-1 3rd Edition, CB Report,
EN62368-1 (Pending)

Europe

Isolation

Input to Output	4000VAC / 5656VDC ⁵ (2 x MOPP)
Input to Ground	2000VAC / 2828VDC ⁵ (1 x MOPP)
Output to Ground	1500VAC / 2121VDC ⁵ (1 x MOPP)
Touch Current	<100µA at 264Vac

EMC (IEC60601-1-2:2014):

Emissions	EN55011 Class B
Conducted	EN55011 Class B (Class I)
Radiated	EN55011 Class A (Class II)
Susceptibility	IEC/EN60601-1-2: 2007
Harmonic Currents	IEC 61000-3-2: Class A
Voltage Flicker	IEC 61000-3-3
Electrostatic Discharge	IEC 61000-4-2: 15kV Air, 8kV contact
Radiated Immunity	IEC 61000-4-3: 10V/m
EFT/Burst	IEC 61000-4-4: +/-2kV
Surge Immunity	IEC 61000-4-5: 2005 1kV diff, 2kV com
Conducted Immunity	IEC 61000-4-6: 10Vrms
Magnetic Field	IEC 61000-4-8: 30A/m
Dips / Interruptions	IEC 61000-4-11: 30% reduction for 500ms, 100% reduction for 10ms.

Physical

Dimensions	3.04"L x 2"W x 1.31"H Typical
Weight	6.4oz Typical

Your Partners in Power.....

Power Partners, Inc. | 43 Broad Street | Hudson, MA 01749
Tel: (978)567-9600 | Fax: (978)567-9601
Website: www.powerpartners-inc.com





Models and Ratings

Model Number ⁶	Output Voltage	Maximum Load with Convection Cooling ²	Maximum Load with 10CFM Forced Air	Output Load Regulation	Ripple & Noise (Vp-p) ⁷	Max Capacitive Load (µF)	Typical Efficiency at 230VAC
PDAM120-12A	12V	8.333A	10.000A	+/-1%	160mV	3000	90%
PDAM120-14A	24V	4.167A	5.000A	+/-1%	240mV	1500	90%
PDAM120-18A	48V	2.083A	2.500A	+/-1%	480mV	500	91%
PDAM120-12B	12V	7.500A	10.000A	+/-1%	160mV	3000	90%
PDAM120-14B	24V	3.750A	5.000A	+/-1%	240mV	1500	90%
PDAM120-18B	48V	1.875A	2.500A	+/-1%	480mV	500	91%
PDAM120-12C	12V	7.083A	10.000A	+/-1%	160mV	3000	90%
PDAM120-14C	24V	3.541A	5.000A	+/-1%	240mV	1500	90%
PDAM120-18C	48V	1.770A	2.500A	+/-1%	480mV	500	91%

Notes (continued from first page):


- Model number ending with "A" indicates open frame format. Model number ending with "B" indicates U-channel format. Model number ending with "C" indicates enclosed format.
- Measured at 20MHz bandwidth with a 47µF electrolytic and 0.1µF ceramic capacitor in parallel with the DC output rails.
- Input voltage derating and thermal derating are superimposed. The PDAM120 cannot operate with input voltages below 99VAC in thermal environments below -10°C

Derating Curves⁸

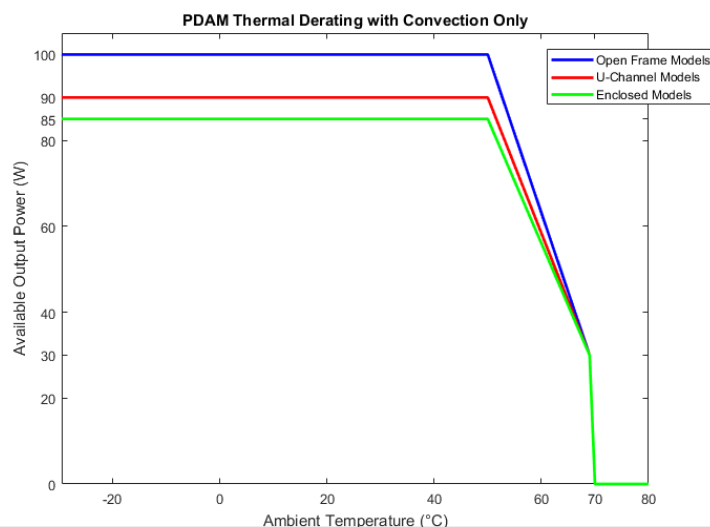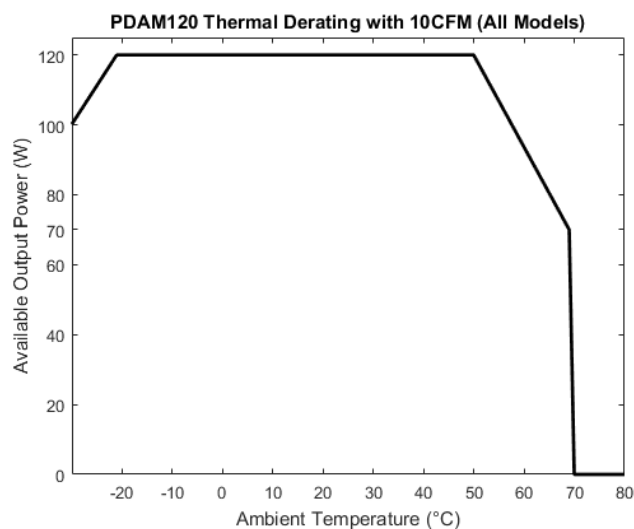




Derating Curves⁸ (Continued)

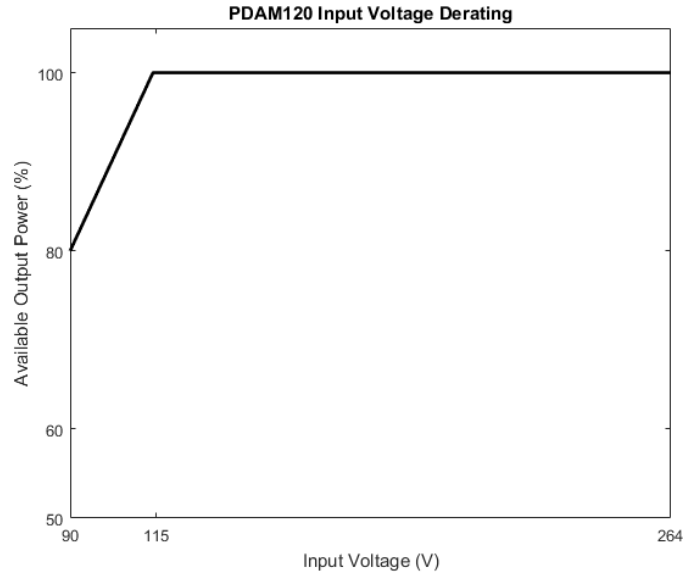


Simplified Block Diagram

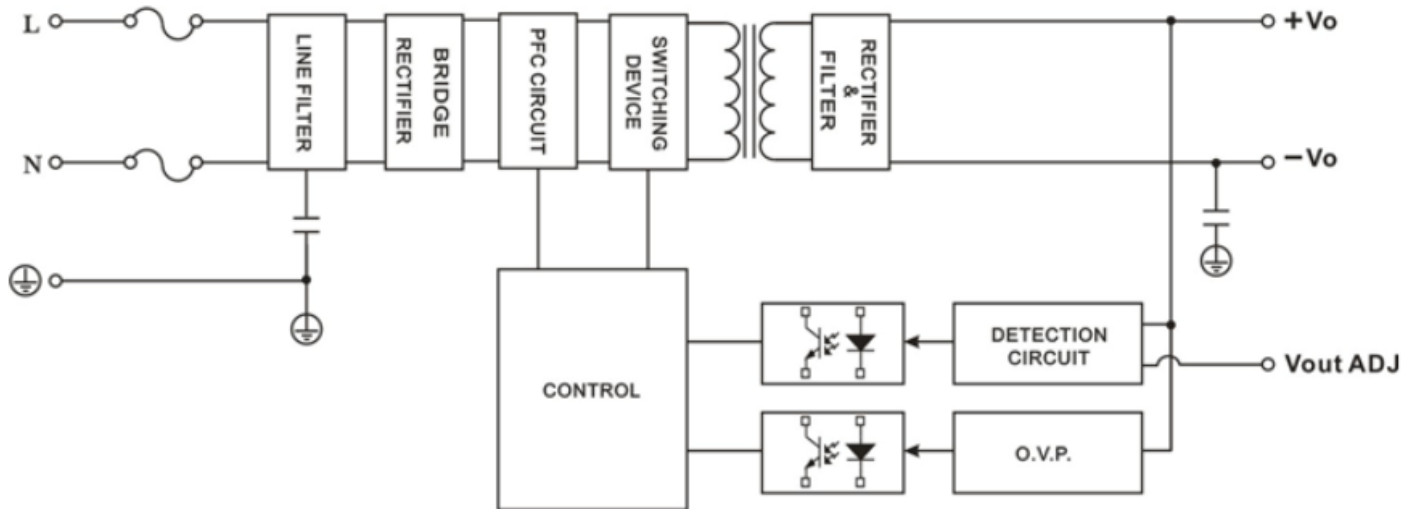



Mechanical Drawing & Pin-out (Open Frame Models)



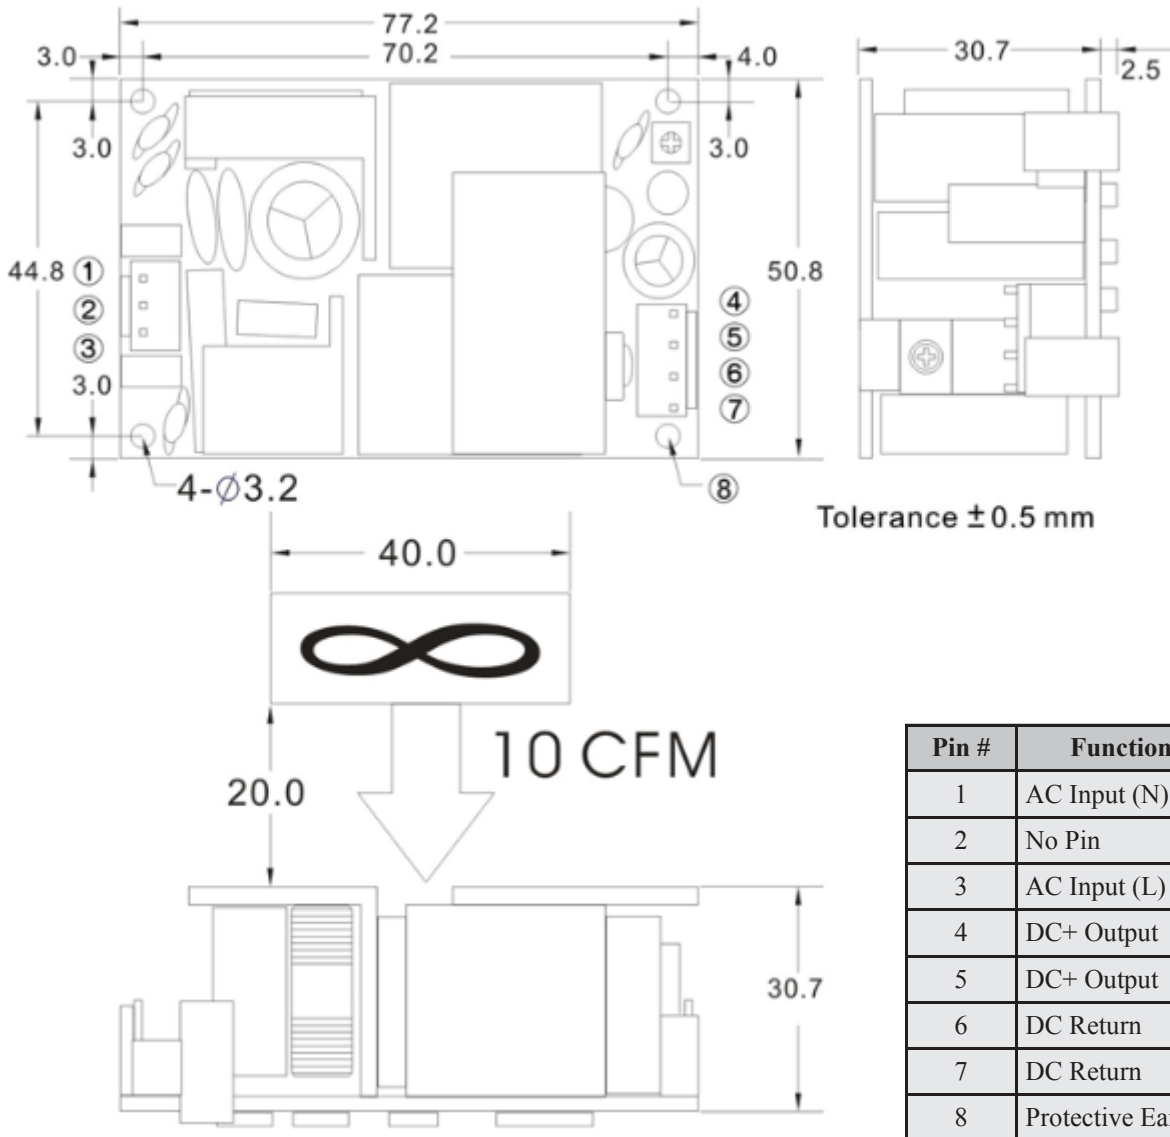


Notes (continued from second page):

- 9. All four mounting holes must be secured to a conductive metal surface to establish protective earth continuity.
- 10. All dimensions in mechanical drawings are given in mm unless otherwise specified



Mechanical Drawing & Pin-out (U-Channel Models)

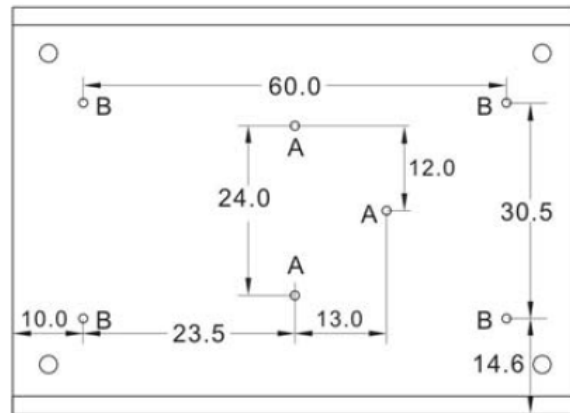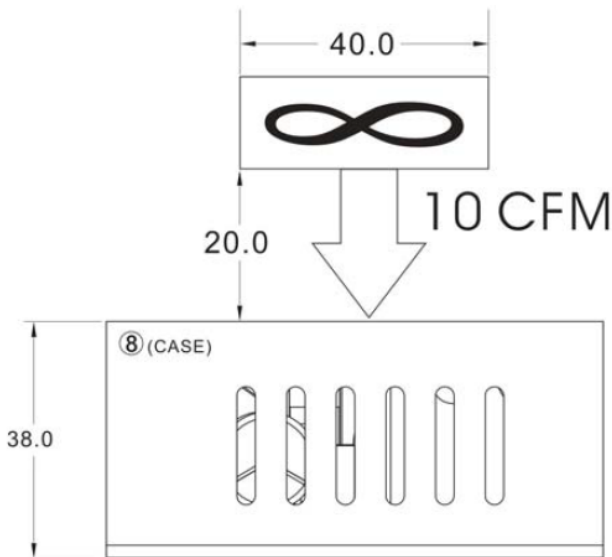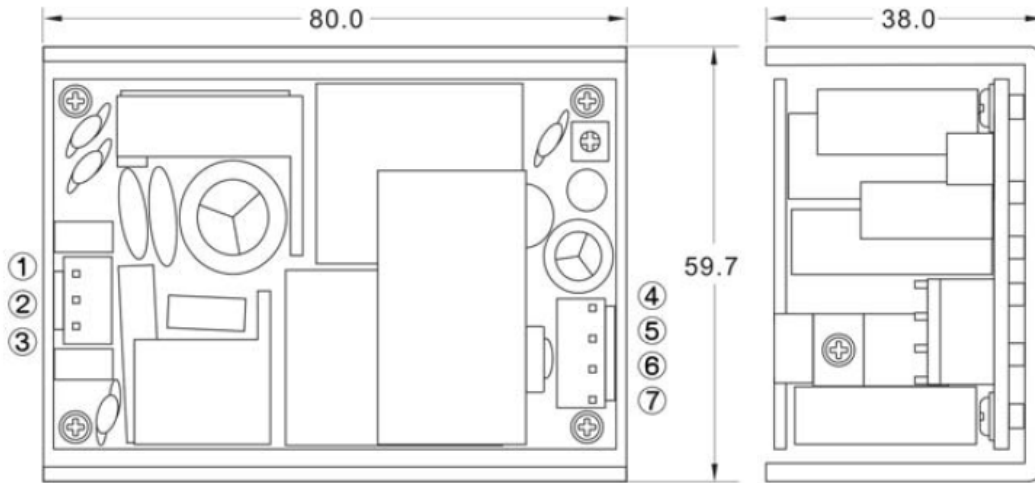

A=For fixture to din rail clip only
 B=For fixture to pcb/chassis only
 A=M3x0.5P
 B=M3x0.5P




Pin #	Function
1	AC Input (N)
2	No Pin
3	AC Input (L)
4	DC+ Output
5	DC+ Output
6	DC Return
7	DC Return
8	Protective Earth

Notes (continued from fourth page):

- 11. Do not screw more than 2.5mm deep into threads of base plate for U-Channel or Enclosed models.
- 12. Headers on all models are ALEX 9397 series. Use ALEX 9396 series mates or equivalent.



Mechanical Drawing & Pin-out (Enclosed Models)

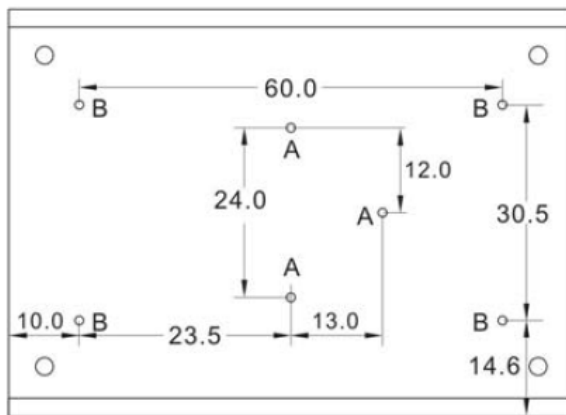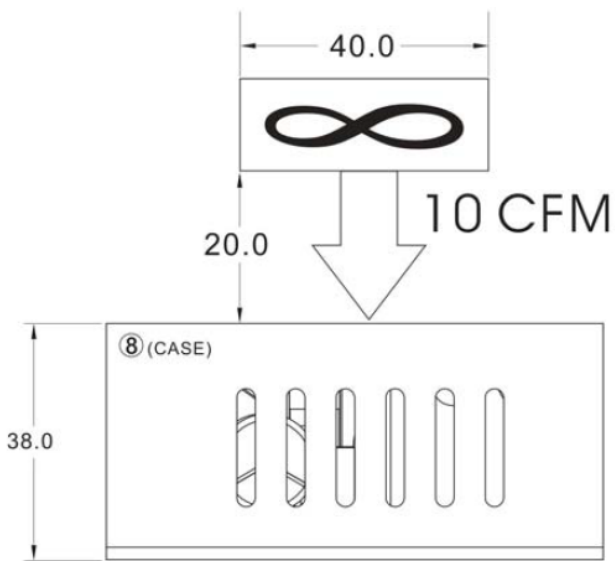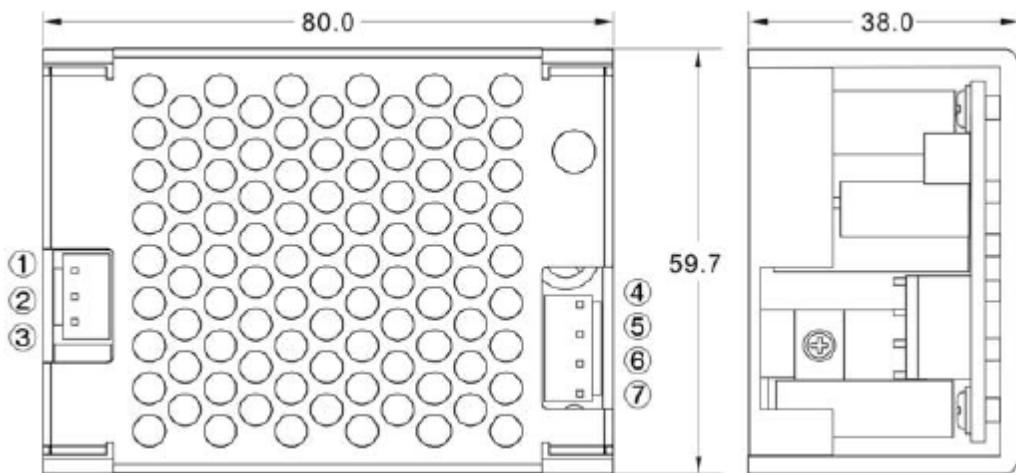

A=For fixture to din rail clip only
 B=For fixture to pcb/chassis only
 A=M3x0.5P
 B=M3x0.5P

Pin #	Function
1	AC Input (N)
2	No Pin
3	AC Input (L)
4	DC+ Output
5	DC+ Output
6	DC Return
7	DC Return
8	Protective Earth

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [Power Partners / TT Electronics](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [AAD600S-4-OP](#) [R22095](#) [HWS50A-5/RA](#) [KD0204](#) [9021](#) [S-15F-12](#) [LDIN100150](#) [LPM000-BBAR-01](#) [LPX17S-C](#)
[EVS57-10R6/R](#) [FDC40-24S12](#) [FP80](#) [FRV7000G](#) [22929](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#) [432703037161](#) [WRB01X-](#)
[U](#) [LPX140-C](#) [08-30466-1040G](#) [09-160CFG](#) [70841004](#) [70841025](#) [VPX3000-CBL-DC](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-](#)
[OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [DMB-EWG](#) [TVQF-1219-18S](#)
[6504-226-2101](#) [XPFM201A+](#) [MAP80-4000G](#) [LFP300F-24-TY](#) [SMP21-L20-DC24V-5A](#) [VI-MUL-ES](#) [08-30466-0065G](#) [CME240P-24](#) [VI-](#)
[RU031-EWWX](#) [08-30466-0028G](#) [S82Y-TS01](#) [LFP300F-24-SNTY](#)