

Three Phase AC Controller Modules


PSUT 35

$$I_{RMS} = 3 \times 35 \text{ A}$$

$$V_{RRM} = 600-1200 \text{ V}$$

Preliminary Data Sheet

V_{RSM} V_{DSM} (V)	V_{RRM} V_{DRM} (V)	Type
700	600	PSUT 35/06
900	800	PSUT 35/08
1300	1200	PSUT 35/12



Symbol	Test Conditions	Maximum Ratings
I_{RMS}	$T_C = 85^\circ\text{C}$; (per phase)	35 A
I_{TAVM}	$T_C = 85^\circ\text{C}$; 180° sine, per Thyristor	16 A
I_{TSM}	$T_{VJ} = 45^\circ\text{C}$ t = 10 ms (50 Hz), sine	200 A
	$V_R = 0$ t = 8.3 ms (60 Hz), sine	210 A
	$T_{VJ} = 125^\circ\text{C}$ t = 10 ms (50 Hz), sine	180 A
	$V_R = 0$ t = 8.3 ms (60 Hz), sine	190 A
$\int i^2 dt$	$T_{VJ} = 45^\circ\text{C}$ t = 10 ms (50 Hz), sine	200 A ² s
	$V_R = 0$ t = 8.3 ms (60 Hz), sine	180 A ² s
	$T_{VJ} = 125^\circ\text{C}$ t = 10 ms (50 Hz), sine	160 A ² s
	$V_R = 0$ t = 8.3 ms (60 Hz), sine	150 A ² s
$(di/dt)_{cr}$	$T_{VJ} = T_{VJM}$ repetitive, $I_T = 20 \text{ A}$ $f=50\text{Hz}$, $t_p=200\mu\text{s}$ $V_D=2/3V_{DRM}$	100 A/ μs
	$I_G=0.15 \text{ A}$ non repetitive, $I_T = I_{TAVM}$	500 A/ μs
	$di_G/dt=0.15\text{A}/\mu\text{s}$	
$(dv/dt)_{cr}$	$T_{VJ} = T_{VJM}$ $V_D=2/3V_{DRM}$ $R_{GK} = \infty$, method 1 (linear voltage rise)	500 V/ μs
P_{GM}	$T_{VJ} = T_{VJM}$ $t_p=30\mu\text{s}$	$\leq 5 \text{ W}$
	$I_T = I_{TAVM}$ $t_p=300\mu\text{s}$	$\leq 2.5 \text{ W}$
P_{GAVM}		0.5 W
V_{RGM}		10 V
T_{VJ}		-40... + 125 °C
T_{VJM}		125 °C
T_{stg}		-40... + 125 °C
V_{ISOL}	50/60 Hz, RMS t = 1 min	2500 V~
	$I_{ISOL} \leq 1 \text{ mA}$ t = 1 s	3000 V~
M_d	Mounting torque (M4)	1.5 - 1.8 Nm
		14 - 16 lb.in.
Weight	typ.	16 g

Features

- Thyristor controller for AC (circuit W3C acc. to IEC) for mains frequency
- Isolation voltage 3000 V~
- Planar glass passivated chips
- Low forward voltage drop
- Leads suitable for PC board soldering
- UL registered, E 148688

Applications

- Switching and control of single and three phase AC circuits
- Light and temperature control
- Softstart AC motor controller
- Solid state switches

Advantages


- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling capability
- High power density
- Small and light weight

Data according to IEC 60747 refer to a single thyristor unless otherwise stated

Symbol	Test Conditions	Characteristic Value
$I_{D,R}$	$T_{VJ} = T_{VJM}, V_R = V_{RRM}, V_D = V_{DRM}$	≤ 5 mA
V_T	$I_T = 20$ A, $T_{VJ} = 25$ °C	≤ 1.6 V
V_{TO}	For power-loss calculations only	0.85 V
r_T		27 mΩ
V_{GT}	$V_D = 6$ V, $T_{VJ} = 25$ °C	≤ 1.5 V
	$T_{VJ} = -40$ °C	≤ 2.5 V
I_{GT}	$V_D = 6$ V, $T_{VJ} = 25$ °C	≤ 25 mA
	$T_{VJ} = -40$ °C	≤ 50 mA
V_{GD}	$T_{VJ} = T_{VJM}, V_D = 2/3 V_{DRM}$	≤ 0.2 V
I_{GD}	$T_{VJ} = T_{VJM}, V_D = 2/3 V_{DRM}$	≤ 3 mA
I_L	$T_{VJ} = 25$ °C, $t_p = 10$ μs $I_G = 0.1$ A, $di_G/dt = 0.1$ A/μs	≤ 75 mA
I_H	$T_{VJ} = 25$ °C, $V_D = 6$ V, $R_{GK} = \infty$	≤ 50 mA
t_{gd}	$T_{VJ} = 25$ °C, $V_D = 1/2 V_{DRM}$ $I_G = 0.1$ A, $di_G/dt = 0.1$ A/μs	≤ 2 μs
R_{thJC}	per thyristor; DC	1.3 KW
	per module	0.22 KW
R_{thJK}	per thyristor; sine 180° el	typ. 1.8 KW
	per module	typ. 0.3 KW
d_s	Creeping distance on surface	11.2 mm
d_A	Creeping distance in air	5.0 mm
a	Max. allowable acceleration	50 m/s ²

Package style and outline

Dimensions in mm (1mm = 0.0394")

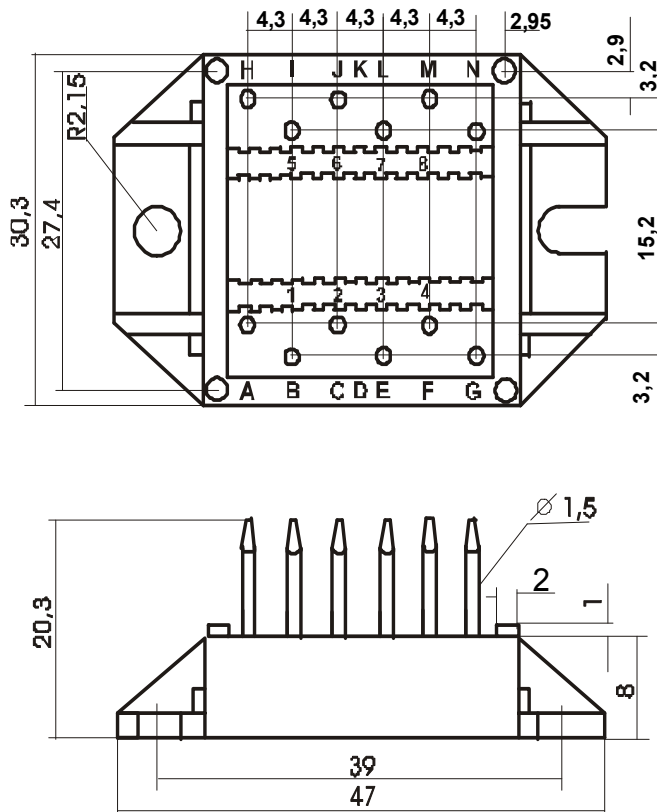

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Discrete Semiconductor Modules](#) category:

Click to view products by [Powersem](#) manufacturer:

Other Similar products are found below :

[M252511FV](#) [DD260N12K-A](#) [DD285N02K](#) [DD380N16A](#) [DD89N1600K-A](#) [APT2X21DC60J](#) [APT58M80J](#) [B522F-2-YEC](#) [MSTC90-16](#)
[ND104N16K](#) [25.163.0653.1](#) [25.163.2453.0](#) [25.163.4253.0](#) [25.190.2053.0](#) [25.194.3453.0](#) [25.320.4853.1](#) [25.320.5253.1](#) [25.326.3253.1](#)
[25.326.3553.1](#) [25.330.1653.1](#) [25.330.4753.1](#) [25.330.5253.1](#) [25.334.3253.1](#) [25.334.3353.1](#) [25.350.2053.0](#) [25.352.4753.1](#) [25.522.3253.0](#)
[T483C](#) [T484C](#) [T485F](#) [T485H](#) [T512F-YEB](#) [T513F](#) [T514F](#) [T554](#) [T612FSE](#) [25.161.3453.0](#) [25.179.2253.0](#) [25.194.3253.0](#) [25.325.1253.1](#)
[25.326.4253.1](#) [25.330.0953.1](#) [25.332.4353.1](#) [25.350.1653.0](#) [25.350.2453.0](#) [25.352.1453.0](#) [25.352.1653.0](#) [25.352.2453.0](#) [25.352.5453.1](#)
[25.522.3353.0](#)