




## **Sealed Nickel Cadmium Batteries**

## Model: PCBM-3.6


## **Specifications**


| Nominal Voltage                           |                         | 3.6 Volt        |
|---|-------------------------|-----------------|
| Nominal Voltage                           |                         | 3.6 VOIL        |
| Rated Capacity                            |                         | 110 mAh         |
| Dimensions                                | Diameter in. (mm)       | 0.57 (14.5)     |
|   | Height in. (mm)         | 2.05 (52.0)     |
|   | Height with solder tabs | 2.05 (52.0)     |
|   | Weight Approx.          | 21 gm           |
|   | Internal Resistance     | < 45 mΩ         |
|   | Standard Charge (0.1C)  | 11 mA           |
|   | Trickle Charge          | (0.03C)~(0.05C) |
|   | Fast Charge ΔV          | n/a             |
| Recommended                               | Std/Trickle Charge      | 20±5°C          |
| Operating                                 | Fast Charge             | n/a             |
| Temperature                               | Discharge               | 20±5°C          |
| Range                                     | Storage                 | -20°C to 45°C   |
| Standard Discharge (0.2C) Cut Off Voltage |                         | 1.0V per cell   |
| High Rate Discharge (1 C) Cut Off Voltage |                         | 1.0V per cell   |

#### **Dimensions**

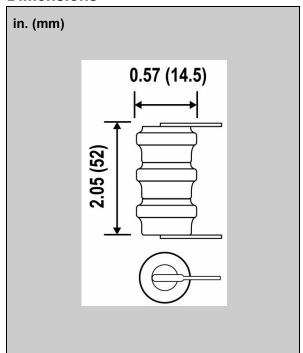

# **Charging and Discharging Characteristics**






## **Discharge**

1.7 1.6 0°C 20°C Voltage (V) 40°C 1.3 Charging: 1C x 1.2 hrs. 1.2 1.1 20 40 50 60 70 80 Time (min.)


**Standard Charge** 

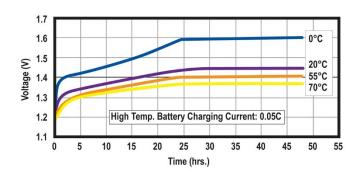


**Fast Charge** 

**Trickle Charge** 







▲ Standard Battery Cycle Life ▲




**▲** Cycle Life Using Trickle Charging **▲** 




▲ Capacity vs. Temperature ▲

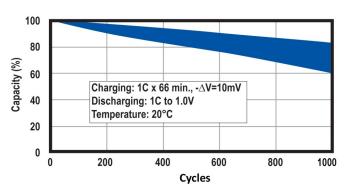

▲ Fast Charging Cycle Life ▲



▲ Stand-by Battery Life ▲



▲ Retained Capacity In Storage ▲

### **Corporate Headquarters and Domestic Sales**

Power-Sonic Corporation • 7550 Panasonic Way • San Diego, CA 92154 •U.S.A Phone: (619) 661-2020 • Fax: (619) 661.3650

Email Sales: national-sales@power-sonic.com

Email Customer Service: customer-service @power-sonic.com

E-mail Technical Support: technical-support@power-sonic.com

#### **International Sales**

Power-Sonic Corporation • P.O. Box 5242 • Redwood City, CA 94063 • U.S.A. Phone: (650) 364-5001 • Fax: (650) 366-3662
Email Sales: international-sales.com@power-sonic.com

www.power-sonic.com

© Copyright 2010 Power-Sonic Corporation. All rights reserved

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for NiCd - Nickel Cadmium Battery category:

Click to view products by Power-Sonic manufacturer:

Other Similar products are found below:

<u>PS-850AA-T PS-D-T PS-F PS-C-T PS-CX-T PS-C PS-AAX PS-850AA PS-1/2D N-700AAC 15568-1 PS-2/3AA PS-AA PS-2/3A-T PS-AAX PS-SC PS-AAX-T PS-1/2D-T PS-2/3A PS-AAA PS-D</u>