



PS-12180 12 Volt 18.0 AH


Rechargeable Sealed Lead Acid Battery

We've Got The Power.™




Terminals: (mm)

- F2 - Quick disconnect tabs, 0.250" x 0.032" - Mate with AMP. INC FASTON "250" series
- NB2: Tin plated brass post with nut & bolt connectors
- T12 - Threaded insert with 5mm stud

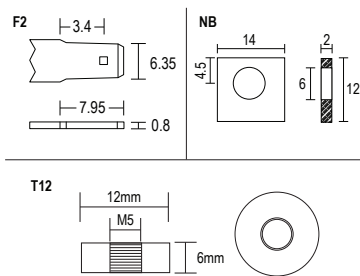

Physical Dimensions: in (mm)

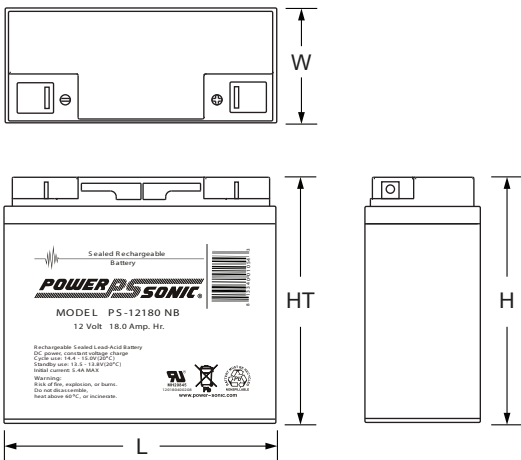

L: 7.13 (181) **W:** 3.00 (76) **H:** 6.59 (167) **HT:** 6.59 (167)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

Features

- Absorbent Glass Mat (AGM) technology for superior performance
- Valve regulated, spill proof construction allows safe operation in any position
- Power/volume ratio yielding unrivaled energy density
- Rugged impact resistant ABS case and cover (UL94-HB)
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L. recognized under file number MH 20845

Performance Specifications

Nominal Voltage 12 volts (6 cells)

Nominal Capacity

| | |
|-------------------------------------|---------|
| 20-hr. (900mA to 10.50 volts) | 18.0 AH |
| 10-hr. (1.7A to 10.50 volts) | 17.0 AH |
| 5-hr. (3.2A to 10.20 volts) | 16.0 AH |
| 1-hr. (11.1A to 9.00 volts) | 11.1 AH |
| 15-min. (34.3A to 9.00 volts) | 8.58 AH |

Approximate Weight 12.60 lbs. (5.72 kg)

Energy Density (20-hr. rate) 1.53 W-h/in³ (93.51 W-h/l)

Specific Energy (20-hr. rate) 17.14 W-h/lb (37.79 W-h/kg)

Internal Resistance (approx.) 14 milliohms

Max Discharge Current (7 Min.) 54.0 amperes

Max Short-Duration Discharge Current (10 Sec.) .. 180.0 amperes

Shelf Life (% of nominal capacity at 68°F (20°C))

| | |
|----------------|-----|
| 1 Month | 97% |
| 3 Months | 91% |
| 6 Months | 83% |


Operating Temperature Range

| | |
|-----------------|-------------------------------|
| Charge | -4°F (-20°C) to 122°F (50°C) |
| Discharge | -40°F (-40°C) to 140°F (60°C) |


Case ABS Plastic

Power-Sonic Chargers.....PSC-122000A, 124000A,
..... 122000A-C, 124000A-C


Shelf Life & Storage

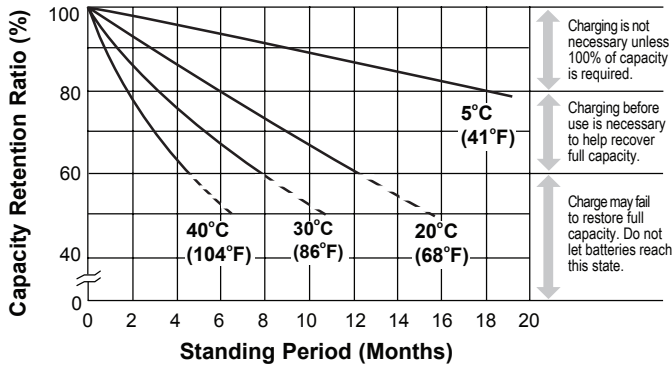


Discharge Characteristics

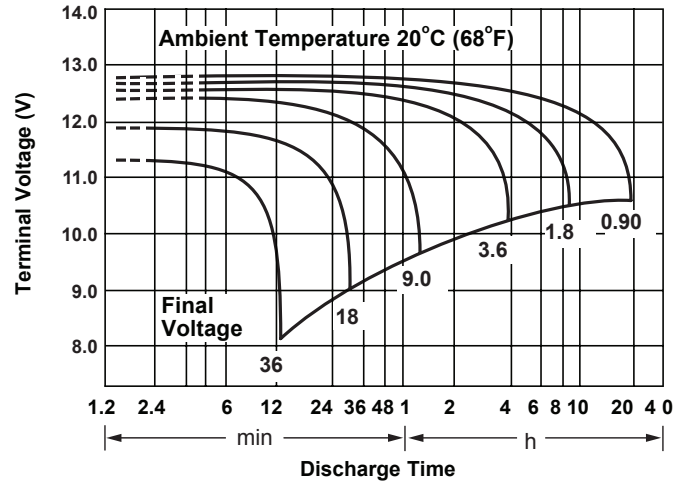


Discharge Time vs. Discharge Current

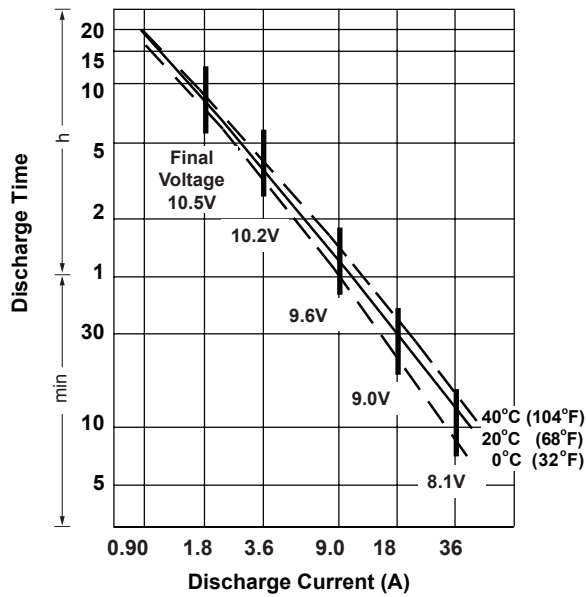

Life Characteristics in Stand-By Use

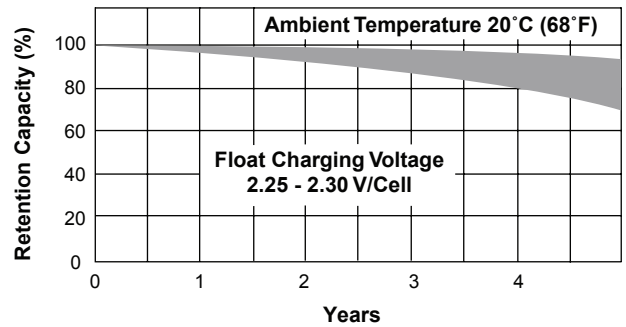

Life Characteristics in Cyclic Use

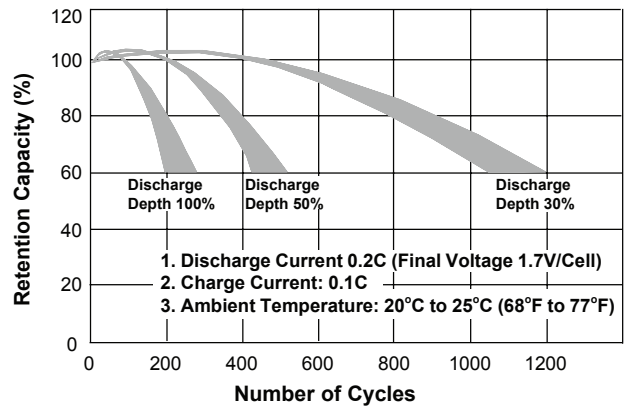

Charging

Cycle Applications: Limit initial current to 5.4A. Charge until battery voltage (under charge) reaches 14.4 to 14.7 volts at 68°F (20°C). Hold at 14.4 to 14.7 volts until current drops to under 180mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

"Float" or "Stand-By" Service: Hold battery across constant voltage source of 13.5 to 13.8 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

Note: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Chargers

Power-Sonic offers a wide range of chargers suitable for batteries up to 100AH. Please refer to the Charger Selection Guide in our specification sheets for "C-Series Switch Mode Chargers" and "Transformer Type A and F Series". Please contact our Technical department for advice if you have difficulty in locating suitable models.

Further Information

Please refer to our website www.power-sonic.com for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc..

Contact Information

| | | | |
|---|---|--|--|
| <p>DOMESTIC SALES</p> <p>Tel: +1-619-661-2020</p> <p>Fax: +1-619-661-3650</p> <p>national-sales@power-sonic.com</p> | <p>CUSTOMER SERVICE</p> <p>Tel: +1-619-661-2030</p> <p>Fax: +1-619-661-3648</p> <p>customer-service@power-sonic.com</p> | <p>TECHNICAL SUPPORT</p> <p>Tel: +1-619-661-2020</p> <p>Fax: +1-619-661-3648</p> <p>support@power-sonic.com</p> | <p>INTERNATIONAL SALES</p> <p>Tel: +1-650-364-5001</p> <p>Fax: +1-650-366-3662</p> <p>international-sales@power-sonic.com</p> |
|---|---|--|--|

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sealed Lead Acid Battery](#) category:

Click to view products by [Power-Sonic](#) manufacturer:

Other Similar products are found below :

[035021](#)