

We've Got The Power.™

Sealed Nickel Cadmium Batteries High Temperature

Model: PS-SCH

0°C

20°C

40°C

16

18

Charging: 0.1C x 15 hrs.


12

14

Specifications

| Nominal Voltage | | 1.2 Volt |
|---|-------------------------|-----------------|
| Rated Capacity | | 1500 mAh |
| Dimensions | Diameter in. (mm) | 0.87 (22.1) |
| | Height in. (mm) | 1.65 (42.0) |
| | Height with solder tabs | 1.69 (43.0) |
| | Weight Approx. | 41 gm |
| | Internal Resistance | <20 mΩ |
| | Standard Charge (0.1C) | 150mA |
| | Trickle Charge | (0.03C)~(0.05C) |
| | Fast Charge ∆V | n/a |
| Recommended | Std/Trickle Charge | 0 to 70°C |
| Operating | Fast Charge | 0 to 70°C |
| Temperature | Discharge | -20 to 70°C |
| Range | Storage | -20 to 60°C |
| Standard Discharge (0.2C) Cut Off Voltage | | 1.0V per cell |
| High Rate Discharge (1 C) Cut Off Voltage | | 1.0V per cell |

Dimensions

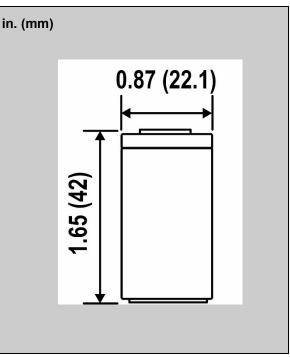

Charging and Discharging Characteristics

1.60

1.55

1.50

1.45

1.25 1.20

1.15

1.10


0

2


4

6

(A) 1.40 1.35 1.30 1.25

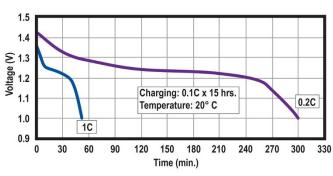



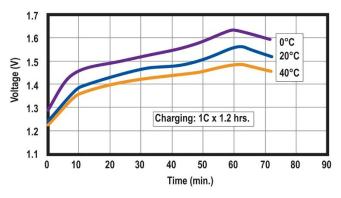


Standard Charge

Time (min.)

8

10

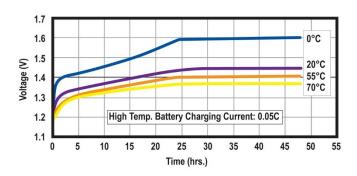


Fast Charge

Trickle Charge



Model: PS-SCH

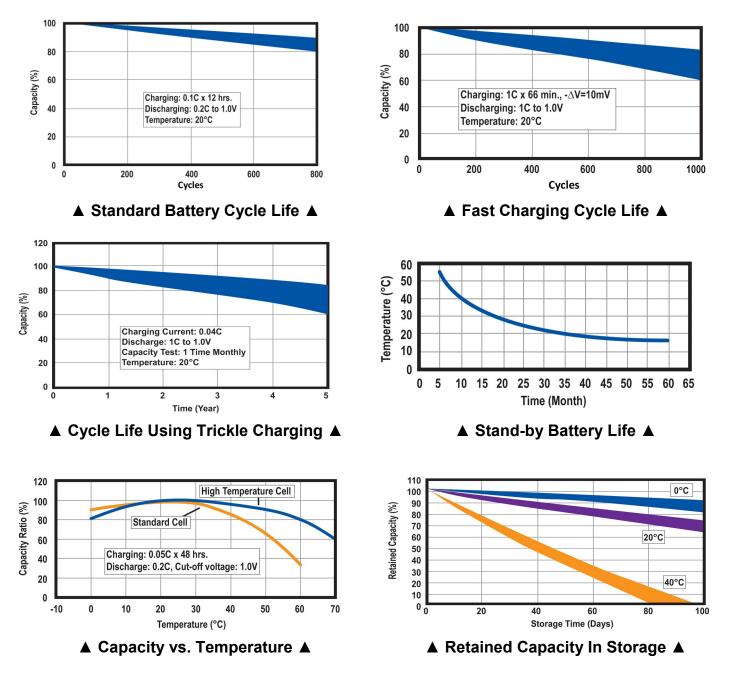

Corporate Headquarters and Domestic Sales

Power-Sonic Corporation • 7550 Panasonic Way • San Diego, CA 92154 •U.S.A Phone: (619) 661-2020 • Fax: (619) 661.3650 Email Sales: national-sales@power-sonic.com Email Customer Service: customer-service @power-sonic.com E-mail Technical Support: technical-support@power-sonic.com

International Sales

Power-Sonic Corporation • P.O. Box 5242 • Redwood City, CA 94063 • U.S.A. Phone: (650) 364-5001 • Fax: (650) 366-3662 Email Sales: international-sales.com@power-sonic.com

www.power-sonic.com

© Copyright 2010 Power-Sonic Corporation. All rights reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for NiCd - Nickel Cadmium Battery category:

Click to view products by Power-Sonic manufacturer:

Other Similar products are found below :

<u>PS-850AA-T</u> <u>PS-D-T</u> <u>PS-F</u> <u>PS-C-T</u> <u>PS-CX-T</u> <u>PS-C</u> <u>PS-AAX</u> <u>PS-850AA</u> <u>PS-1/2D</u> <u>N-700AAC</u> <u>15568-1</u> <u>PS-2/3AA</u> <u>PS-AA</u> <u>PS-2/3A-T</u> <u>PS-</u> A PS-SC PS-AAX-T PS-1/2D-T PS-2/3A PS-AAA PS-D