




preci-dip

DIL SOCKETS

SERIES
110

110-PP-632-41-001101
2.54 mm, Solder tail

Open frame standard low profile DIL Sockets

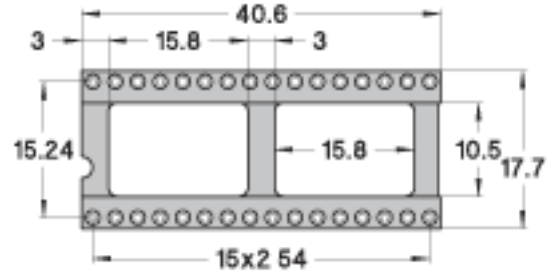

TECHNICAL SPECS.:

| | |
|----------------------------|--|
| Insulator | Black glass filled polyester PCT-GF30-FR |
| Flammability | UL 94V-O |
| Sleeve | Brass CuZn36Pb3 (C36000) |
| Contact | Clip (4 finger): Beryllium copper (C17200) |
| Accepted pin Ø | 0.40 to 0.56 mm |
| Insertion Forces | 2 N typ. |
| Withdrawal Forces | 1 N typ. (polished steel gauge Ø 0.43 mm) |
| Mechanical life | Min. 100 cycles |
| Rated current | 1 A |
| Contact resistance | Max. 10 m |
| Dielectric strength | Min. 1000 V RMS |

ORDERING INFORMATION:

| | | |
|-----------------|--------|--------------|
| PP Plating code | Sleeve | Clip |
| 87 | Tin | Gold flash |
| 83 | Tin | Gold 0.75 µm |

ADVANCED INFORMATION:

| Order Codes | Poles | A | B | C | D | E | See |
|----------------------|-------|------|------|------|---|---|-----|
| 110-PP-210-41-001101 | 10 | 12.6 | 5.08 | 7.6 | | | |
| 110-PP-304-41-001101 | 4 | 5.0 | 7.62 | 10.1 | | | |
| 110-PP-306-41-001101 | 6 | 7.6 | 7.62 | 10.1 | | | |
| 110-PP-308-41-001101 | 8 | 10.1 | 7.62 | 10.1 | | | |

| | | | | |
|----------------------|-----|------|-------|------|
| 110-PP-310-41-001101 | 10 | 12.6 | 7.62 | 10.1 |
| 110-PP-312-41-001101 | 12 | 15.2 | 7.62 | 10.1 |
| 110-PP-314-41-001101 | 14 | 17.7 | 7.62 | 10.1 |
| 110-PP-316-41-001101 | 16 | 20.3 | 7.62 | 10.1 |
| 110-PP-318-41-001101 | 18* | 22.8 | 7.62 | 10.1 |
| 110-PP-320-41-001101 | 20* | 25.3 | 7.62 | 10.1 |
| 110-PP-322-41-001101 | 22* | 27.8 | 7.62 | 10.1 |
| 110-PP-324-41-001101 | 24* | 30.4 | 7.62 | 10.1 |
| 110-PP-328-41-001101 | 28 | 35.5 | 7.62 | 10.1 |
| 110-PP-420-41-001101 | 20 | 25.4 | 10.16 | 12.6 |
| 110-PP-422-41-001101 | 22 | 27.8 | 10.16 | 12.6 |
| 110-PP-424-41-001101 | 24 | 30.4 | 10.16 | 12.6 |
| 110-PP-428-41-001101 | 28 | 35.5 | 10.16 | 12.6 |
| 110-PP-432-41-001101 | 32 | 40.6 | 10.16 | 12.6 |
| 110-PP-610-41-001101 | 10 | 12.7 | 15.24 | 17.7 |
| 110-PP-624-41-001101 | 24* | 30.5 | 15.24 | 17.7 |
| 110-PP-628-41-001101 | 28* | 35.5 | 15.24 | 17.7 |
| 110-PP-632-41-001101 | 32* | 40.6 | 15.24 | 17.7 |
| 110-PP-636-41-001101 | 36 | 45.7 | 15.24 | 17.7 |
| 110-PP-640-41-001101 | 40* | 50.8 | 15.24 | 17.7 |
| 110-PP-642-41-001101 | 42 | 53.3 | 15.24 | 17.7 |
| 110-PP-648-41-001101 | 48* | 60.9 | 15.24 | 17.7 |
| 110-PP-650-41-001101 | 50 | 63.5 | 15.24 | 17.7 |
| 110-PP-652-41-001101 | 52 | 66.0 | 15.24 | 17.7 |
| 110-PP-950-41-001101 | 50 | 63.5 | 22.86 | 25.3 |
| 110-PP-952-41-001101 | 52 | 66.0 | 22.86 | 25.3 |
| 110-PP-964-41-001101 | 64 | 81.2 | 22.86 | 25.3 |

TECHNICAL ASSISTANCE

GENERAL SPECIFICATIONS:

The values listed below are general specs applying for PRECI-DIP DIL sockets. Please see individual catalog page for additional and product specific technical data.

| | |
|-----------------------------|------------------|
| Operating temperature range | -55 ... +125 °C |
| Climatic category (IEC) | 55/125/21 |
| Operating humidity range | annual mean 75 % |
| Max working voltage | 100 VRMS/150 VDC |

PRECI-DIP sockets are recognized by Underwriters Laboratories Inc. and listed under "Connectors for Use in Data, Signal, Control and Power Applications", File Nr. E174442.

MECHANICAL CHARACTERISTICS:

| | |
|-----------------------------------|---|
| Clip retention | Min. 40 N (no displacement under axial force applied) |
| Contact (sleeve / clip) retention | Min. 3.3 N acc. to MIL-DTL-83734, pt 4.6.4.2 |

ELECTRICAL CHARACTERISTICS:

| | |
|--|--|
| Insulation resistance between any two adjacent contacts | Min. 10'000 M at 500 V AC |
| Capacitance between any two adjacent contacts | Max. 1 pF |
| Air and creepage distances between any two adjacent contacts | Min. 0.6 mm (Min. 0.2 mm FOR SHRINK-DIP SOCKETS) |

ENVIRONMENTAL CHARACTERISTICS:

The sockets withstand the following environmental tests without mechanical and electrical defects:

- Dry heat steady state IEC 60512-11-9.11i / 60068-2-2.Bb: 125 °C, 16h
- Damp heat cyclic IEC 60512-11-12.11m / 60068-2-30.Db: 25/55 °C, 90 – 100 %rH, 1 cycle of 24 h
- Cold steady state IEC 60512-11-10.11j / 60068-2-1.A: -55 °C, 2 h
- Thermal shock IEC 60512-11-4.11d / 60068-2-14.Na: -55/125 °C, 5 cycles 30 min
- Sinusoidal vibrations IEC 60512-6-4.6d / 60068-2-6.Fc: 10 to 500 Hz, 10 g, 1 octave/min, 10 cycles for each axis
- Shock IEC 60512-6-3.6c / 60068-2-27.Ea: 50 g, 11 ms, 3 shocks in three axis

During the above two tests no contact interruption >50 ns does appear.

- Solderability J-STD-002A, Test A, 245°C, 5 s solder alloy SnAg3.8Cu0.7
- Resistance to soldering heat J-STD-0020C, 260°C, 20 s
- Moisture sensitivity J-STD-020C level 1
- Resistance to corrosion :
 - 1) Salt spray test IEC 60068-2-11.Ka: 48 h
 - 2) Sulfur dioxide (SO₂) test IEC 60068-2-42 Kc: 96 h at 25 ppm SO₂, 25 °C, 75 %rH
 - 3) Hydrogen sulfide (H₂S) test IEC 60068-2-43 Kd: 96 h at 12 ppm H₂S, 25 °C, 75 %rH

SOLDERLESS COMPLIANT PRESS-FIT CHARACTERISTICS:

PRESS-FIT CHARACTERISTICS MEASURED ACC. TO IEC 60352-5

- Press-in force: 90 N max. (at min. hole dia.) / 65 N typ.
- Push-out force: 30 N min. (at max. hole dia.) / 50 N typ.
- Push-out 3rd cycle: 20 N min. (at max. hole dia.)

PCB HOLE DIMENSIONS

- 2.54 mm grid: Finished hole Ø: 1 + 0.09/-0.06 mm | Drilled hole Ø: 1.15 ± 0.02 mm

PCB HOLE PLATING

- PCB surface finish: Hole plating
- Tin: 5-15 μm tin over min. 25 μm copper
- Copper: min. 25 μm copper
- Gold over nickel: 0.05-0.2 μm gold over 2.5-5 μm nickel over min. 25 μm copper

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [IC & Component Sockets](#) category:

Click to view products by [Precidip](#) manufacturer:

Other Similar products are found below :

[0066-3-17-15-30-14-02-0](#) [670](#) [672](#) [673](#) [694-13-640-00-672-000](#) [712-93-120-41-001000](#) [714-93-104-31-018000](#) [8059-4G1-LF](#) [807-22-001-10-001101](#) [807-22-001-10-006101](#) [807-22-001-30-011101](#) [807-22-001-30-012101](#) [807-22-001-30-013101](#) [807-22-001-30-014101](#) [8-1437531-4](#) [8150-6P10](#) [833-93-034-10-001000](#) [851-41-006-10-001000](#) [851-43-008-20-001000](#) [851-43-014-20-001000](#) [851-93-006-20-001000](#) [851-93-010-20-001000](#) [853-43-020-10-001000](#) [86.010.0053.0](#) [116-43-308-41-007000](#) [PX-68LCC](#) [121-13-318-41-001000](#) [121-13-320-41-001000](#) [121-13-308-41-001000](#) [123-43-314-41-801000](#) [123-43-420-41-001000](#) [122-13-316-41-001000](#) [123-13-624-41-001000](#) [123-43-306-41-001000](#) [12-3513-11](#) [123-91-320-41-001000](#) [126-43-310-41-002000](#) [AKSUN 37V-T](#) [1437503-9](#) [1437504-1](#) [146-44-308-41-013000](#) [146-43-308-41-012000](#) [160-10-308-00-001000](#) [160-40-320-00-001000](#) [214-99-306-01-670800](#) [232-1270-02-0602](#) [2-382761-4](#) [2-5331677-4](#) [2-640360-3](#) [2801-2-00-50-00-00-07-0](#)