

[DISTRIBUTORS
REPS LOCATION](#)
[DISTRIBUTOR
INVENTORY SEARCH](#)

Search

Select a category

Search

[PRODUCTS](#)
[MARKETS](#)
[CUSTOM DESIGN](#)
[DISTRIBUTORS](#)
[ABOUT US](#)
[ASSISTANCE](#)
[CONTACT](#)

CATEGORIES

[Pin Connectors](#)

GRID

[All](#)

ROWS

[All](#)

TYPE

[All](#)

For more information or to request assistance, please contact sales@precidip.com

[« Back to search results](#)

YOUR SELECTED PRODUCT

PCB Connectors - Pin Connectors

SERIES
351

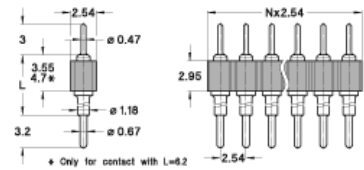
351-PP-1NN-00-003101

 Single row
2.54 mm, Straight solder tail, Pin Ø 0.47 mm

Pin connectors, solder tail.

Technical specs.:

Insulator:	Black glass filled polyester PCT-GF30-FR
Flammability:	UL 94V-O
Contact:	Brass CuZn36Pb3 (C36000)
Connecting pin Ø:	0.47 mm
Mechanical life:	Min. 500 cycles
Rated current:	3 A
Dielectric strength:	Min. 1000 V RMS


Ordering information RoHS-compliant parts

PP Plating code	Termination	Connecting pin
10	Gold 0.25 µm	Gold 0.25 µm
80	Tin	Tin

NN number of poles. Replace NN with the requested number of poles, e.g. 451-10-2NN-00-003101 for a double row version with 8 pins becomes 451-10-208-00-003101.

[General technical specs.](#)
[View CAD](#)
351-PP-1NN-00-XXX101

Straight interconnect pin connector: solder tail, single row.

Pin Ø 0.47 mm

 Availability from: 2 to 64 contacts.
Standard number of contacts 64.

351-PP-1NN-00-003101

Straight interconnect pin connector: solder tail, single row.

Pin Ø 0.47 mm

 Availability from: 2 to 64 contacts.
Standard number of contacts 64.

L = 6.2 mm

351-PP-1NN-00-004101

Straight interconnect pin connector: solder tail, single row.

Pin Ø 0.47 mm

 Availability from: 2 to 64 contacts.
Standard number of contacts 64.

L = 8.4 mm

351-PP-1NN-00-005101

Straight interconnect pin connector: solder tail, single row.

Pin Ø 0.47 mm

Availability from: 2 to 64 contacts.
Standard number of contacts 64.

L = 15.3 mm

351-PP-1NN-00-016101

Straight interconnect pin connector: solder tail, single row.

Pin Ø 0.47 mm

Availability from: 2 to 64 contacts.
Standard number of contacts 64.

L = 21.2 mm

351-PP-1NN-00-017101

Straight interconnect pin connector: solder tail, single row.

Pin Ø 0.47 mm

Availability from: 2 to 64 contacts.
Standard number of contacts 64.

L = 27.4 mm

CAD CATALOG

Literature
Catalog
CAD catalog

ABOUT PRECI-DIP

Career
Contact
Events

OTHER INFO

Feedback
Legal disclaimer
Cross references

NEWSLETTER

Stay informed!

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Precidip](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)