

Product

MCT FRAME



MCT FRAME is a crimping tool frame for mobile tool die sets. Easily interchangeable crimp dies are kept together with a special pin to simplify handling. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the frame without dies.

TECHNICAL DATA

Length: 234 mm/9.21"


Width: 31 mm/1.22"

Height: 64 mm/2.52"

Weight: 460 gr/1.23 lb

Description: Tool frame for mobile die sets.

Life span, cycles: 20,000

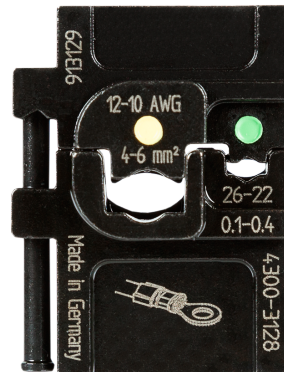


Mobile die set/4300-3128/AAA


Mobile die set for insulated connectors, 0.1-6 mm²/AWG 26-10 (green, yellow). This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 18 mm/0.71"

Height: 39 mm/1.54"

Weight: 66 gr/0.15 lb

Wire size: 0.1-6 mm² / AWG 26-10

Crimp dimensions mm/mm²:

0.1 - 0.4 mm²/4 - 6 mm²

Crimp dimensions inch/AWG:


AWG 26 - AWG 22/AWG 12 - AWG 10

Connector: Insulated connectors

Description: For pre insulated green and yellow connectors.


Life span, cycles: 20,000

Following dies are also available:

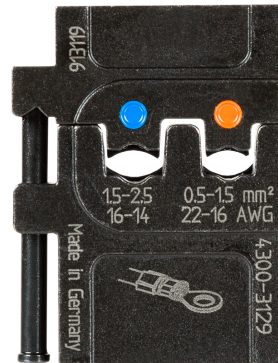


Mobile die set/4300-3129/AAA

Mobile die set for insulated connectors, 0.5-2.5 mm²/AWG 22-14 (red, blue). This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.



Die profile



Crimp profile

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 9.5 mm/0.37"

Height: 39 mm/1.54"

Weight: 75 gr/0.17 lb

Wire size: 0.5-2.5 mm² / AWG 22-14

Crimp dimensions mm/mm²:

0.5 - 1.5 mm²/1.5 - 2.5 mm²

Crimp dimensions inch/AWG:


AWG 22 - AWG 16/AWG 16 - AWG 14

Connector: Insulated connectors

Description: For pre insulated red and blue connectors.

Life span, cycles: 20,000

Following dies are also available:

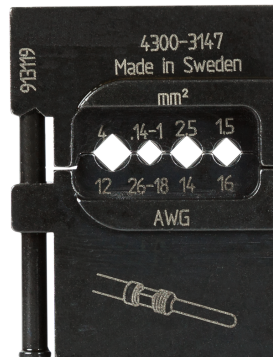


Mobile die set/4300-3147/AAA


Mobile die set for Turned pin connectors, 0.14-4 mm²/AWG 26-12. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 10 mm/0.39"

Height: 39 mm/1.54"

Weight: 72 gr/0.16 lb

Wire size: 0.14-4 mm² / AWG 26-12

Crimp dimensions mm/mm²:
0.14 - 1.0 mm²/1.5 mm²/2.5 mm²/4 mm²


Crimp dimensions inch/AWG:
AWG 26 - AWG 18/AWG 16/AWG 14/AWG 12

Connector: Turned pin connectors

Description: For turned pin connectors.

Life span, cycles: 20,000

Following dies are also available:

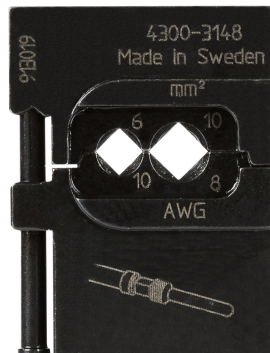


Mobile die set/4300-3148/AAA


Mobile die set for Turned pin connectors 6-10 mm²/AWG 10-8. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 10 mm/0.39"

Height: 39 mm/1.54"

Weight: 66 gr/0.15 lb

Wire size: 6-10 mm² / AWG 10-8

Crimp dimensions mm/mm²:

6 mm²/10 mm²

Crimp dimensions inch/AWG:

AWG 10/AWG 8

Connector: Turned pin connectors

Description: For turned pin connectors.

Life span, cycles: 20,000

Following dies are also available:




Mobile die set/4300-3139/AAA


Mobile die set for non insulated connectors 4-10 mm²/AWG 12-8. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 32 mm/1.26"

Width: 10 mm/0.39"

Height: 39 mm/1.54"

Weight: 60 gr/0.13 lb

Wire size: 4-10 mm² / AWG 12-8


Crimp dimensions mm/mm²:
4 mm²/6 mm²/10 mm²

Crimp dimensions inch/AWG:
AWG 12/AWG 10/AWG 8

Connector: Uninsulated connectors
Description: For uninsulated copper tube and copper sheet connectors.

Life span, cycles: 20,000

Following dies are also available:

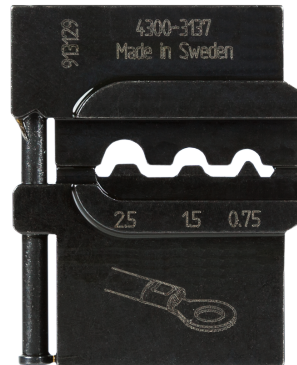


Mobile die set/4300-3137/AAA


Mobile die set for non insulated connectors 0.50-2.5 mm²/AWG 22-14. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 31 mm/1.22"

Width: 8 mm/0.31"

Height: 39 mm/1.54"

Weight: 68 gr/0.15 lb

Wire size: 0.5-2.5 mm² / AWG 22-14

Crimp dimensions mm/mm²:

0.50 - 0.75 mm²/1.5 mm²/2.5 mm²

Crimp dimensions inch/AWG:


AWG 22 - AWG 20/AWG 16/AWG 14

Connector: Uninsulated connectors

Description: For uninsulated copper tube and copper sheet connectors.

Life span, cycles: 20,000

Following dies are also available:

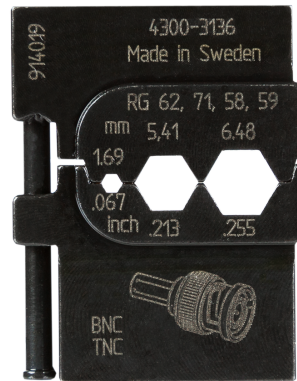


Mobile die set/4300-3136/AAA


Mobile die set for coaxial connectors RG 58, 59, 62, 71 BNC/TNC. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 30 mm/1.18"

Width: 10 mm/0.39"

Height: 39 mm/1.54"

Weight: 72 gr/0.16 lb

Crimp dimensions mm/mm²:

1,69 mm HEX/5,41 mm HEX/6,48 mm HEX

Crimp dimensions inch/AWG:

0.067\0.213\0.255\

Connector: Coaxial connector

Description: For example BNC, TNC connectors on RG 58, 59, 62, 71.

Life span, cycles: 20,000

Cables: RG108A/U, RG142B/U, RG210/U, RG223/U, RG302/U, RG58C/U, RG59B/U, RG62A/U, RG62B/U, RG71B/U

Following dies are also available:




Mobile die set/4300-3142/AAA


Mobile die set for non insulated connectors 0.5-6 mm²/AWG 22-10. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 8 mm/0.31"

Height: 39 mm/1.54"

Weight: 67 gr/0.15 lb

Wire size: 0.5-6 mm² / AWG 22-10

Crimp dimensions mm/mm²:

0.5 - 2.5 mm²/4 - 6 mm²

Crimp dimensions inch/AWG:


AWG 22 - AWG 14/AWG 12 - AWG 10

Connector: Uninsulated connectors

Description: For uninsulated copper tube and copper sheet connectors.

Life span, cycles: 20,000

Following dies are also available:

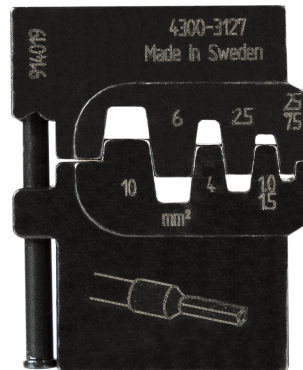


Mobile die set/4300-3127/AAA

Mobile die set for endsleeves 0.25-10 mm²/AWG 24-8. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.

Following dies are also available:



Die profile



Crimp profile

TECHNICAL DATA

Length: 31 mm/1.22"

Width: 12 mm/0.47"

Height: 39 mm/1.54"

Weight: 86 gr/0.19 lb

Wire size: 0.25-10 mm² / AWG 24-8

Crimp dimensions mm/mm²:

0.25 - 0.75 mm²/1.0 - 1.5 mm²/2.5 mm²/4 mm²/6 mm²/10 mm²


Crimp dimensions inch/AWG:

AWG 24 - AWG 20/AWG 18 - AWG 16/AWG 14/AWG 12/AWG 10/AWG 8

Connector: Endsleeves

Description: For endsleeve connectors, both uninsulated and insulated.

Life span, cycles: 20,000

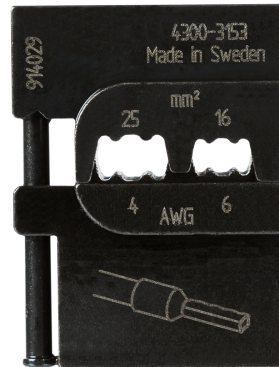


Mobile die set/4300-3153/AAA

Mobile die set for endsleeves 16-25 mm²/AWG 6-4. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.


- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.

Following dies are also available:



Die profile



Crimp profile

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 14.5 mm/0.57"

Height: 39 mm/1.54"

Weight: 87 gr/0.19 lb

Wire size: 16-25 mm² / AWG 6-4

Crimp dimensions mm/mm²:

16 mm²/25 mm²


Crimp dimensions inch/AWG:

AWG 6/AWG 4

Connector: Endsleeves

Description: For endsleeve connectors, both uninsulated and insulated.

Life span, cycles: 20,000




Mobile die set/4300-3154/AAA

Mobile die set for endsleeves 35-50 mm²/AWG 2-0. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.


- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.

Following dies are also available:



Die profile



Crimp profile

TECHNICAL DATA

Length: 34 mm/1.34"

Width: 18 mm/0.71"

Height: 39 mm/1.54"

Weight: 86 gr/0.19 lb

Wire size: 35-50 mm² / AWG 2-0


Crimp dimensions mm/mm²:
35 mm²/50 mm²

Crimp dimensions inch/AWG:
AWG 2/AWG 0

Connector: Endsleeves

Description: For endsleve connectors, both uninsulated and insulated.

Life span, cycles: 20,000




Mobile die set/4300-3150/AAA

Mobile die set for non insulated open barrel connectors 0.1-1 mm²/AWG 26-18. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 6 mm/0.24"

Height: 39 mm/1.54"

Weight: 72 gr/0.16 lb

Wire size: 0.1-1 mm² / AWG 26-18

Crimp dimensions mm/mm²:

0.1 - 0.25 mm²/0.25 - 0.5 mm²/0.5 - 1.0 mm²

Crimp dimensions inch/AWG:

AWG 26 - AWG 24/AWG 24 - AWG


22/AWG 22 - AWG 18

Connector: Uninsulated open barrel connectors

Description: For non insulated open barrel connectors.

Life span, cycles: 20,000

Following dies are also available:




Mobile die set/4300-3151/AAA

Mobile die set for non insulated open barrel connectors 0.5-2.5 mm²/AWG 22-14. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 7 mm/0.28"

Height: 39 mm/1.54"

Weight: 63 gr/0.14 lb

Wire size: 0.5-2.5 mm² / AWG 22-14

Crimp dimensions mm/mm²:

0.5 - 1.0 mm²/1.5 - 2.5 mm²

Crimp dimensions inch/AWG:


AWG 22 - AWG 16/AWG 16 - AWG 14

Connector: Uninsulated open barrel connectors

Description: For non insulated open barrel connectors.

Life span, cycles: 20,000

Following dies are also available:

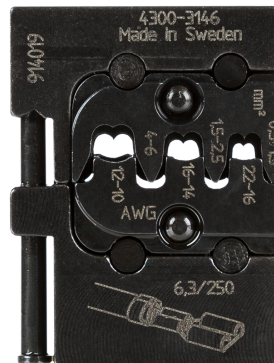


Mobile die set/4300-3146/AAA

Mobile die set for non insulated open barrel connectors 0.5-6 mm²/AWG 22-10. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 10 mm/0.39"

Height: 39 mm/1.54"

Weight: 74 gr/0.16 lb

Wire size: 0.5-6 mm² / AWG 22-10

Crimp dimensions mm/mm²:

0.5 - 1.5 mm²/1.5 - 2.5 mm²/4 - 6 mm²

Crimp dimensions inch/AWG:

AWG 22 - AWG 16/AWG 16 - AWG


14/AWG 12 - AWG 10

Connector: Uninsulated open barrel connectors

Description: For non insulated open barrel connectors 6.3 mm/.250\.


Life span, cycles: 20,000

Following dies are also available:




Mobile die set/4300-3141/AAA

Mobile die set for coaxial-/Fiberoptic: ST, SC, SMA, SMB, SFR. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.



Die profile




Crimp profile

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

TECHNICAL DATA


Length: 34 mm/1.34"
Width: 10 mm/0.39"
Height: 39 mm/1.54"
Weight: 76 gr/0.17 lb
Crimp dimensions mm/mm²:
 3.25 mm HEX/3.84 mm HEX/4.52 mm
 HEX/5.41 mm HEX
Crimp dimensions inch/AWG:
 0.128\0.151\0.178\0.213\1
Connector: Fiberoptic
Description: For example ST, SC,
 SMA, SMB, SFR.
Life span, cycles: 20,000

The part number is a reference to the die set without frame.

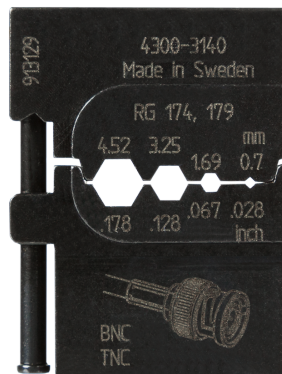


Mobile die set/4300-3140/AAA

Mobile die set for coaxial connectors: RG 174, RG 179/BNC/TNC. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.



Die profile



Crimp profile

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 10 mm/0.39"

Height: 39 mm/1.54"

Weight: 73 gr/0.16 lb

Crimp dimensions mm/mm²:

0.7 mm Sqr./1.69 mm HEX/3.25 mm

HEX/4.52 mm HEX

Crimp dimensions inch/AWG:

0.028"/0.067"/0.128"/0.178"/

0.028"/0.067"/0.128"/0.178"/

Connector: Coaxial connector

Description: For example BNC,

TNC connectors on RG 174, RG 179.

Life span, cycles: 20,000


Cables: RG122/U, RG174A/U,

RG179B/U, RG180B/U, RG187A/U,

RG188A/U, RG279/U, RG303/U,


RG316/U

Following dies are also available:




Mobile die set/4300-3138/AAA

Mobile die set for coaxial connectors: CATV RG 6.59. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.



Die profile



Crimp profile

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.

Following dies are also available:

TECHNICAL DATA

Length: 34 mm/1.34"

Width: 10 mm/0.39"

Height: 39 mm/1.54"

Weight: 79 gr/0.17 lb

Crimp dimensions mm/mm²:

8.23 mm HEX/9.14 mm HEX

Crimp dimensions inch/AWG:


0.324\W/0.360\W

Connector: Coaxial connector

Description: For example CATV connectors on RG 6.59.

Life span, cycles: 20,000

Cables: 1695, RG 6, RG143A/U, RG212/U, RG222/U, RG6 Quad, RG6A/U, TWINAX




Mobile die set/4300-3144/AAA

Mobile die set for RJ45 connectors 8/8, 8/6, 8/4. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.

Following dies are also available:



Die profile

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 17 mm/0.67"

Height: 39 mm/1.54"

Weight: 42 gr/0.09 lb

Crimp dimensions mm/mm²:

RJ 45

Crimp dimensions inch/AWG:

RJ 45

Connector: Modular plug

Description: 8/8, 8/6, 8/4

Life span, cycles: 20,000




Mobile die set/4300-3132/AAA

Mobile die set for RJ11 connectors 6/6, 6/4. This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.

Following dies are also available:



Die profile

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 14 mm/0.55"

Height: 39 mm/1.54"

Weight: 60 gr/0.13 lb

Crimp dimensions mm/mm²:

RJ 11


Crimp dimensions inch/AWG:

RJ 11

Connector: Modular plug

Description: 6/6, 6/4

Life span, cycles: 20,000

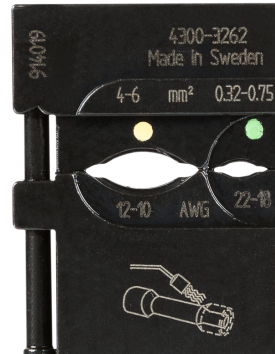


Mobile die set/4300-3262/AAA


Mobile die set for insulated heat shrink butt splice connectors, 0.32-6 mm²/AWG 22-10 (green, yellow). This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap.

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 10 mm/0.39"

Height: 39 mm/1.54"

Weight: 65 gr/0.14 lb

Wire size: 0.32-6 mm² / AWG 22-10

Crimp dimensions mm/mm²:

0.32 - 0.75 mm²/4 - 6 mm²

Crimp dimensions inch/AWG:

AWG 22 - AWG 18/AWG 12 - AWG 10

Connector: Heatshrink

Description: For pre insulated

green, yellow heat shrink connectors.

Life span, cycles: 20,000

Following dies are also available:




Mobile die set/4300-3258/AAA


Mobile die set for insulated heat shrink butt splice connectors, 0.5-2.5 mm²/AWG 22-14 (red, blue). This is one of the interchangeable crimp die sets for the MCT frame. A wide range of crimp dies enables the user to cover all applications in just one tool frame.

- Reliable – crimping performance is consistent and accurate with a parallel action stroke.
- Easy to use – designed to give the user full visibility of the crimping process. Handles are shaped for low effort crimping with a one or two hand grip.
- Versatile – an easy-access release function allows fast and simple exchange of crimp dies. No special tools needed.
- Weight and size of the tool are optimized to make it easy to carry. Dies are kept in pairs and delivered in a modular reusable box.
- Comfortable – the entire tool frame is covered in smooth plastic for comfortable use, also for outdoor operations in all weather conditions
- Hole in handle allows attachment of safety strap

The part number is a reference to the die set without frame.



Die profile



Crimp profile

TECHNICAL DATA

Length: 29 mm/1.14"

Width: 10 mm/0.39"

Height: 39 mm/1.54"

Weight: 66 gr/0.15 lb

Wire size: 0.5-2.5 mm² / AWG 22-14

Crimp dimensions mm/mm²:

0.5 - 1.5 mm²/1.5 - 2.5 mm²

Crimp dimensions inch/AWG:

AWG 22 - AWG 16/AWG 16 - AWG 14

Connector: Heatshrink

Description: For pre insulated red, blue heat shrink connectors.

Life span, cycles: 20,000

Following dies are also available:

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crimpers / Crimping Tools](#) category:

Click to view products by [Pressmaster](#) manufacturer:

Other Similar products are found below :

[010-0096](#) [M225201-06](#) [M225202-37](#) [6-1579015-5](#) [CT150-2-D02](#) [CT150-6-RH07](#) [622-6441LF](#) [M322](#) [6-304052-1](#) [63456-0054](#) [63484-3701](#)
[63800-8355](#) [63819-1875](#) [63819-2875](#) [63819-4475](#) [63823-3475](#) [63827-5375](#) [64001-0975](#) [64001-4175](#) [64005-0175](#) [662903-2](#) [690602-6](#) [7-](#)
[1579001-9](#) [7-23471-1](#) [762637-1](#) [808714-1](#) [811242-5](#) [91362-1](#) [999-50-020083](#) [1-21002-3](#) [1-21002-7](#) [12085270](#) [1-21002-6](#) [1-21113-6](#) [1-](#)
[22548-4](#) [125442-1](#) [DCE.91.073.BVC](#) [DCE.91.090.3MVM](#) [DCE.91.130.5MVU](#) [DCE.91.202.BVCM](#) [1338300-1](#) [1-354003-0](#) [1338301-1](#)
[DF62/RE-MD](#) [142321](#) [AP105-DF11-2428S\(64\)](#) [1456088-1](#) [1490794-1](#) [1-45804-6](#) [1490357-2](#)