



Schottky Barrier Diode

Feature

- Ultra Small mold type. SOD-923
- Low I_R
- > High reliability.



Applications

Low current rectification

Construction

Silicon epitaxial planar

Mechanical Characteristics

- Lead finish:100% matte Sn(Tin)
- Mounting position: Any
- ➤ Qualified max reflow temperature:260 °C
- Device meets MSL 1 requirements
- ➤ Pure tin plating: 7 ~ 17 um
- Pin flatness:≤3mil

Electrical characteristics per line@25℃

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Forward voltage	V _F	-	-	0.35	V	I _F =10mA
Reverse current	I _R	-	-	10	μΑ	V _R =10V

Absolute maximum rating@25℃

Parameter	Symbol	limits	Unit
Reverse voltage (DC)	V_{RM}	30	V
Average rectified forward current	Io	100	mA
Forward current surge peak (60Hz 1cyc)	I _{FSM}	500	mA
Operating Junction temperature Range	Tj	-55 to 125	°C
Storage temperature	T_{stg}	-40 to +125	°C

Typical Characteristics

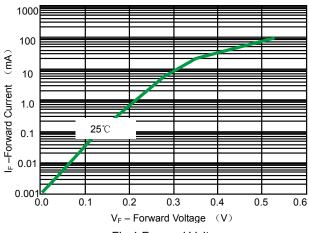


Fig 1.Forward Voltage

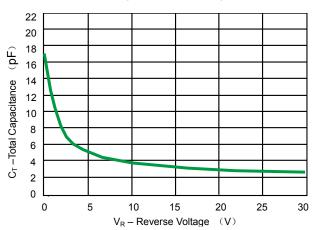


Fig 3.Total Capacitance


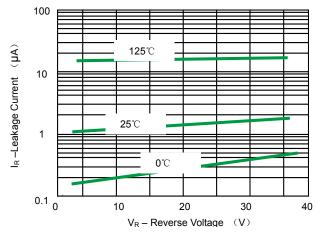



Fig 2.Leakage Current

Solder Reflow Recommendation

Peak Temp=257℃, Ramp Rate=0.802deg. ℃/sec

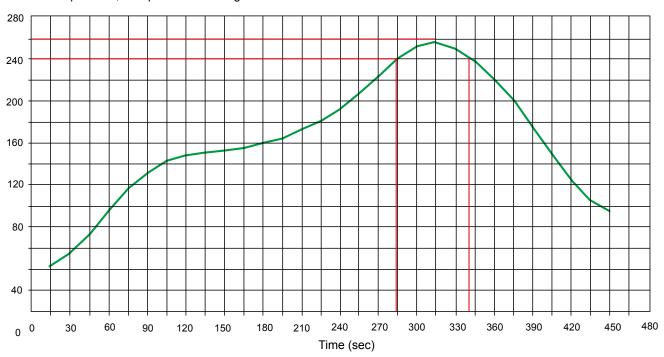


Product dimension (SOD-923)





Dim	Inc	hes	Millimeters		
Dim	MIN	MAX	MIN	MAX	
Α	0.030	0.033	0.75	0.85	
В	0.022	0.026	0.55	0.65	
С	0.037	0.041	0.95	1.05	
D	0.014	0.017	0.36	0.43	
E	0.006	0.010	0.15	0.25	
F	0.002	0.006	0.05	0.15	
Н	0.003	0.007	0.07	0.17	

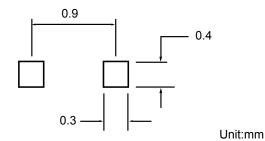

Schottky Barrier Diode

PSBD9D30V01

Ordering information

Device	Package	Shipping	
PSBD9D30V01	SOD-923 (Pb-Free)	8000 / Tape & Reel	

IMPORTANT NOTICE

and Prisemi are registered trademarks of Prisemi Electronics Co., Ltd (Prisemi), Prisemi reserves the right to make changes without further notice to any products herein. Prisemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Prisemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in Prisemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Prisemi does not convey any license under its patent rights nor the rights of others. The products listed in this document are designed to be used with ordinary electronic equipment or devices, Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Website: http://www.prisemi.com
For additional information, please contact your local Sales Representative.

©Copyright 2009, Prisemi Electronics

Prisemi is a registered trademark of Prisemi Electronics.

All rights are reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by Prisemi manufacturer:

Other Similar products are found below:

MA4E2039 MA4E2508M-1112 MBR10100CT-BP MBR1545CT MMBD301M3T5G GS1JE-TP RB160M-50TR BAS 3010S-02LRH E6327
BAT 54-02LRH E6327 NSR05F40QNXT5G NSVR05F40NXT5G NTE555 JANS1N6640 SB07-03C-TB-H SB1003M3-TL-W
SBAT54CWT1G SBM30-03-TR-E SK310-T SK33A-TP SK34B-TP SS3003CH-TL-E PDS3100Q-7 GA01SHT18 CRS10I30A(TE85L,QM MA4E2501L-1290 MBRB30H30CT-1G BAS 70-02L E6327 DMJ3940-000 SB007-03C-TB-E SB10015M-TL-E SB1003M3-TL-E SK32A-TP SK33B-TP SK35A-TP SK38B-TP NRVBM120LT1G NTE505 NTSB30U100CT-1G VS-6CWQ10FNHM3
CRG04(T5L,TEMQ) ACDBA1100LR-HF ACDBA1200-HF ACDBA140-HF ACDBA2100-HF ACDBA240-HF ACDBA3100-HF
CDBQC0530L-HF BAT54-13-F ACDBA340-HF