



• Forged • Chromium-plated • Satin • Meet the dimension-related requirements of German DIN 3113 standard ullet The maximum torque is 60% higher than in German DIN 899 and in US ANSI standard

Code	Size (mm)	L	В	D	T1	T2		
		(mm)	(mm)	(mm)	(mm)	(mm)		
35606	6	109	14.5	10.2	3.5	5.3	Х	15/90
35607	7	110	16.3	11.2	3.6	5.3	Х	15/90
35608	8	120	18.7	12.7	4.0	5.8	Х	15/90
35609	9	130	20.8	14.0	4.1	6.6	Χ	15/90
35610	10	140	22.7	15.1	4.6	7.0	Х	15/90
35611	11	159	24.7	16.7	5.0	7.5	Χ	15/90
35612	12	160	27.2	17.9	5.1	8.1	Х	15/90
35613	13	170	28.8	19.7	5.8	8.7	Χ	15/90
35614	14	180	31.4	20.6	6.0	9.0	Х	15/90
35615	15	199	33.3	22.2	6.4	9.3	Χ	15/90
35616	16	200	35.1	23.7	6.6	10.0	Х	15/60
35617	17	210	37.6	24.9	6.8	11.0	Х	15/60
35618	18	220	39.6	26.5	7.6	11.5	Х	15/60
35619	19	230	41.4	27.9	7.8	12.2	Х	15/60
35620	20	240	44.2	29.7	8.1	12.5	Х	15/60
35621	21	250	46.2	30.7	8.4	12.8	Х	10/40
35622	22	260	48.3	32.1	8.8	13.2	Х	10/40
35623	23	270	49.9	33.5	9.0	13.5	Χ	10/40
35624	24	280	51.5	34.2	9.4	13.5	Х	10/40
35625	25	290	54.7	36.7	9.6	14.3	Χ	10/40
35626	26	300	56.4	37.2	9.8	15.0	Х	10/40
35627	27	310	58.8	39.5	10.2	16.5	Χ	10/40
35628	28	320	59.5	40.6	10.6	17.0	Х	10/40
35629	29	339	61.0	41.6	10.8	17.5	Χ	5/20
35630	30	340	63.1	43.2	11.1	18.5	Х	5/20
35632	32	360	67.4	44.7	11.6	19.5	Χ	5/20
35634	34	470	69.8	48.7	12.6	19.5	Х	2/8
35636	36	510	73.8	52.7	13.6	20.5	Х	2/8
35638	38	439	73.8	52.7	13.6	20.5	Х	2/8
35641	41	550	83.8	60.7	15.6	21.5	Х	3/6
35646	46	549	93.5	69.5	17.2	22.5	Х	3/6
35650	50	549	98.8	73.7	17.5	22.5	Χ	3/6

#### **COMBINATION SPANNER SETS**

• НАБОРЫ КОМБИНИРОВАННЫХ ГАЕЧНЫХ РОЖКОВЫХ КЛЮЧЕЙ

MAULRINGSCHLÜSSELSÄTZE



















• 12 pcs.: 6, 8, 9, 10, 12, 13, 14, 15, 17, 18, 19, 22 mm • 24 pcs.: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 26, 27, 28, 30, 32 mm


Code	Quantity (pcs)	Range (mm)	ВОХ	8
35662	12	6 - 22	Х	10
35664	24	6 - 32	Х	8

## 3 DOUBLE OPEN END SPANNERS

• КЛЮЧИ ГАЕЧНЫЕ РОЖКОВЫЕ • MAULSCHLÜSSEL

















• Forged • Chromium-plated • Satin • Meet the dimension-related requirements of German DIN 3110 standard • The maximum torque is 60% higher than in German DIN 899 and in US ANSI standard

Code	Size	L	В1	B2	Т		8
Codo	(mm)	(mm)	(mm)	(mm)	(mm)		
34006	6 x 7	123	14.2	17.4	3.4	Х	10/60
34008	8 x 9	140	18.1	21.3	3.7	Х	10/60
34009	8 x 10	145	18.1	21.3	4.2	X	10/60
34010	10 x 11	156	22.1	25.6	4.7	Χ	10/60
34012	12 x 13	172	27.6	30.1	5.2	Х	10/60
34013	10 x 13	174	26.5	30.1	5.2	Х	10/60
34014	14 x 15	190	31.6	33.6	5.7	Х	10/60
34016	16 x 17	204	36.1	38.1	6.2	Χ	10/40
34019	17 x 19	223	40.1	42.1	6.7	Х	10/40
34018	18 x 19	221	40.1	42.1	6.8	Χ	10/40
34022	19 x 22	236	44.1	48.1	7.5	Х	10/40
34020	20 x 22	237	44.1	48.1	7.5	Χ	10/40
34021	21 x 23	246	44.1	50.1	7.7	Х	10/40
34024	24 x 27	263	53.1	57.6	8.4	Χ	10/40
34025	25 x 28	267	53.1	57.6	8.4	Х	10/40
34027	27 x 32	294	62.1	68.1	9.4	Χ	10/40
34030	30 x 32	294	64.1	68.1	9.4	Х	10/40

# **DOUBLE OPEN END SPANNER SETS**

• НАБОРЫ ГАЕЧНЫХ РОЖКОВЫХ КЛЮЧЕЙ • MAULSCHLÜSSELSÄTZE









- Forged Chromium-plated
- Satin Meet the dimension-related requirements of German DIN 3110 standard • The maximum torque is 60% higher than in German DIN 899 and in US ANSI standard • 6 pcs.: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17 mm
- 8 pcs.: 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22 mm











Code	Quantity (pcs)	Range (mm)	вох	8
34036	6	6x7 - 16x17	Х	30
34038	8	6x7 - 20x22	X	20



• Forged • Chromium-plated • Satin • Heads of the same size tilted 75° and 15° and a short, thin handle enable to work in places difficult to reach

Code	Size (mm)	L (mm)	D (mm)	T (mm)		8
34054	4	70	10.0	2.4	Χ	20/200
34055	5	75	13.0	2.4	Х	20/200
34056	6	80	15.0	2.7	Х	20/200
34057	7	80	15.0	2.7	Х	20/200
34058	8	90	18.5	3.0	Х	20/200
34059	9	90	18.5	3.0	Х	20/200
34060	10	100	22.0	3.0	Х	20/200
34061	11	100	22.0	3.0	Х	20/200
34062	12	120	27.0	3.5	Х	20/200
34063	13	120	27.0	3.5	Х	20/200
34064	14	120	27.0	3.5	Х	20/100
34065	15	139.4	32.5	4.8	Х	20/100
34066	16	139.4	32.5	4.8	Х	10/100
34067	17	139.4	32.5	4.8	Χ	10/100

## 2 STRAIGHT RING SPANNERS

• КЛЮЧИ НАКИДНЫЕ ПРЯМЫЕ • GERADE RINGSCHLÜSSEL



















• Forged • Chromium-plated • Satin

Code	Size (mm)		C (mm)	B (mm)	C' (mm)		8
36606	6 x 7	120	12.0	10.8	5.5	Х	20/200
36608	8 x 9	135	16.5	13.2	6.5	Х	20/200
36610	10 x 11	150	19.8	16.5	7.5	Х	20/200
36612	12 x 13	165	22.0	19.8	8.5	Х	20/100
36614	14 x 15	185	25.0	22.0	8.5	Х	20/100
36616	16 x 17	210	26.5	25.0	9.5	Х	20/100
36618	18 x 19	225	28.6	27.6	10.5	Х	10/50
36620	20 x 22	240	33.6	30.5	12.5	Х	5/50
36621	21 x 23	255	35.2	32.0	12.5	X	5/50
36624	24 x 26	270	39.2	36.5	12.5	Х	5/40
36625	25 x 28	285	41.4	37.8	13.5	Х	5/40
36630	30 x 32	335	48.0	45	14.5	Χ	5/20



• Forged • Chromium-plated • Satin • Meet the dimension-related requirements of German DIN 3110 standard • The maximum torque is 60% higher than in German DIN 899 and in US ANSI standard

Code	Size (mm)	L (mm)	D1 (mm)	D2 (mm)	T1 (mm)	T2 (mm)		0
36006	6 x 7	167	12.0	10.5	6.0	5.3	x	5/30
36008	8 x 9	182	15.0	13.5	7.0	6.3	Х	5/30
36010	10 x 11	198	18.0	16.5	8.5	7.3	X	5/30
36012	12 x 13	217	21.0	19.5	9.0	8.7	Х	5/20
36014	14 x 15	239	23.5	22.0	9.5	9.0	Х	5/20
36016	16 x 17	204	26.5	25.5	11.0	10.5	Х	5/20
36018	18 x 19	290	29.5	27.3	12.0	11.0	Х	5/20
36020	20 x 22	316	34.5	31.5	13.0	12.0	Х	5/20
36021	21 x 23	316	35.0	32.0	13.0	12.0	Х	5/20
36024	24 x 27	345	41.2	37.2	14.1	12.5	X	2/8
36025	25 x 28	345	43.0	39.5	14.5	13.5	Х	2/8
36030	30 x 32	360	48.5	45.3	16.5	15.0	Х	2/8



(mm)

8 x 10

10 x 12

11 x 13

13 x 15

14 x 17

36068

36070

36071

36073

36074

(mm)

137

141

166

190

190

256

(mm)

14.3

18.2

21.0

25.0

25.0

15.6

15.6

18.2

22.0

22.0

6.5

6.6

9.2

9.2

PR@LINE HD'



(mm

6.2

6.5

8.0

8.2

8.2

10/200

10/200

10/100

10/100


10/100



2 FLARE NUT SPANNERS

• DOPPELRINGSCHLÜSSEL

• КЛЮЧИ ГАЕЧНЫЕ НАКИДНЫЕ С РАЗРЕЗОМ

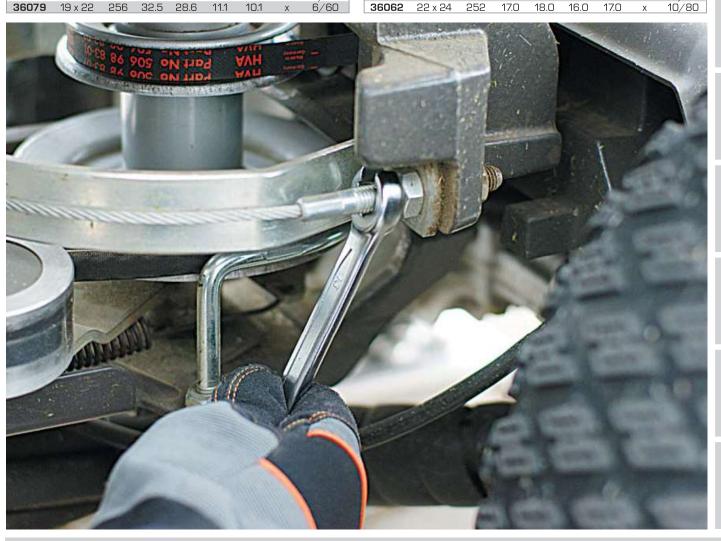







• Forged • Chromium-plated • Satin

Code	Size (mm)		D1 (mm)		T1 (mm)	T2 (mm)		Ø
36686	E6 x E8	113	11.2	9.2	5.6	4.6	Х	20/200
36690	E10 x E12	142	16.7	14.4	7.8	6.5	Х	20/200
36694	E14 x E18	182	21.2	17.2	9.8	82	Х	20/200
36695	E20 x E24	224	28.7	24.8	13.0	11.0	Х	10/100

## 2 RING TORX SPANNERS

• НАБОР КЛЮЧЕЙ HAKИДНЫХ TORX • RING-TORXSCHLÜSSEL





- Forged Chromium-plated Satin
- **4 pcs**.: E6xE8, E10xE12, E14xE18, E20xE24 mm








PR@LINE HD

Code	Quantity (pcs)	Range (mm)		8
36680	4	E6 x E8 - E20 x E24	Х	10









 • Forged • Chromium-plated • Satin • Ground heads • Socket: 50BV30 • Head range of motion: 220°  $\pm5^\circ$ 

Code	Size (mm)	L (mm)	D1 (mm)	D2 (mm)		
36136	6 x 7	180	9.5	10.9	Х	25/100
36138	8 x 9	180	13.0	14.0	Х	25/100
36140	10 x 11	200	15.0	16.0	Х	25/100
36142	12 x 13	220	18.0	19.0	Х	30/120
36144	14 x 15	242	20.0	22.0	Х	25/100
36146	16 x 17	254	24.0	24.0	Х	25/50
36147	17 x 19	260	24.0	26.0	Х	30/60
36148	18 x 19	275	26.0	26.0	Х	25/50
36150	20 x 22	305	28.0	30.5	Х	12/24
36151	21 x 23	305	29.8	33.0	Х	12/24
36154	24 x 27	335	33.0	37.0	Х	12/24
36160	30 x 32	350	40.0	42.0	Х	6/12

## 5 FLEXIBLE SOCKET SPANNER SET

• НАБОР ГАЕЧНЫХ НАКИДНЫХ ИЗОГНУТЫХ (СТАРТЕРНЫХ) КЛЮЧЕЙ • FLEXIBLER STECKSCHLÜSSEL-SÄTZE



PR@LINE HD





- Forged Chromium-plated Satin
- Ground heads Socket: 50BV30
- Head range of motion: 220° ±5°
- **6 pcs**.: 8x9, 10x11, 12x13, 14x15, 16x17, 18x19 mm








PR@LINE HD



Code	Quantity (pcs)	Range (mm)	вох	8
36166	6	8x9 - 18x19	Х	12

## 3 FLEXIBLE SOCKET COMBINATION SPANNERS

• КЛЮЧИ ГАЕЧНЫЕ КОМБИНИРОВАННЫЕ РОЖКОВО-ТОРЦЕВЫЕ ШАРНИРНЫЕ • FLEXIBLE STECKSCHLÜSSEL-KOMBINATIONSSCHLÜSSEL

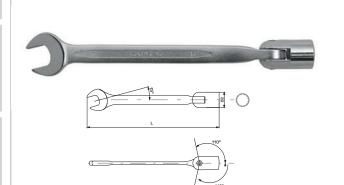











- Forged Chromium-plated Satin Ground heads
- Socket: 50BV30 Head range of motion: 220° ±5°


Code	Size (mm)	L (mm)	D2 (mm)		8
36090	10	180	15	Х	30/120
36093	13	210	19	Χ	25/100
36097	17	235	24	Χ	25/50
36099	19	235	26	Х	25/50

FLEXIBLE TORX SOCKET SPANNERS

· КЛЮЧИ КОМБИНИРОВАННЫЕ ТОРЦЕВЫЕ- TORX ШАРНИРНЫЕ

• FLEXIBLE TORX-STECKSCHLÜSSEL



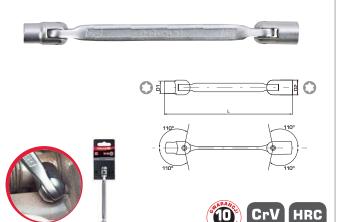

 • Forged • Chromium-plated • Satin • Socket: 50BV30 • Head range of motion: 220°  $\pm 5^\circ$ 

Code	Size (mm)	L (mm)	D1 (mm)	D2 (mm)		0
36116	E6 x E8	182	8.3	9.9	Х	25/100
36120	E10 x E12	200	12.0	15.0	Х	25/100
36124	E14 x E16	220	16.3	19.0	Х	25/100
36128	E18 x E20	240	20.5	22.0	Х	25/50
36132	E22 x E24	258	25.0	26.0	Х	25/50



## 2 FLEXIBLE TORX SPANNERS

• КЛЮЧИ ШАРНИРНЫЕ TORX • FLEXIBLE TORX-SCHLÜSSEL







- Forged Chromium-plated Satin TORX: 8660V
- Head range of motion: 220° ±5°

Code	Size (mm)	L (mm)	d1 (mm)	d2 (mm)	D (mm)		<b>Ø</b>
36106	T15 x T20	220	3.26	3.8	15	х	25/100
36107	T25 x T27	220	4.40	5.0	15	Х	25/100
36108	T30 x T40	220	5.48	6.6	15	Х	25/100
36109	T45 x T50	240	7.70	8.8	18	Х	25/50
36110	T55 x T60	240	11.17	13.2	18	Х	25/50

## 3 FLEXIBLE TORX SPANNER SET

• НАБОР КЛЮЧЕЙ ШАРНИРНЫХ TORX •FLEXIBLER TORX-SCHLÜSSELSATZ









- - 6140 44±
    e of motion:
- Forged Chromium-plated Satin Head range of motion: 220°  $\pm 5^\circ$  The maximum torque is 30% higher than in German DIN 896 standard
- **5 pcs**.: T15xT20, T25xT27, T30xT40, T45xT50, T55xT60

Code	Quantity (pcs)	Range (mm)	вох	8
36105	5	T15xT20 - T55xT60	Х	12

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Screwdrivers, Nut Drivers & Socket Drivers category:

Click to view products by Proline manufacturer:

Other Similar products are found below:

1406504-2 2-21006-8 27850 CE-16-03400-00-HNDLE-TORQ 30246 323451-000 46722 16538 XW4Z-00B 96025 96030 96560 96703 96430 31830 92270 96012 96436 96536 92064 92008 72820 92005 76070 96520 92040 36372 96416 92024 96420 76005 96570 72823 96325 96525 96720 31832 76019 92004 76007 92069 92020 76021 96523 96510 96427 96425 96415 96320 92073