

TECHNICAL DATA SHEET




PG Type Nylon Cable Gland

**RoHS
Compliant**

Material	PA Nylon
Seal and washer	NBR
Properties	V2(UL94), free of halogen, phosphor and cadium
Working Temperature	40 to 100 °C in static state, instantaneous heat resistance up to 120 °C, -20 to 80 °C in dynamic state, instantaneous heat resistance up to 100 °C.

PG Type Nylon Cable Glands						
Part No.	Customer Code	Cable Range mm	H mm	GL mm	Spanner size mm	Colours
PG07	CBBR7347/CBBR7348	3-6.5	21	8	15	Black Grey White Red Blue
PG09	CBBR7350	4-8	21	8	19	
PG11	CBBR7351/CBBR7352	5-10	25	8	22	
PG13.5	CBBR7354	6-12	27	9	24	
PG16	CBBR7356	10-14	28	10	27	
PG21		13-18	31	11	33	
PG29		18-25	39	11	42	
PG36		22-32	48	13	53	
PG42		32-38	49	13	60	
PG48		37-44	49	14	65	

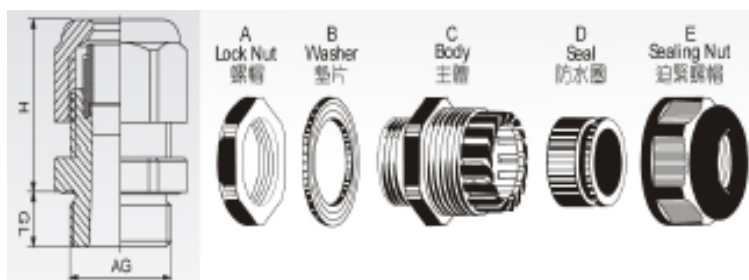

Important Notice : This data sheet and its contents (the "Information") belong to pro-POWER. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but pro-POWER assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where pro-POWER was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict pro-POWER's liability for death or personal injury resulting from its negligence.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pro Power manufacturer:

Other Similar products are found below :

[PPCY4C1.00 50M PP000945](#) [PP000952](#) [PP000870](#) [PETGY10BG5](#) [3140BLK](#) [15107](#) [15099](#) [1475813](#) [6491B-1.50MMBLU100M](#)
[SPUL5M/9.5MMBLK](#) [SP3X39/13-5MBLACK](#) [VFFC-1-0](#) [PP001583](#) [PP001628](#) [PP002011](#) [PP002168](#) [PP002171](#) [BSFRG-025 50M](#)
[PP002801](#) [CTFC-18/6-0-STK](#) [PP001080](#) [PP000940](#) [PP000881](#) [PETBK8BG5](#) [A-WPT50/SL](#) [PPYY4C1.50](#) [PPSY2C1.00 50M](#) [89T BLACK](#)
[SPC19910](#) [PP001561](#) [PP001646](#) [PP002155](#) [PP002504](#) [PP002583](#) [PP002740](#) [AGT50X50SIL](#) [PG-07 GREY](#) [PP001192](#) [PP001082](#) [PP000481](#)
[PP000924](#) [PPYY4C0.75 100M](#) [PPYY7C0.75 50M](#) [PP002426](#) [PP002528](#) [PP002778](#) [PPC210](#) [PP001093](#) [PP001091](#)