


Time Delay | 0.126x0.064 inch Thick Film Chip Fuses

1206TD Series

1206TD Series are the fuses set the industry standard for performance, reliability and quality. The solder-free design provides excellent on-off and temperature cycling characteristics during use and also makes our SMD fuses more heat and shock tolerant than typical subminiature fuses.



Features

- High inrush current withstanding capability
- AEC-Q200 Automotive Grade Certified
- Compatible with reflow and wave solder
- Ceramic and glass construction Excellent environmental integrity
- One time positive disconnect
- Lead Free and Halogen free material

Applications

- Flat panel displays and televisions
- Automotive infotainment and ECU
- Computer servers
- Portable electronics
- Mobile device chargers
- Power Battery Packs

Electrical Characteristics

Amp Rating	% of Amp Rating	Opening Time
0.63~30A	100%	4 Hours Min.
0.63~3A	200%	1sec~60sec
0.63~5A	250%	5 Seconds Max.
0.63~5A	300%	0.1sec~3sec
6~30A	350%	5 Seconds Max.
0.63~30A	1000%	0.2ms~20ms

Specification

Part Number	Ampere Rating (A)	Voltage Rating	Interrupting Rating	Typical Cold Resistance (Ohms)	Typical Melting I ² t (A ² Sec)	Typical Voltage Drop (V)	Marking Code
1206TD-R630	0.63	72Vdc @ 50A 63Vdc @ 50A		1.08	0.009	0.950	B
1206TD-R750	0.75			0.85	0.01	0.900	0.75
1206TD-1A	1.00			0.48	0.11	0.510	H
1206TD-1.25A	1.25			0.33	0.15	0.500	H
1206TD-1.5A	1.50			0.23	0.17	0.465	K
1206TD-1.75A	1.75			0.18	0.20	0.450	E
1206TD-2A	2.00			0.135	0.41	0.316	N
1206TD-2.5A	2.50			0.075	0.68	0.240	O
1206TD-3A	3.00			0.047	1.5	0.187	P
1206TD-3.5A	3.50			0.038	2.0	0.180	R
1206TD-4A	4.00			0.034	2.5	0.173	S
1206TD-4.5A	4.50			0.029	2.65	0.164	X
1206TD-5A	5.00			0.024	4	0.145	T
1206TD-6A	6.00			0.016	12	0.140	F
1206TD-7A	7.00	0.0123	14	0.130	7		
1206TD-8A	8.00	0.0083	16	0.123	M		
1206TD-10A	10.0	0.0065	22	0.110	U		
1206TD-12A	12.0	0.0050	11.5	0.085	12		
1206TD-15A	15.0	0.0037	16.5	0.078	15		
1206TD-20A	20.0	0.0034	50	0.080	Q		
1206TD-25A	25.0	0.0016	60	0.090	L		
1206TD-30A	30.0	0.0013	100	0.090	Z		

◦ DC Interrupting Rating (Measured at rated voltage, time constant of less than 50 microseconds, battery source)
 ◦ DC Cold Resistance are measured at <10% of rated current in ambient temperature of 25 C
 ◦ Typical Pre-arcing I²t are measured at 10In Current
 Choice fuse for surge application (USB charger etc.), make sure the I²t of fuse is 4 times than surge.
 ◦ 1206TD-12A&15A are higher I²t version than 1206TD-12&15.
 Specifications are subject to change without notice. Application testing is strongly recommended.


Time Delay | 0.126x0.064 inch

Thick Film Chip Fuses


1206TD Series

Dimension

Unit: mm/inch




Pad layout



Packaging

- Quantity: 3,000pcs
- 8mm wide tape on 178mm(7 inch) diameter reel -specification EIA Standard 481.

Soldering Parameters

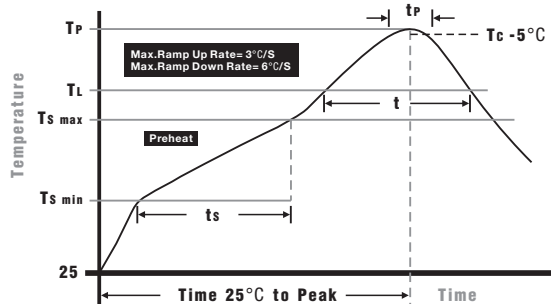


Wave Soldering: 260°C, 10 seconds max.
Infrared Reflow: 260°C, 30 seconds max.

IR Reflow Profile

Preheat Heat	
Temperature min (T_{smin})	150°C
Temperature max (T_{smax})	200°C
Time (T_{smin} to T_{smax}) (t_s)	60 - 120 seconds
Average ramp-up rate (T_{smax} to T_p)	3°C/second max.
Liquidous temperature (T_L)	217°C
Time at liquidous (t_L)	60 - 150 seconds
Peak temperature(T_p)	260+0/-5°C
Time within 5°C of actual peak Temperature (t_p)	10 - 30 seconds
Average ramp-down rate (T_p to T_{smax})	6°C/second max.
Time 25 °C to peak temperature	8 minutes max.

Temperature Derating Curve

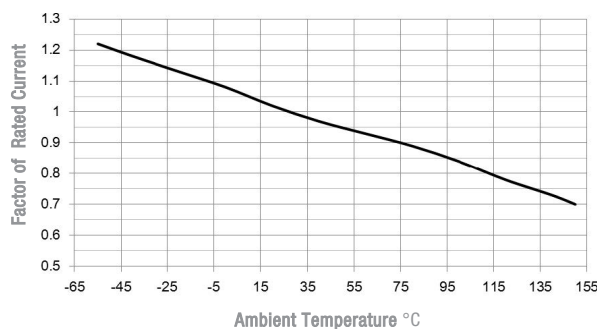


- Normal ambient temperature: 23+/-3°C
- Operating temperature: -55 ~ 150 C , with proper correction factor applied

Time Delay | 0.126x0.064 inch

Thick Film Chip Fuses **1206TD Series**

Average Time Current Curves

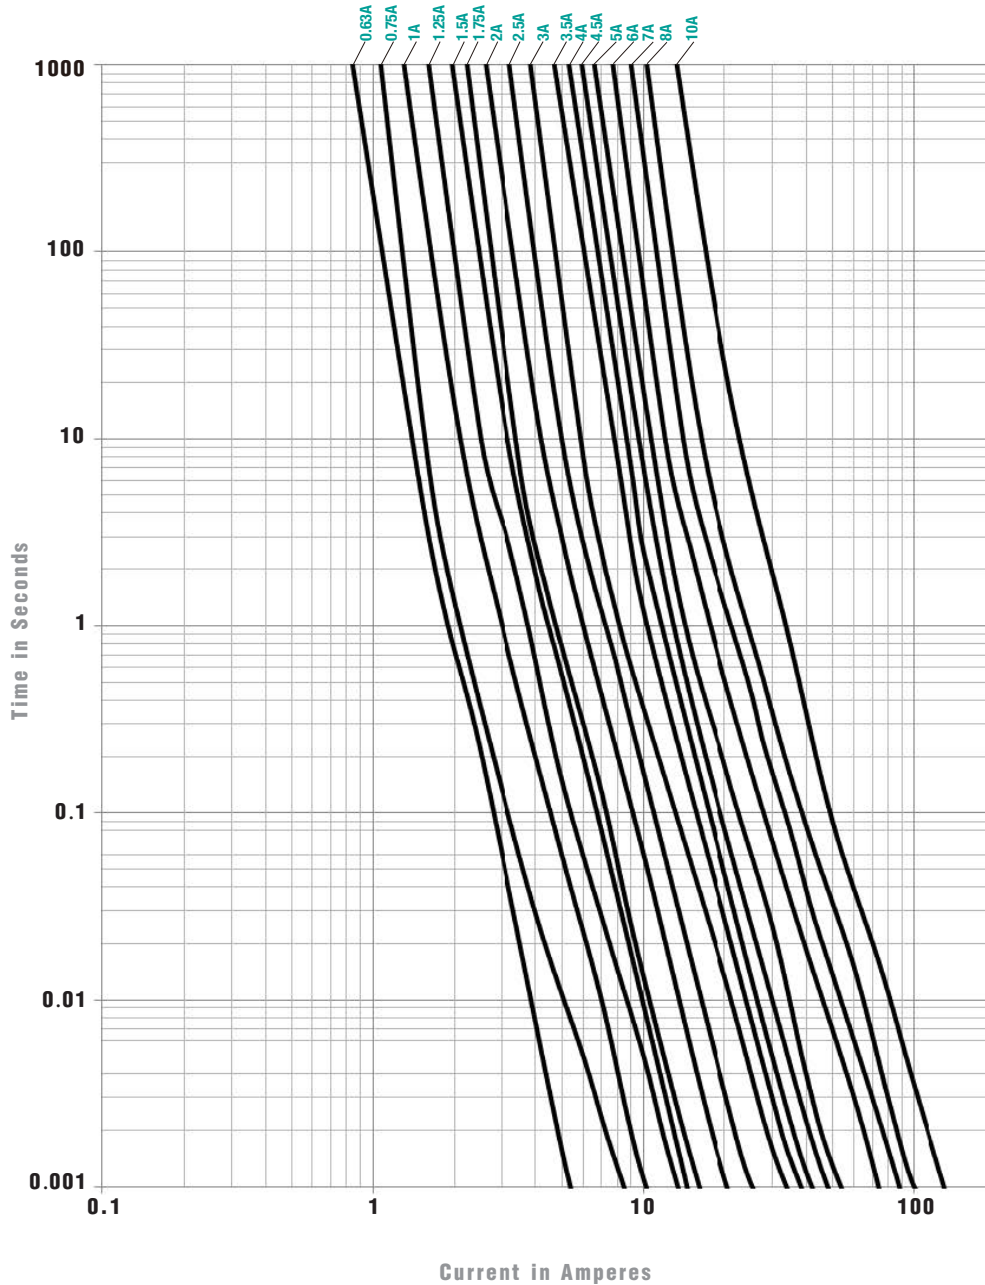


Fast Acting | 0.126x0.064 inch

Thick Film Chip Fuses

1206FA Series

Average Time Current Curves

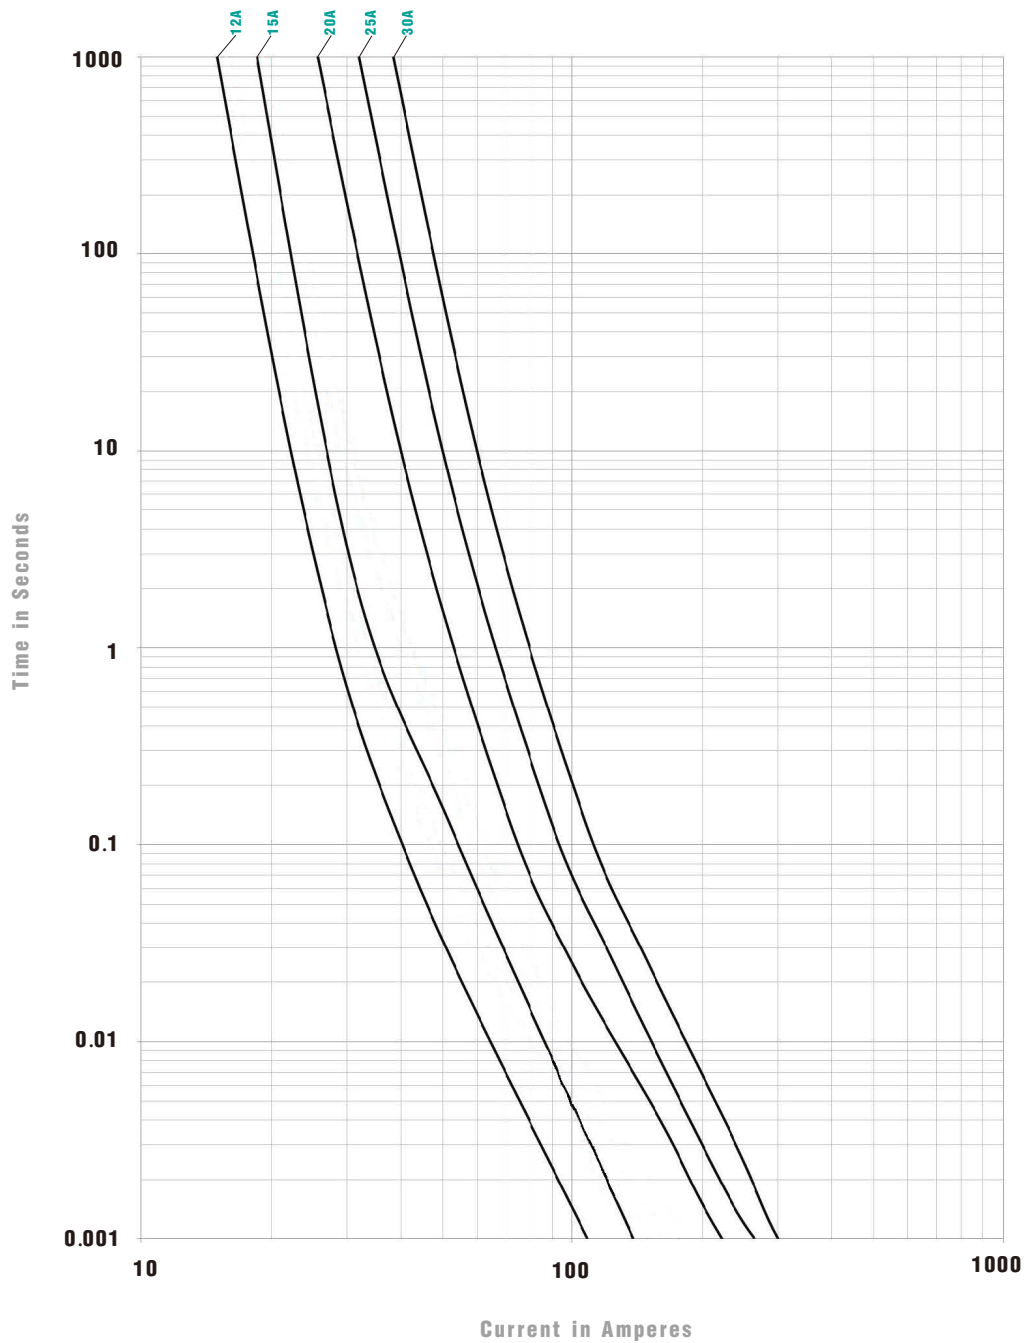

© 2021 PROSEMI Inc. All Rights Reserved. Specifications and features are subject to change without notice. www.prosemitech.com

The PROSEMI logo, and all other PROSEMI trademarks are the property of PROSEMI Inc. All other trademarks are the property of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surface Mount Fuses](#) category:

Click to view products by [PROSEMI](#) manufacturer:

Other Similar products are found below :

[FHC20402ADTP](#) [NFVC6125S0R50TRF](#) [TF16SN2.00TTD](#) [0686-5000-01](#) [0685-4000-01](#) [FCC16501ABTP](#) [FCC16102ABTP](#)
[FHC16322ADTP](#) [0308001.UR](#) [FCC16202ABTP](#) [7010.9962.63](#) [SEF 12A 65V \(G\)](#) [MST 250mA 250V](#) [TB60](#) [06 100.4](#) [TBF50](#) [TBF40](#)
[2010T315mA250V](#) [06 110.7](#) [12 100.1.5](#) [06 110.5](#) [1206FA-R250](#) [R06.100.6](#) [R12.100.15](#) [R06.000.0.375](#) [R06.000.6](#) [R06.100.0.25](#) [R12.000.8](#)
[R06.000.0.5](#) [R06.000.0.75](#) [R06.000.8](#) [R06.100.0.75](#) [R06.100.8](#) [R06.100.0.375](#) [R06.100.0.5](#) [R06.000.7](#) [R06.100.7](#) [S0603-S-2.0A](#) [F06F3.5](#)
[F12F20](#) [TA3VT2](#) [F12F1](#) [F06F7](#) [F06T3.5](#) [F06F0.375](#) [F06T8](#) [F12F30](#) [4T2A250V](#) [R12.100.7](#) [R12.100.30](#)