

Description

2410FA Series SMD fuse for the small size and good electrical performance, reliability and quality.

Electrical Characteristics

Current Rating	% of Ampere Rating	Opening Time
500mA-15A	100%	4 hours Min
500mA-1.5A	200%	120 sec Max
2A-15A	200%	5 sec Max



Features

- Designed to UL 248-14
- Small size
- Compatible with reflow and wave soldering
- RoHS compliant and Halogen Free
- One time positive disconnect

Applications

- Notebook PC
- Backlight inverter
- Power supply
- Storage system
- Telecom system
- Battery charging circuit protection
- Industrial equipment


Specification



Product Code	Current Rating	Voltage Rating	Interrupting Rating	Resistance (ohms) Typ.	Typical Melting I ² t (A ² Sec)	Typical Voltage Drop (mV)
2410FA-R500	500mA	125VAC 125VDC	50A@125VAC 50A@125VDC	0.600	0.053	410
2410FA-R800	800mA			0.306	0.51	370
2410FA-1A	1A			0.256	0.85	360
2410FA-1.5A	1.5A			0.188	0.83	300
2410FA-2A	2A			0.028	1	96
2410FA-3A	3A			0.018	3	86
2410FA-4A	4A			0.013	5	85
2410FA-5A	5A			0.010	7	81
2410FA-6.3A	6.3A			0.008	12	80
2410FA-7A	7A			0.007	19	80
2410FA-8A	8A			0.006	23	78
2410FA-10A	10A			0.005	35	77
2410FA-12A	12A			0.004	55	76
2410FA-15A	15A			0.003	98	75

- AC Interrupting Rating - Measured at designated voltage, 100% power factor random closing.
- DC Interrupting Rating - Measured at designated voltage, time constant of less than 50 microseconds, battery source.
- DC Cold Resistance are measured at <10% of rated current in ambient temperature of 25°C
- Typical Melting I²t - Measured with a battery bank at Rated DC voltage, 10In-rated current, but not exceeding the interrupting rating, time constant of calibrated circuit less than 50 microseconds.

Dimension

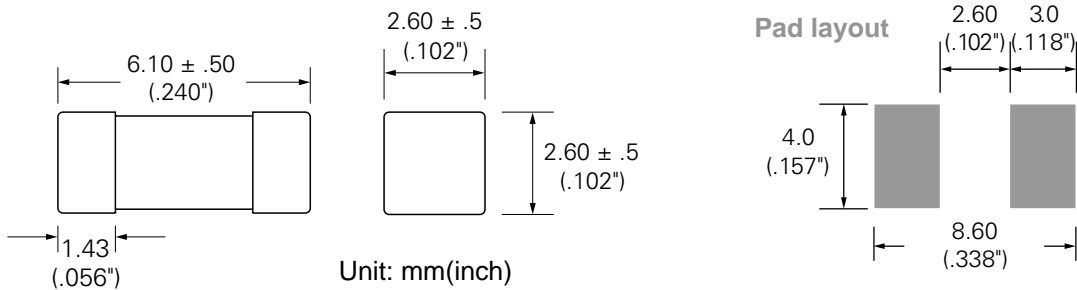

Packaging

500mA~15A 1000pcs/Tape and Reel

Soldering Characteristics

Wave Immersion

- Reservoir Temperature: 260° C
- Time in Reservoir : 10 Seconds Maximum


Infrared Reflow

- Temperature: 260° C
- Time: 30 Seconds Maximum

Hand Soldering


- Maximum tip temperature: 350°C
- Maximum soldering time: 5 seconds max

Temperature Re-rating Curve

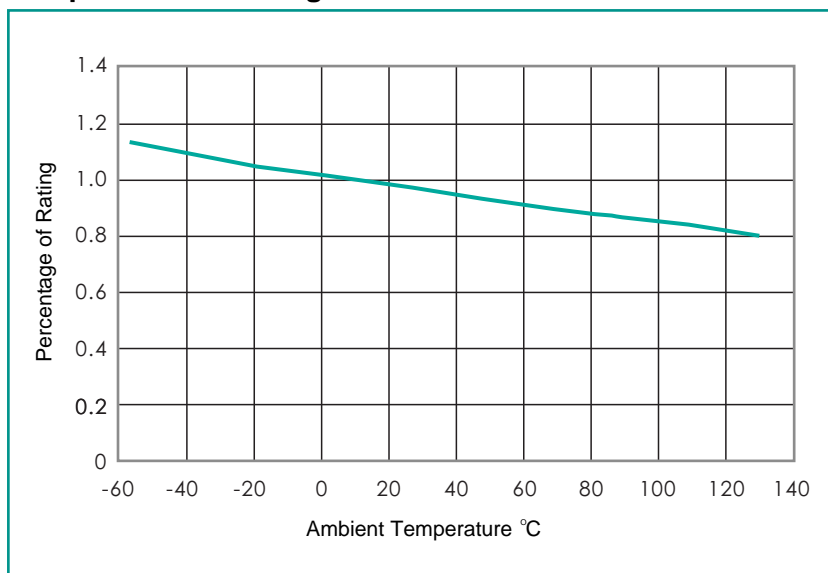

- Normal Operating Temperature: 25°C ± 2°C
- Operating Temperature: -55°C to 125°C with proper correction factor applied.
- Chart of correction factor

Time Current Curves

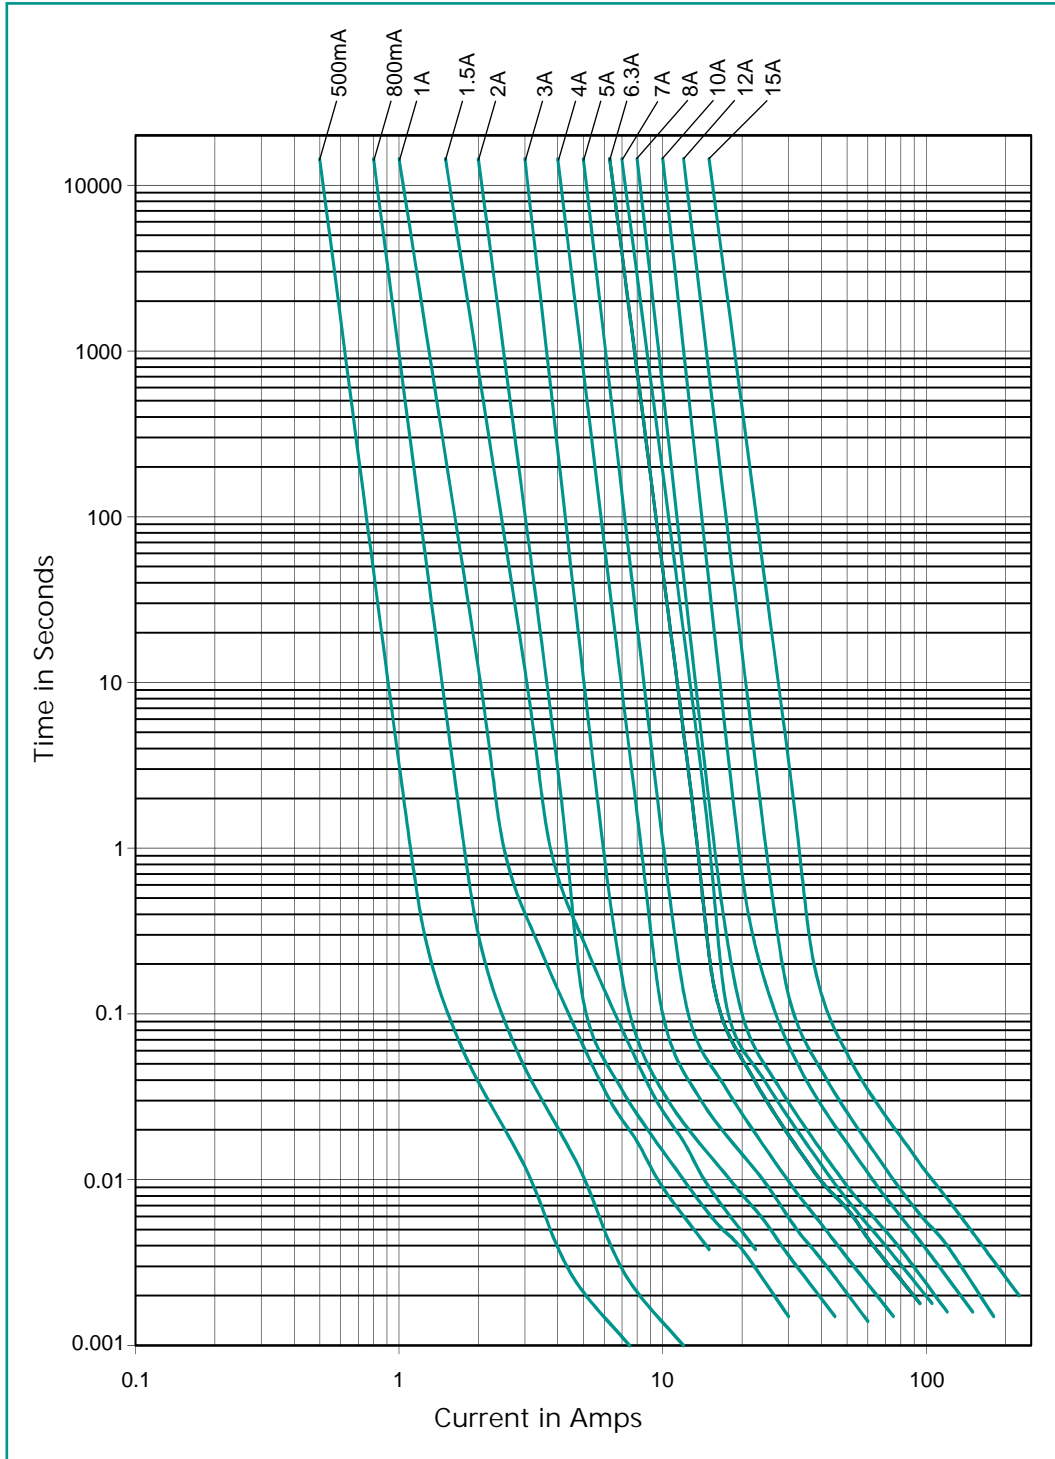

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surface Mount Fuses](#) category:

Click to view products by [PROSEMI](#) manufacturer:

Other Similar products are found below :

[FHC20402ADTP](#) [NFVC6125S0R50TRF](#) [SFT-125MA](#) [TF16SN2.00TTD](#) [FCC16501ABTP](#) [FCC16102ABTP](#) [FHC16322ADTP](#) [0308.250UR](#)
[0308.375UR](#) [0308.500UR](#) [0308.750UR](#) [0308001.UR](#) [030801.5UR](#) [F0603G0R03FNTR](#) [SKY87604-12](#) [SKY87604-11](#) [SKY87604-13](#)
[R451003.L](#) [R451.500L](#) [R451001.L](#) [3-103-119](#) [3-103-123](#) [SGB401](#) [SGB075](#) [0154002.DRL](#) [0154008.DRL](#) [0154.500DRL](#) [189140.1,25](#)
[189140.0,8](#) [189140.0,4](#) [189140.0,63](#) [189140.0,25](#) [0402FA-R200](#) [0402SFF150F/24-2](#) [0435.250KRHFS](#) [0468003.WR](#) [0494001.NRHF](#)
[0494002.NRHF](#) [0494003.NRHF](#) [049402.5NRHF](#) [049403.5NRHF](#) [0494.250NRHF](#) [0494.375NRHF](#) [0494.500NRHF](#) [CF06V3T1R60](#)
[CF06V3T2R50](#) [06H1300D](#) [JFC0603-1200FS](#) [CP06V3T2R0](#) [06F-0200L1](#)