

Size 3920 (10x5.2mm) Current Shunt Resistors


SRC39 Series



SRC39 Series Current Shunt Resistors aid precision measurement and high-current applications. A wide range of precision shunts, designed for use with kilowatt-hour meters and other high-current applications where a high level of accuracy is required, is now available from PROSEMI.


Features

- Power rating up to 5 W at 100°C
- Excellent long term stability
- Continuous current load up to 160A at 0.2mΩ
- Halogen free, lead free and RoHS compliant



Applications

- Power modules
- Frequency converters
- Current sensor for power hybrid sources
- High current for automotive
- Lithium battery protection board

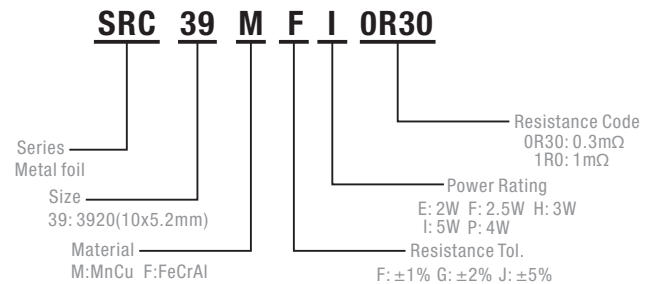

Part Number	Power Rating $P_{100^{\circ}\text{C}}$ (W)	Resistance Range (mΩ)	TCR (ppm/°C)	Thickness (mm)	Material
SRC39F_E5R0	2	5	±50	0.85±0.1	FeCrAl
SRC39F_F4R0	2.5	4	±50	0.85±0.1	FeCrAl
SRC39F_H3R0	3	3	±50	0.95±0.1	FeCrAl
SRC39F_P2R0	4	2	±50	1.19±0.1	FeCrAl
SRC39M_I1R0	5	1	±50	0.92±0.1	MnCu
SRC39M_IOR50	5	0.5	±50	1.36±0.1	MnCu
SRC39M_IOR30	5	0.3	±70	1.92±0.1	MnCu
SRC39M_IOR20	5	0.2	±150	1.95±0.1	MnCu


- Applicable temperature range of -55°C to +170°C
- Power rating is guaranteed for use an aluminum substrate (MCPCB) Part
- Number definition “_” of Resistance Tolerance

Size 3920 (10x5.2mm)

Current Shunt Resistors

SRC39 Series

Dimension

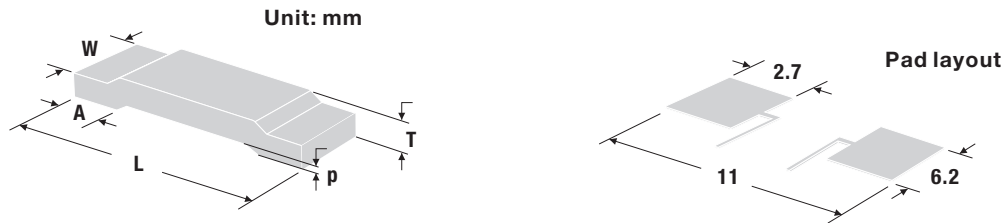

Type	L	W	T	A	p
SRC39F_E5R0	10.2±0.2	5.2±0.1	0.85±0.1	1.8±0.1	0.5±0.1
SRC39F_F4R0	10.2±0.2	5.2±0.1	0.85±0.1	1.8±0.1	0.5±0.1
SRC39F_H3R0	10.2±0.2	5.2±0.1	0.95±0.1	1.8±0.1	0.5±0.1
SRC39F_P2R0	10.2±0.2	5.2±0.1	1.19±0.1	1.8±0.1	0.5±0.1
SRC39M_I1R0	10.2±0.2	5.2±0.1	0.92±0.1	1.8±0.1	0.5±0.1
SRC39M_I0R50	10.2±0.2	5.2±0.1	1.36±0.1	1.8±0.1	0.5±0.1
SRC39M_I0R30	10.2±0.2	5.2±0.1	1.92±0.1	1.8±0.1	0.5±0.1
SRC39M_I0R20	10.2±0.2	5.2±0.1	1.95±0.1	1.8±0.1	0.5±0.1


Packaging

- Quantity: 3,000pcs
- 16mm wide tape on 330mm(13 inch) diameter reel -specification EIA Standard 481.

Storage Conditions

- Temperature: 22~28°C, Humidity: 40~75%

Derating Curve

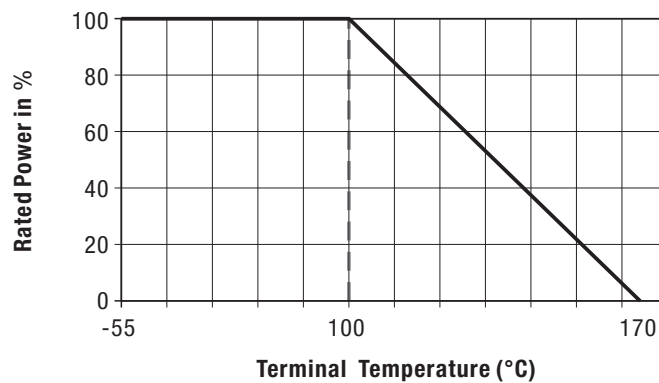


Size 3920 (10x5.2mm)

Current Shunt Resistors

SRC39 Series

Soldering Parameters

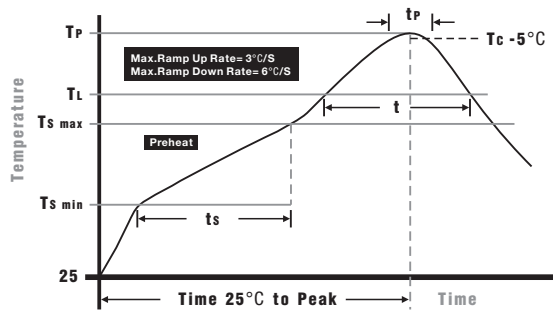

Wave Soldering: 260°C, 10 seconds max.
Infrared Reflow: 260°C, 30 seconds max.

IR Reflow Profile

Preheat Heat	
Temperature min (T _{smin})	150°C
Temperature max (T _{smax})	200°C
Time (T _{smin} to T _{smax}) (ts)	60 - 120 seconds
Average ramp-up rate (T_{smax} to T_p)	3°C/second max.
Liquidous temperature (TL)	217°C
Time at liquidous (t _l)	60 - 150 seconds
Peak temperature (T_p)	260+0/-5°C
Time within 5°C of actual peak Temperature (tp)	10 - 30 seconds
Average ramp-down rate (T_p to T_{smax})	6°C/second max.
Time 25 °C to peak temperature	8 minutes max.

Performances

Short Time Overload	Loading 5 times rate power 5sec
Moisture Resistance	The specimens shall be placed in a chamber and subjected to a relative humidity of 90~98% percent and a temperature of 25°C / 65°C 10 cycles
High Temperature Exposure	The chip (mounted on board) is exposed in the heat chamber 125°C for 1000 hrs.
Rapid Change of Temperature	The chip (mounted on board) is exposed, -55±3°C (30min.)/+125±2°C (30min.) for 5 cycles.
Load Life	Apply rated power for 1000 hours with 1.5 hours ON and 0.5 hour OFF.

© 2017 PROSEMI Inc. All Rights Reserved.
 Specifications and features are subject to change without notice.
www.prosemitech.com

The PROSEMI logo, and all other PROSEMI trademarks are the property of PROSEMI Inc. All other trademarks are the property of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Current Sense Resistors - SMD category](#):

Click to view products by [PROSEMI manufacturer](#):

Other Similar products are found below :

[CRL0603-FW-R700ELF](#) [PFS35-200RF1](#) [NPS 2-T126 5.000 OHM 1%](#) [PFS35-0R01J1](#) [PFS35-0R05J1](#) [PFS35-5RF1](#) [CD2015FC-0.10-1%](#)
[PR2512FKF7W0R004L](#) [RC1005F124CS](#) [RL73K3AR56JTDF](#) [RL7520WT-R001-F](#) [RL7520WT-R009-G](#) [RL7520WT-R020-F](#) [LRC-](#)
[LR2512LF-01-R820J](#) [WR06X104JGLJ](#) [TL2BR01F](#) [65709-330](#) [SP1R12J](#) [RL7520WT-R039-G](#) [RL7520WT-R002-F](#) [RL7520WT-R005-F](#)
[KRL1632E-C-R200-F-T5](#) [KRL1632E-C-R200-F-T1](#) [RLP73M1ER051FTDF](#) [RLP73M2AR075FTDF](#) [SR731ERTTP5R10F](#) [SR731ERTTP100J](#)
[SR731ERTTP6R80F](#) [SR731ERTTP4R70F](#) [SR731ERTTP2R20F](#) [SR731ERTTP3R90F](#) [SR731ERTTP1R00F](#) [SR731ERTTP10R0F](#)
[SR731ERTTP2R00F](#) [SR731ERTTP8R20F](#) [SR731ERTTP3R9J](#) [SR731ERTTP8R2J](#) [SR731ERTTP2R0J](#) [SR731ERTTP4R7J](#)
[SR731ERTTP9R1J](#) [SR731ERTTP1R0J](#) [SR731ERTTP2R2J](#) [SR731ERTTP5R1J](#) [SR731ERTTP6R8J](#) [SR731ERTTP9R10F](#) [FCSL64R007JER](#)
[LRF1206-R018FW](#) [TLR2B10DR022FTDG](#) [TLR2H10DR01FTDG](#) [73L4R10G](#)