

Size 5930 (15x7.75mm) Current Shunt Resistors

SRC59 Series



SRC59 Series Current Shunt Resistors aid precision measurement and high-current applications. A wide range of precision shunts, designed for use with kilowatt-hour meters and other high-current applications where a high level of accuracy is required, is now available from PROSEMI.


Features

- Power rating up to 10 W at 100°C
- Excellent long term stability
- Extremely low resistance values (down to 0.2mΩ)
- Halogen free, lead free and RoHS compliant



Applications

- Power modules
- Frequency converters
- Current sensor for power hybrid sources
- High current for automotive
- Lithium battery protection board

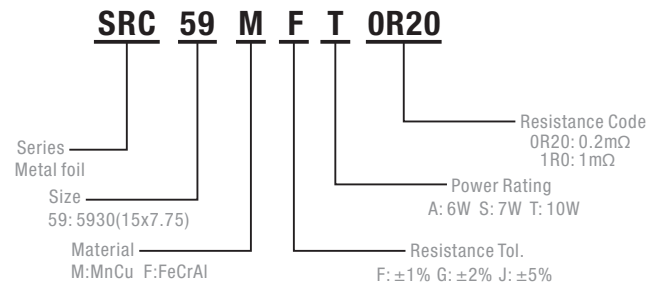

Part Number	Power Rating $P_{100^\circ\text{C}}$ (W)	Resistance Range (mΩ)	TCR (ppm/°C)	Thickness (mm)	Material
SRC59F_A2R0	6	2	±50	0.94±0.1	FeCrAl
SRC59F_A1R0	6	1	±50	1.37±0.1	FeCrAl
SRC59M_AOR50	6	0.5	±75	1.09±0.1	MnCu
SRC59M_SOR30	7	0.3	±100	1.45±0.1	MnCu
SRC59M_TOR20	10	0.2	±100	1.93±0.1	MnCu


- Applicable temperature range of -55°C to +170°C
- Power rating is guaranteed for use on an aluminum substrate (MCPCB) Part
- Number definition “_” of Resistance Tolerance

Size 5930 (15x7.75mm)

Current Shunt Resistors

SRC59 Series

Dimension

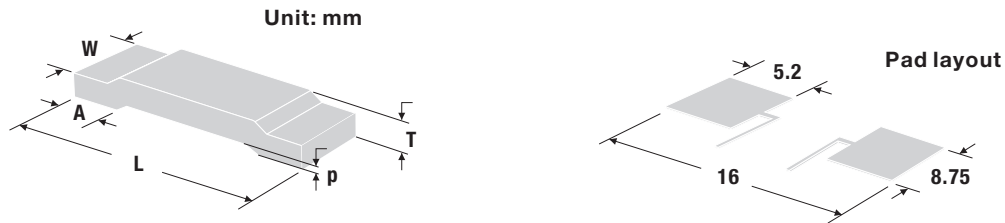

Type	L	W	T	A	p
SRC59F_A2R0	15±0.2	7.75±0.1	0.94±0.1	4.2±0.1	1.0±0.1
SRC59F_A1R0	15±0.2	7.75±0.1	1.37±0.1	4.2±0.1	1.0±0.1
SRC59M_A0R50	15±0.2	7.75±0.1	1.09±0.1	4.2±0.1	1.0±0.1
SRC59M_S0R30	15±0.2	7.75±0.1	1.45±0.1	4.2±0.1	1.0±0.1
SRC59M_T0R20	15±0.2	7.75±0.1	1.93±0.1	4.2±0.1	1.0±0.1


Packaging

- Quantity: 2,000pcs
- 24mm wide tape on 330mm(13 inch) diameter reel -specification EIA Standard 481.

Storage Conditions

- Temperature: 22~28°C, Humidity: 40~75%

Derating Curve

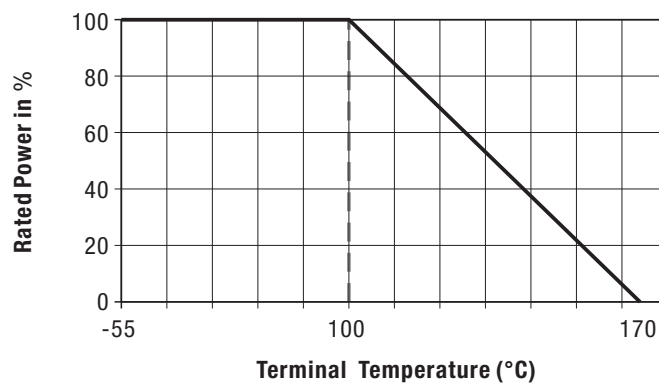


Size 5930 (15x7.75mm)

Current Shunt Resistors

SRC59 Series

Soldering Parameters

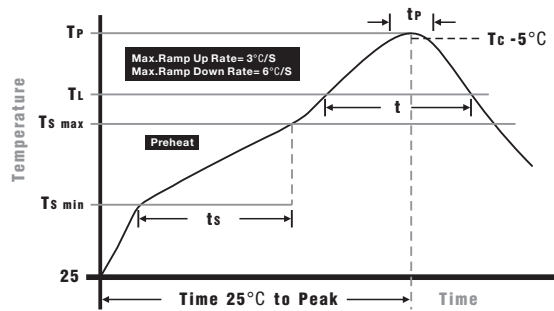

Wave Soldering: 260°C, 10 seconds max.
Infrared Reflow: 260°C, 30 seconds max.

IR Reflow Profile

Preheat Heat	
Temperature min (T _{min})	150°C
Temperature max (T _{max})	200°C
Time (T _{min} to T _{max}) (t _s)	60 - 120 seconds
Average ramp-up rate (T_{max} to T_p)	3°C/second max.
Liquidous temperature (T_L)	217°C
Time at liquidous (t _L)	60 - 150 seconds
Peak temperature (T_p)	260+0/-5°C
Time within 5°C of actual peak Temperature (t_p)	10 - 30 seconds
Average ramp-down rate (T_p to T_{max})	6°C/second max.
Time 25 °C to peak temperature	8 minutes max.

Performances

Short Time Overload	Loading 5 times rate power 5sec
Moisture Resistance	The specimens shall be placed in a chamber and subjected to a relative humidity of 90~98% percent and a temperature of 25°C / 65°C 10 cycles
High Temperature Exposure	The chip (mounted on board) is exposed in the heat chamber 125°C for 1000 hrs.
Rapid Change of Temperature	The chip (mounted on board) is exposed, -55±3°C (30min.)/+125±2°C (30min.) for 5 cycles.
Load Life	Apply rated power for 1000 hours with 1.5 hours ON and 0.5 hour OFF.

© 2017 PROSEMI Inc. All Rights Reserved.
 Specifications and features are subject to change without notice.
www.prosemitech.com

The PROSEMI logo, and all other PROSEMI trademarks are the property of PROSEMI Inc. All other trademarks are the property of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Current Sense Resistors - SMD category](#):

Click to view products by [PROSEMI manufacturer](#):

Other Similar products are found below :

[CRL0603-FW-R700ELF](#) [PFS35-200RF1](#) [NPS 2-T126 5.000 OHM 1%](#) [PFS35-0R01J1](#) [PFS35-0R05J1](#) [PFS35-5RF1](#) [CD2015FC-0.10-1%](#)
[PR2512FKF7W0R004L](#) [RC1005F124CS](#) [RL73K3AR56JTDF](#) [RL7520WT-R001-F](#) [RL7520WT-R009-G](#) [RL7520WT-R020-F](#) [LRC-](#)
[LR2512LF-01-R820J](#) [WR06X104JGLJ](#) [TL2BR01F](#) [65709-330](#) [SP1R12J](#) [RL7520WT-R039-G](#) [RL7520WT-R002-F](#) [LRF2010-R003JW](#)
[KRL1632E-C-R200-F-T5](#) [KRL1632E-C-R200-F-T1](#) [RLP73M1ER051FTDF](#) [RLP73M2AR075FTDF](#) [RLP73M1JR051FTDF](#)
[SR731ERTTP5R10F](#) [SR731ERTTP100J](#) [SR731ERTTP6R80F](#) [SR731ERTTP4R70F](#) [SR731ERTTP2R20F](#) [SR731ERTTP3R90F](#)
[SR731ERTTP1R00F](#) [SR731ERTTP10R0F](#) [SR731ERTTP2R00F](#) [SR731ERTTP8R20F](#) [SR731ERTTP3R9J](#) [SR731ERTTP8R2J](#)
[SR731ERTTP2R0J](#) [SR731ERTTP4R7J](#) [SR731ERTTP9R1J](#) [SR731ERTTP1R0J](#) [SR731ERTTP2R2J](#) [SR731ERTTP5R1J](#) [SR731ERTTP6R8J](#)
[SR731ERTTP9R10F](#) [RCWE2512R180FKEA](#) [FCSL64R007JER](#) [LRF1206-R018FW](#) [TLR2B10DR022FTDG](#)