

Surface-Mount Devices | 1206 Size

**SRF1206 Series**

## PTC Resettable Fuses

### Features

- Compact design saves board space
- Fast response to fault currents
- Compatible with high temperature solders
- Low resistance
- Low-profile
- RoHS compliant, lead-free and halogen-free



### Applications

- Computer
- Portable electronics
- Multimedia
- Game machines
- Telephony and broadband
- Mobile phones
- Automotive
- Industrial controls



### Electrical Characteristics

Part Number	$I_H$ (A)	$I_T$ (A)	$V_{max}$ (V)	$I_{max}$ (A)	Time to Trip		$P_{d_{typ}}$ (W)	$R_{min}$ ( $\Omega$ )	$R_{1_{max}}$ ( $\Omega$ )
					(A)	(Sec.)			
SRF1206P005	0.05	0.15	30	10	0.25	1.50	0.40	2.500	40.00
SRF1206P010	0.10	0.25	30	10	0.50	1.20	0.40	1.400	15.00
SRF1206P012	0.12	0.29	30	10	1.00	0.20	0.40	1.350	8.500
SRF1206P020	0.20	0.46	24	10	1.00	0.60	0.60	0.600	2.600
SRF1206P025	0.25	0.55	16	10	1.25	0.60	0.60	0.400	2.400
SRF1206P035	0.35	0.75	6	40	8.00	0.10	0.60	0.300	1.200
SRF1206P050	0.50	1.00	13.2	40	8.00	0.10	0.40	0.150	0.750
SRF1206P075	0.75	1.50	6	100	8.00	0.10	0.40	0.100	0.400
SRF1206P100	1.00	2.00	6	100	8.00	0.10	0.60	0.060	0.280
SRF1206P110	1.10	2.20	6	100	8.00	0.10	0.60	0.060	0.280
SRF1206P150	1.50	3.00	6	100	8.00	0.30	0.60	0.030	0.170
SRF1206P200	2.00	4.00	6	100	8.00	1.00	0.70	0.020	0.120


$I_{hold}$  = Hold current: maximum current device will pass without tripping in 25°C still air.  
 $I_{trip}$  = Trip current: minimum current at which the device will trip in 25°C still air.  
 $V_{max}$  = Maximum voltage device can withstand without damage at rated current ( $I_{max}$ )  
 $I_{max}$  = Maximum fault current device can withstand without damage at rated voltage ( $V_{max}$ )  
 $P_d$  = Power dissipated from device when in the tripped state at 25°C still air.

$R_{min}$  = Minimum resistance of device in initial (un-soldered) state.  
 $R_{typ}$  = Typical resistance of device in initial (un-soldered) state.  
 $R_{1_{max}}$  = Maximum resistance of device at 25°C measured one hour after tripping or re-welding of 260°C for 20 sec.

**Thermal Derating Chart** Hold Current (A)


Part Number	Ambient Operating Temperature								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
SRF1206P005	0.08	0.07	0.06	0.05	0.05	0.04	0.04	0.03	0.03
SRF1206P010	0.16	0.14	0.13	0.10	0.09	0.08	0.08	0.07	0.06
SRF1206P012	0.19	0.17	0.15	0.12	0.11	0.10	0.09	0.08	0.07
SRF1206P020	0.30	0.27	0.24	0.20	0.18	0.16	0.14	0.12	0.11
SRF1206P025	0.38	0.34	0.30	0.25	0.23	0.20	0.18	0.15	0.14
SRF1206P035	0.51	0.46	0.40	0.35	0.30	0.27	0.24	0.22	0.18
SRF1206P050	0.76	0.68	0.59	0.50	0.44	0.40	0.35	0.32	0.26
SRF1206P075	1.11	1.00	0.85	0.75	0.67	0.61	0.52	0.50	0.42
SRF1206P100	1.60	1.40	1.30	1.00	0.90	0.80	0.75	0.70	0.60
SRF1206P110	1.64	1.46	1.30	1.10	0.92	0.83	0.80	0.65	0.52
SRF1206P150	2.20	1.99	1.77	1.50	1.34	1.23	1.10	1.01	0.84
SRF1206P200	2.88	2.61	2.28	2.00	1.80	1.66	1.51	1.39	1.19

**Dimensions**

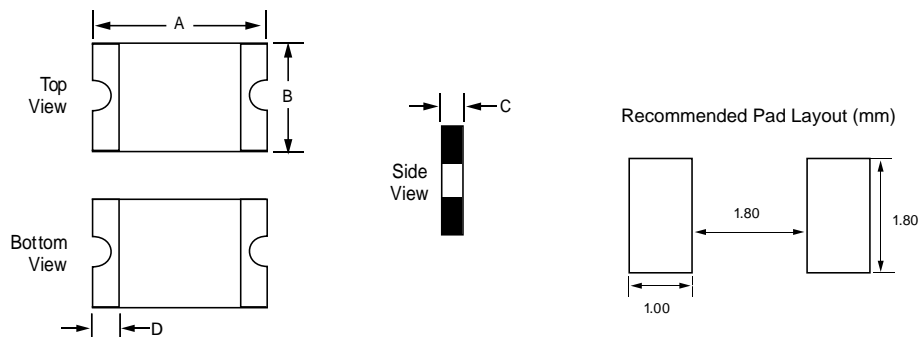

Part Number	Marking	A		B		C		D
		Min.	Max.	Min.	Max.	Min.	Max.	Min.
SRF1206P005	T0	3.00	3.40	1.40	1.80	0.80	1.20	0.25
SRF1206P010	T1	3.00	3.40	1.40	1.80	0.80	1.20	0.25
SRF1206P012	T01	3.00	3.40	1.40	1.80	0.80	1.20	0.25
SRF1206P020	T02	3.00	3.40	1.40	1.80	0.60	1.00	0.25
SRF1206P025	T03	3.00	3.40	1.40	1.80	0.60	1.00	0.25
SRF1206P035	T04	3.00	3.40	1.40	1.80	0.60	1.00	0.25
SRF1206P050	T05	3.00	3.40	1.40	1.80	0.55	0.75	0.25
SRF1206P075	T07	3.00	3.40	1.40	1.80	0.45	0.85	0.25
SRF1206P100	T10	3.00	3.40	1.40	1.80	0.60	1.00	0.25
SRF1206P110	T10	3.00	3.40	1.40	1.80	0.60	1.00	0.25
SRF1206P150	T15	3.00	3.40	1.40	1.80	0.60	1.00	0.25
SRF1206P200	T20	3.00	3.50	1.40	1.80	0.60	1.00	0.25

### Temperature Rerating Curve

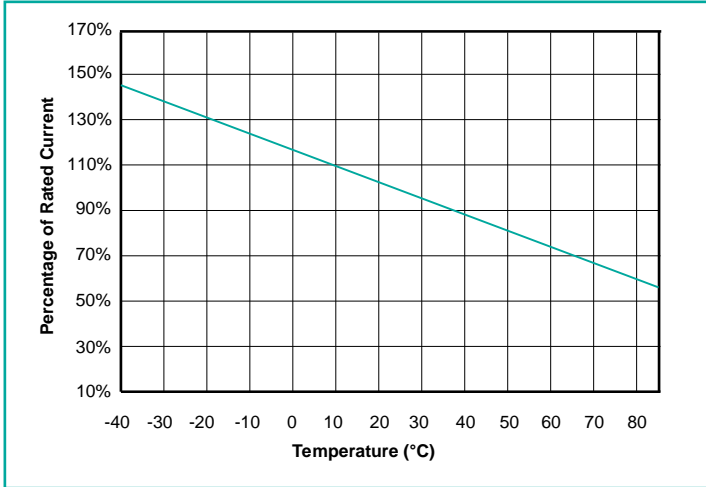

### Packaging Options

$I_{hold}(A)$	Quantity
0.05~0.12, 1~2	3,500pcs
0.2~0.75	4,000pcs

Reel packaging per EIA -481 -1 standard

© 2017 PROSEMI Inc. All Rights Reserved.  
 Specifications and features are subject to change without notice.  
[www.prosemitech.com](http://www.prosemitech.com)

The PROSEMI logo, and all other PROSEMI trademarks are the property of PROSEMI Inc. All other trademarks are the property of their respective owners.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Resettable Fuses - PPTC](#) category:*

*Click to view products by [PROSEMI](#) manufacturer:*

Other Similar products are found below :

[RF0077-000](#) [RF0627-000](#) [RF3301-000](#) [RF3382-000](#) [SMD125-2](#) [RF1973-000](#) [RF2531-000](#) [RF2873-000](#) [RF3060-000](#) [TR600-150Q-B-0.5-0.130](#) [RXE090](#) [5E4795/04-1502](#) [TRF250-080T-B-1.0-0.125](#) [SMD100-2](#) [NIS5431MT1TXG](#) [SMD250-2](#) [RS30-090](#) [RS30-600](#) [RS30-800](#) [RS30-900](#) [RS60RB-160](#) [RS60SB-250](#) [SB250-145](#) [0ZCH0110AF2E](#) [0603L001/60YR](#) [0603L003/36YR](#) [BK250-120-SZ-E0.6](#) [BK60-010-DI-E0.5](#) [BK250-040-DY-E0.6](#) [RF2631-000](#) [NIS5420MT2TXG](#) [NIS5420MT3TXG](#) [NIS6420MT1TWG](#) [RF5032-000](#) [RF5051-000](#) [RF5034-000](#) [RF5105-000](#) [RF5062-000](#) [RF5055-000](#) [RF5052-000](#) [2920L075/72MR](#) [BSMD0603-025-24V](#) [BSMD0402L-005](#) [BSMD0603-010-9V](#) [BSMD1812-020-60V](#) [BSMD2920-400-30V](#) [BSMD0603-010-12V](#) [BSMD0805-035-30V](#) [BSMD1210-150-16V](#) [BSMD0805-003-60V](#)