

# PROXXON

## *Tools with Character!*




**2020/2021**




**PROXXON socket sets – manufactured using most modern production**

**technology in the world's largest cold forging hand tool factory.**




**The ratchet – the key item :**




Made from CrV steel in one single piece. Hardened and with perfect toothing: several of the 52 teeth engage simultaneously for transmitting extremely high torque. Quick release mechanism: releasing sockets at the push of the button. Optimum surface protection: twice nickel plated then chromed in matt finish. Non-detachable handle made from oil and acid-resistant TPR (thermoplastic rubber) with practical hole for hanging up.

**The PROXXON driver system:**



The driving force is applied to the flanks, not the corners. This ensures high power transmission without damaging the corners of the nut or bolt.


**Screwdriver bits:**



With CrV socket 1. The drive bits are all an optimum combination of chrome-silicon-manganese-molybdenum steel 2.

**All bits and accessories are forged using 31CrV steel.**

High carbon content to ensure consistent hardness. 3  
Deep, uniform forging is fully guaranteed on the hex. drive side 4 to ensure that protruding studs do not present a problem. Thin-wall construction 5 for better access while maintaining strength for heavy work. Lead-in chamfer allows socket to slide over nuts easily. Machined fits on drive square 6 allow ratchet to arrest properly. Beginning with the 19mm size the outer diameter 7 of the sockets is reduced on the drive square end for improved handling 8. Optimum surface protection: Double nickel-plating and single matt-finished chrome-plating.



**Quality at its best:**

Highest quality, exceeds DIN/ISO requirements for hardness and maximum torque. Individual size tolerances are all well within the prescribed norms.



Socket sizes easy to read due to laser marking!

**2 year guarantee** For full professional use!  
Sockets and drive elements carry an additional **25 year guarantee** against faulty material and workmanship.

**Socket sets in sturdy, powder-coated steel cases. Made from chrome vanadium**

**steel 31 CrV 3. 100,000fold workshop proven classics.**

**PROXXON**

**INDUSTRIAL**

**DIN  
ISO**

Highest quality, exceeds DIN/ISO requirements for hardness and maximum torque. Individual size tolerances are all well within the prescribed norms.

**2 year guarantee**

For full professional use!

Sockets and drive elements carry an additional **25 year guarantee** against faulty material and workmanship.

For socket sets our test mechanics prefer steel cases: They are sturdy and preminently compact – a lot of tools, clearly arranged, requiring small space.

A chart for threads from M 1.6 – M 24 with related tightening torque is durably fixed inside the lid.



With distortion-free, indestructible trays of injected POLYPROPYLENE. Oil and acid resistant and easy to clean. With easy-to-read and durable marking of all socket sizes!

**29-piece socket set for powerful mechanical work.  
With 1/2" ratchet.**

Sockets from 8 – 34mm (the latter for M 22 according to the new ISO standard). Deep sockets in sizes 13 – 17 and 19mm for protruding bolts. Spark plug sockets 16 and 21mm.  
[See photo for full contents.](#)

**NO 23 000**



**27-piece automotive socket set with 1/4" and 1/2" ratchets**

Suitable for all common sizes between 6mm and 32mm. Also contains 16 and 21 mm spark plug sockets.

[See photo for full contents.](#)

**NO 23 020**



## Hands-on tools: Intelligent selection to suit fine mechanics to

## heavy duty projects!



### 56-piece set with 1/4" and 1/2" ratchets

Contains sockets from 4mm to 32mm and 16/21mm spark plug sockets, screwdriver bits with square drive for slotted, Phillips, TX (with frontal hole) and Allen sockets and 1.25 – 1.5 – 2 – 2.5 and 3mm angled Allen keys.

[See photo for full contents.](#)

**NO 23 040**



### 24-piece TX socket set

This set contains 1/4" drive (6.3mm) TX sockets in sizes TX8 to TX30 (with frontal hole) and external TX sizes E4 to E10 (all suitable for tightening torques up to 25Nm), 1/2" drive (12.5mm) TX sockets in sizes TX40 – 60 and external TX E12 to E20 (for tightening torques from 25 to 135Nm) and three offset TX spanners – the TX6, 8 and 10.

[See photo for full contents.](#)

**NO 23 102**



### 29-piece Specialty TX socket and TX socket bit set.

#### TTX-sockets for 1/4"-square drive (6.3mm).

For tightening torques up to 10 Nm: TTX 10 – 30. TX bit sockets in sizes E 4 – 5 – 6 – 8 and 10.

**For 1/2"-square drive (12.5mm).** For tightening torques from 25 to 135Nm: TX sockets in sizes 30 – 60 (short version: 55mm) and sizes 40 – 60 (long version: 100mm). TX bit sockets in sizes E 12 – 20.

**NO 23 103**



### 18-piece special set for Allen screws

**For 1/4" square drive (6.3mm)** and tightening torques up to 25Nm. Sizes 2 – 6mm.

**For 1/2" square drive (12.5mm)** and tightening torques from 25 – 210Nm: sizes 6 – 14mm (short version 55mm) and sizes 5 – 12mm (long version 100mm).

[See photo for full contents.](#)

**NO 23 100**



### 18-piece special set for XZN multi-toothed screws

For motor (cylinder head), drive shafts, rear axles. Includes 1/2" square drive. Screwdriver bits 5 – 14mm in normal version (55mm) and 6 – 14mm in extra-long version (100mm). Also includes outside double-hexagon inserts 9 – 21mm.

**NO 23 296**

**With clearly readable sizes due**

**to laser marking.**

Screwdriver handle with 1/4" square drive. 1/4" rear end connector to fit a ratchet or a T-bar.



**36-piece precision engineer's set with 1/4" ratchet**

Includes 4 – 13mm sockets, screwdriver bits with square drive for slotted, Phillips, TX (with frontal hole) and Allen sockets as well as 1.25 – 1.5 – 2 – 2.5 and 3mm angled Allen keys. [See photo for full contents.](#)


**NO 23 080**

**39-piece screwdriver set with 1/4" ratchet and magnetic holder**

For use with a drilling machine: 4 – 14mm sockets 1/4" drive (6.3mm). Includes 16 high quality alloy Allen key bits and adapters for male hex and square bits (magnet to socket adapter) and female hex and square bits (ratchet to screwdriver bit adapter) and 1.25 – 1.5 – 2 – 2.5 and 3mm angled Allen keys. [See photo for full contents.](#)

**NO 23 070**

**32-piece precision engineer's socket set with 1/4" MICRO compact ratchet and sockets with strong magnetic inserts.**

 Sockets from 5 – 13mm. In addition one each extension 50, 100 and 150mm: Nuts and screws are held securely even when working in tubes or pipes. 17 standard bits (25mm) made of high alloy special steel. Also includes hexagon/square female adapter. [See photo for full contents.](#)

**NO 23 078**

**24-piece compact socket set with 3/8" ratchet**

For 6 – 24mm. Including spark plug sockets 16 – 18 and 21mm. [See photo for full contents.](#)

**NO 23 110**

**65-piece super compact socket set with 3/8" ratchet**

Sockets from 6 – 24mm. Deep sockets for protruding bolts 10 – 13 – 15 and 17mm. Spark plug sockets 14 – 16 – 18 and 19mm. Screwdriver bits with square drive for HX, TX and XZN screws. 8 angled keys: HX 1.25 – 1.5 – 2 – 2.5 and 3mm as well as TX 6 – 8 and 10. [See photo for full contents.](#)

**NO 23 112**





Six popular socket sets in compact plastic cases.


Solid, with sturdy tray and snap-lock.

PROXXON

INDUSTRIAL



Composition and design copyright by PROXXON.



65-piece complete set with 1/4" and 1/2" baton ratchets.

With 34mm socket (according to new ISO standard for M 22).

This 65 piece set offers sockets from 4 to 34mm, as well as 16 and 21mm spark plug sockets. Screwdriver bits with square drive for slotted, Phillips, TX (with frontal hole) and Allen sockets. Angled Allen keys 1.25 – 1.5 – 2 – 2.5 and 3mm. Four extensions, one screwdriver handle with square drive, two universal joints.

[See photo for full contents.](#)

**NO 23 286**

65-piece complete set for imperial sizes with 1/4" and 1/2" baton ratchets



Sockets from 5/32" – 1 3/8". Spark plug sockets 5/8" and 13/16". Screwdriver bits with square drive for slotted, Phillips, TX (with frontal hole) and Allen screws. Five angled Allen keys from 0.05" to 1/8". Four extensions. Two universal joints. Screwdriver handle with square drive.

[See photo for full contents.](#)



**NO 23 294**

For imperial screw sizes from 5/32" to 1 3/8".

47-piece compact set with 3/8" baton ratchet




This 47 piece set offers sockets from 6 – 24mm. Deep sockets 10 – 17mm for protruding bolts. Spark plug sockets for 14, 16, 18 and 21mm. Screwdriver bits with square drive for Allen screws 4 – 10mm and TX screws (20 – 45). Two extensions. Universal joint. Five angled Allen keys 1.25 – 1.5 – 2 – 2.5 and 3mm.

[See photo for full contents.](#)

**NO 23 282**

Including the robust and fine-toothed baton ratchet for powerful use.

Quick-release mechanism at the push of a button.



**2 year guarantee**

**For full professional use!**

Sockets and drive elements carry an additional **25 year guarantee** against faulty material and workmanship.

Asymmetrical shape improves view when attaching to nut or bolt head.

**DIN**  
**ISO**



Perfect toothing and reliable reverse mechanism. Several of the 72 teeth engage simultaneously for transferring also high torques.



**20-piece specialty socket set with deep sockets**



**With 1/4" square drive (6.3mm)**

for torques under 25Nm: hexagonal sockets for 4 – 5 – 5.5 – 6 – 7 – 8 – 9 – 10 – 11 and 12mm.

**With 1/2" square drive (12.5mm)**

for torques over 25Nm: 13 – 14 – 15 – 16 – 17 – 18 – 19 – 20 – 21 – 22 and 24mm. All parts are matt chrome-plated and are clearly marked with sizes.

See photo for full contents.

**NO 23 292**

**50-piece precision engineer's set with 1/4" baton ratchet**



This set includes sockets from 4 – 13mm, deep sockets from 6 – 10mm for protruding bolts and screwdriver bits with square drive for slotted, Phillips, Allen and TX (with frontal hole) screws. It also has external TX sizes E4 – 10, universal joint, 2 extensions, screwdriver handle with square drive and 1.25 – 1.5 – 2 – 2.5 and 3mm angled Allen keys.

See photo for full contents.

**NO 23 280**

**42-piece specialty set for TX and Allen screws**



**With 1/4" square drive (6.3mm)**

(for tightening torques up to 25Nm): Screwdriver bits for Allen screws sizes 2 – 6mm and screwdriver bits TX8 – TX40 (with frontal hole) as well as external TX E4 to E10.

**With 1/2" square drive (12.5mm)**

(for tightening torques from 25 – 210Nm): Screwdriver bits for Allen screws sizes 7 – 14mm (short version, 55mm) and sizes 6 – 12mm (long version, 100mm), for TX screws sizes 45 – 60 (short version) and for external TX sizes E12 to E20. Includes 5 angled head Allen keys in 1.25 – 1.5 – 2 – 2.5 and 3mm.

See photo at left for full contents.

**NO 23 290**




**NO 23 650: For 25 years this has been a classic among toolboxes world-wide.**

**Featuring first class assembly tools. Now in its 7th generation.**

**PROXXON**  
**INDUSTRIAL**

**DIN**  
**ISO**



*SlimLine* - combination spanners from 6 – 19mm. 14 spanners (with sizes 16 and 18, as per ISO for screws M 10 and M 12).

1/2"-sockets: 14 instead of 10 sockets (11, 16, 18 and 21mm have been added).

Ball-peen hammer (300g), with graphite handle for superior vibration damping, handy non-slip grip.

The selection of 16 and 21mm spark plug sockets was enlarged joining size 18mm, which has become increasingly important.

Reversible ratchet with release mechanism.

Water pump pliers with box joint.

8-piece pocket Allen key (HX 1.5 – 8mm) and TX key (TX 9 – 40) sets.

*FLEX-DOT*-flat-bladed screwdrivers in sizes 3 – 5.5 and 8mm. Phillips (PH) screwdrivers in sizes 1 and 2.

**KNIPEX**  
High quality combination pliers of CrV steel.

### **Automotive and universal tool set**

Combination spanners from 6 – 19mm. 1/2" sockets from 8 – 24mm. Spark plug sockets 16 – 18 and 21mm. Automotive headlight tester with cord and crocodile clip (for car electrical systems). [See photo for full contents](#). Each tool has its proper place – organized forever!

**NO 23 650**



*PROXXON design by Helmut Scholz: A high-quality POLYPROPYLENE tool case without frills. Treadable, shock-proof, fuel and acid resistant.*



## Cordless screwdriver ASD (3.6V) Effortless screwing - easy on your wrists.

For 1/4"-standard bits. Including USB-port and charger.




**Quick electrically supported screwing and precise tightening by hand up to 5Nm.**



**Note:**  
2.1A USB-adaptor (included) charges the battery in approx. one hour. For use on all USB ports, e.g. in the car on the way to the next job.



### 25mm

-  PH 0 – 1 – 2
-  HX 3 – 4 – 5
-  TX 10 – 15 – 20

### 80mm

-  PH 1
-  FD 3 – 5

**Cordless screwdriver for 1/4" standard bits. Ideal for threaded bolts (e.g. metric threads acc. to ISO).**

Electric drive for quick, effortless screwing. Final, precise fastening "by hand" up to 5 Nm due to self-locking mechanism. Bolt and bit are safely held by a strong magnet. A tool change from the cordless screwdriver to a conventional one is not necessary. The battery with 2Ah capacity provides enough energy also for bigger projects and

longer operation. Including 12 standard bits of industrial quality (3 in extra-long version).

**Technical data:**

Speed: 250/min. Max torque 1,8 Nm. Li-ion cell: 2 Ah (integrated). Length 180 mm. Weight: approx. 200 g.

**NO 22 295**

## Universal and oil siphoning pump AP 12. Perfect for effortless oil changes in 2 – 3 minutes.

Easily pumps motor, diesel and heating oil. Pump capacity approx. 250l/hr (with 1/2" feed hose). When changing oil with the wand, approx. 3l/min (40 °C oil temperature). 200cm long feed line with crocodile clips for battery terminals. Feed and supply side connecting pieces for 1/2" hoses. Includes a wand (approx. 800mm long, outer diameter 6mm) for the oil dipstick shaft, permanently fitted with a reinforced hose. A 1/2" transparent outlet hose, approx. 150cm long, is supplied. Housing of glass fibre reinforced POLYAMIDE, approx. 120 x 90 x 90mm. Approx. weight 1.4kg.

**NO 25 262**



**Note:**

The wand fits all vehicles with a 6mm oil dipstick s

# The L-BOXX-system: Organisation and safety in storage and transport for professional craftsmen.

**DIN**  
**ISO**

**69 high quality tools placed ready to hand!**

**L-BOXX® -system L 102 (extremely flat!)**



Store neatly, quickly and smoothly and transport safely. Compatible with numerous in-vehicle-equipment-systems of well-known brands. Outer dimensions: 445 x 358 x 118mm. Tool panel pouch and foam inlay made of high quality materials.

## **Craftman's universal tool set in proven L-BOXX-system**


14 sockets 1/2" (12.5mm) 8 – 24mm, standard ratchet 1/2", universal joint, extensions 125 and 250mm, 4 deep sockets 10 – 19mm, 15 SlimLine combination spanners 6 – 21mm, MicroSpeeder ratchet spanners 10 x 13 and 17 x 19mm, 5 slot screwdrivers 3 – 6.5mm,

Phillips PH 1 and PH 2, voltage tester, pocket key sets HX and TX (9-piece each), KNIPEX combination pliers 180mm and KNIPEX water pump pliers 250mm, ball-peen hammer (300g) with graphite handle.  
**NO 23 660**

**1/4"**  
**6.3mm**

**Ratchets, sockets and accessories for delicate projects.**


**All of chrome vanadium steel 31 CrV 3.**



**Baton ratchet 1/4". Our sturdy ratchet!**

Fine tooth drive: Several of the 72 teeth engage simultaneously for transferring high torques. Reverse lever for ratcheting direction. Quick-release button for ejecting sockets. Head and shaft forged from one CrV steel billet. Double nickel plated with matt chrome plated finish. Grip of oil and acid-resistant TPR (thermoplastic rubber) with practical hole for hanging up.

**NO 23 330**



**Ratchet 2000 1/4". Our extremely flat ratchet!**

Precision ratchet drive for long service life and high torque transmission. Reverse lever for ratcheting direction. Quick-release button for releasing sockets instantly. With handy, soft-touch Dupont HYTREL grip and practical hole for hanging up.

**NO 23 170**



**Standard ratchet 1/4". Proven many times over!**

With reverse feature directly on ratchet mechanism. Several of the 52 teeth engage simultaneously for transferring extremely high torques. Quick-release button for ejecting sockets instantly. Head and shaft forged from one piece of CrV steel. Double nickel plated with matt chrome plated finish. Grip of oil and acid-resistant TPR (thermoplastic rubber) with practical hole for hanging up.


**NO 23 092**



**Standard ratchet 1/4". With flexible head!**

Head can be locked in 6 positions through 90° at the push of a button. Ideal where space is at a premium. Otherwise same as standard ratchet 1/4" (NO 23 092) described above.

**NO 23 074**




**ROTARY-ratchet 1/4". With additional offset-screwdriver function.**

The rotating grip design allows for pre-tensioning in abutment to one side. Then a few millimetres of standard ratcheting action is sufficient for loosening or tightening. Fine tooth drive (52 teeth) with convenient drive direction switch. Sockets are held firmly in place until the quick release button is activated.

**NO 23 082**


**MICRO ratchets for tricky work and where space is tight! For screwing in the engine compartment, under the dashboard or on the airbag, for working on the air conditioning system, inside the car body, the sun roof etc.**



**MICRO compact ratchet with 1/4" square drive.**

With extremely slim head (23 x 12mm). Fine-toothing: Many of the 72 teeth engage simultaneously for transferring extremely high torques. Reverse lever for ratcheting direction. Release mechanism: unlocking the sockets at the push of a button. Forged from CrV steel, double nickel plated with matt chrome plated finish. Grip of oil- and acid-resistant TPR (Thermoplastic Rubber). Total length 120mm. With practical hole for hanging up.

**NO 23 160**



**MICRO bit ratchet with 1/4" hexagonal adapter**

For 1/4" standard bits. With magnetic insert. Distance between reverse lever and bit end only 30mm. Technology and application identical to the 1/4" MICRO compact ratchet described above.

**NO 23 158**





**1/4"**  
**6.3mm**

**Sockets and accessories for delicate projects.**

**All of chrome vanadium steel 31 CrV 3.**

|   |   | Size  | Part No  |
|---|---|---|--|
|     | <b>1/4" sliding T-bar</b>   | 100mm   | 23 704   |
|     | <b>1/4" extension</b>   | 50mm<br>100mm<br>150mm  | 23 707<br>23 708<br>23 705   |
|     | <b>1/4" flexible extension</b>  | 150mm   | 23 706   |
|    | <b>1/4" universal joint</b>   |   | 23 709   |
|    | <b>1/4" magnetic holder for hexagonal bits</b><br>with male and female HX shafts. Ideal for working with electric screwdrivers and drills.  |   | 23 703   |
|  | <b>1/4" drill adapter</b><br>for 1/4"-sockets   |   | 23 700   |
|   | <b>Combination-Adaptor with 1/4"-square and 1/4"-hexagon standard bits receptacle</b><br>For use with 1/4" sockets and 1/4" hexagon standard bits (6.3mm) on cordless screwdrivers and electric drilling machines. Choice between the two options simply by sliding the sleeve. |   | 23 783   |
|   | <b>1/4" drive screwdriver handle with 1/4" connector at rear end</b> , 140mm long   | 140mm   | 23 702   |
|   | <b>1/4" adapter for hexagonal bits</b> (DIN 3126) female square to female hexagon <b>1</b>  |   | 23 780   |
|   | <b>1/4" adapter</b> 1/4" female square to 3/8" male square <b>2</b>   |   | 23 782   |
|   | <b>1/4" adapter</b> with 1/4" male square to 1/4" male hexagon. <b>3</b>  |   | 23 701   |
|  | <b>1/4" sockets</b><br>Made of CrV steel. Total length 25mm.  | 4mm<br>4.5mm<br>5mm<br>5.5mm<br>6mm<br>6.5mm<br>7mm<br>8mm<br>9mm<br>10mm<br>11mm<br>12mm<br>13mm<br>14mm | 23 710<br>23 711<br>23 712<br>23 713<br>23 714<br>23 715<br>23 716<br>23 718<br>23 720<br>23 722<br>23 724<br>23 726<br>23 728<br>23 729 |



**1/4" deep sockets**  
 For long protruding bolts.  
 Made of CrV steel. Total length 50mm.

| Size  | Part No |
|-------|---------|
| 4mm   | 23 767  |
| 5mm   | 23 768  |
| 5.5mm | 23 769  |
| 6mm   | 23 770  |
| 7mm   | 23 772  |
| 8mm   | 23 774  |
| 9mm   | 23 776  |
| 10mm  | 23 778  |
| 11mm  | 23 777  |
| 12mm  | 23 775  |
| 13mm  | 23 779  |
| 14mm  | 23 773  |



**1/4" Allen socket bits, 33mm**  
 Head made of chrome-silicon-manganese-molybdenum steel.  
 Socket CrV steel.

|          |        |
|----------|--------|
| HX 2mm   | 23 744 |
| HX 2.5mm | 23 746 |
| HX 3mm   | 23 743 |
| HX 4mm   | 23 745 |
| HX 5mm   | 23 747 |
| HX 6mm   | 23 749 |
| HX 8mm   | 23 751 |



**1/4" female TX (TTX) sockets**  
 Made of CrV steel. Total length 25mm.

|      |        |
|------|--------|
| E 4  | 23 788 |
| E 5  | 23 790 |
| E 6  | 23 792 |
| E 7  | 23 793 |
| E 8  | 23 794 |
| E 10 | 23 796 |



**1/4" TTX screwdriver bits, 33mm (with frontal hole)**  
 Head made of chrome-silicon-manganese-molybdenum steel. Socket CrV steel.

|        |        |
|--------|--------|
| TTX 5  | 23 755 |
| TTX 6  | 23 752 |
| TTX 8  | 23 753 |
| TTX 10 | 23 754 |
| TTX 15 | 23 756 |
| TTX 20 | 23 758 |
| TTX 25 | 23 760 |
| TTX 27 | 23 761 |
| TTX 30 | 23 762 |
| TTX 40 | 23 764 |



**1/4" flat-blade screwdriver bits, 33mm**  
 Made of chrome-silicon-manganese-molybdenum steel. Socket CrV steel.

|          |        |
|----------|--------|
| FD 4mm   | 23 737 |
| FD 5.5mm | 23 739 |
| FD 7mm   | 23 741 |
| FD 8mm   | 23 742 |

**1/4" Phillips screwdriver bits, 33mm**  
 Made of chrome-silicon-manganese-molybdenum steel. Socket CrV steel.

|      |        |
|------|--------|
| PH 1 | 23 730 |
| PH 2 | 23 731 |
| PH 3 | 23 732 |




**1/4" Pozidriv screwdriver bits, 33mm**  
 Made of chrome-silicon-manganese-molybdenum steel. Socket CrV steel.

|      |        |
|------|--------|
| PZ 1 | 23 733 |
| PZ 2 | 23 735 |

**3/8"**  
10mm

**Ratchets, sockets and accessories, handy and compact**


**for every user! 31 CrV 3 chrome-vanadium steel.**



**Baton ratchet 3/8". Our sturdy ratchet!**

Fine tooth drive: Several of the 72 teeth engage simultaneously for transferring maximum torque. Reverse lever for ratcheting direction. Quick-release button for releasing sockets instantly. Head and shaft forged from one piece of CrV steel. Double nickel-plated with matt chrome-plated finish. Grip of oil and acid-resistant TPR (thermoplastic rubber) with practical hole for hanging up.


**NO 23 332**



**Ratchet 2000 3/8". Our extremely flexible ratchet!**

Precision ratchet drive with 44 teeth for long service life and high torque. Reverse lever for ratcheting direction. Quick-release button for releasing sockets instantly. With handy, soft-touch Dupont HYTREL grip and practical hole for hanging up.


**NO 23 180**



**Standard ratchet 3/8". Proven many times over!**

With reverse feature directly on ratchet mechanism. Several of the 52 teeth engage simultaneously for transferring extremely high torque. Quick-release button for releasing sockets instantly. Head and shaft forged from one piece of CrV steel. Double nickel-plated with matt chrome-plated finish. Grip of oil and acid-resistant TPR (thermoplastic rubber) with practical hole for hanging up.


**NO 23 094**



**MICRO compact ratchet 3/8". With extremely slim ratchet head!**

Fine tooth drive: Several of the 72 teeth engage simultaneously transferring extremely high torques. Reverse lever for ratcheting direction. Release mechanism: unlocking the sockets at the push of a button. Forged from CrV-steel, double nickel plated with matt chrome plated finish. Grip of oil- and acid-resistant TPR (Thermoplastic Rubber).

**NO 23 162**



**ROTARY-ratchet 3/8". With additional offset-screwdriver function.**

The rotating grip design allows for pre-tensioning in abutment to one side. Then a few millimetres of standard ratcheting action is sufficient for loosening or tightening. Fine tooth drive (52 teeth) with convenient drive direction switch. Sockets are held firmly in place until the quick release button is activated.

**NO 23 083**



**3/8" extension with slide**

Adapter to 3/8" male square and 1/2" female square.

| Size  | Part No |
|-------|---------|
| 200mm | 23 558  |



**3/8" extension**

|       |        |
|-------|--------|
| 75mm  | 23 554 |
| 150mm | 23 556 |



**3/8" universal joint**

23 560



**3/8" adapter**

3/8" female to 1/4" male square (slide for 1/4" extension).

23 564

**3/8" adapter**

3/8" female square drive to male 1/2" drive (slide for 1/2" extension).

23 566



**3/8" drill adapter**

for 3/8"-sockets

23 562



**3/8" spark plug socket**

With TPR (thermoplastic rubber) insert for holding spark plugs. Length 64mm.

|      |        |
|------|--------|
| 16mm | 23 550 |
| 18mm | 23 551 |

**As above**, length 70mm

|      |        |
|------|--------|
| 19mm | 23 541 |
| 21mm | 23 552 |



**3/8" spark plug socket**

HX and double HX (BI-HX) spark plugs. Slim design (Ø 20mm). With TPR (thermoplastic rubber) insert for holding spark plugs. Length 64mm.

14mm 23 553





**3/8" sockets**  
Made of CrV steel.

| Size | Part No |
|------|---------|
| 6mm  | 23 500  |
| 7mm  | 23 502  |
| 8mm  | 23 504  |
| 9mm  | 23 506  |
| 10mm | 23 508  |
| 11mm | 23 510  |
| 12mm | 23 512  |
| 13mm | 23 514  |
| 14mm | 23 516  |
| 15mm | 23 518  |
| 16mm | 23 520  |
| 17mm | 23 522  |
| 18mm | 23 523  |
| 19mm | 23 524  |
| 21mm | 23 526  |
| 22mm | 23 528  |
| 24mm | 23 530  |



**3/8" deep sockets**  
for protruding bolts.  
Made of CrV steel.  
Total length 46mm.

|      |        |
|------|--------|
| 8mm  | 23 532 |
| 9mm  | 23 534 |
| 10mm | 23 536 |
| 11mm | 23 538 |
| 12mm | 23 540 |
| 13mm | 23 542 |
| 14mm | 23 543 |

As above, total length 64mm.

|      |        |
|------|--------|
| 15mm | 23 544 |
| 17mm | 23 546 |
| 18mm | 23 548 |
| 19mm | 23 549 |
| 22mm | 23 545 |
| 24mm | 23 547 |



**3/8" Allen socket bits, 50mm**  
Allen key made of chrome-silicon-  
manganese-molybdenum steel.  
Socket CrV steel.

|         |        |
|---------|--------|
| HX 4mm  | 23 575 |
| HX 5mm  | 23 576 |
| HX 6mm  | 23 578 |
| HX 7mm  | 23 579 |
| HX 8mm  | 23 580 |
| HX 9mm  | 23 577 |
| HX 10mm | 23 581 |
| HX 11mm | 23 573 |



**3/8" external TX socket**  
Made of CrV steel.

|      |        |
|------|--------|
| E 6  | 23 612 |
| E 7  | 23 613 |
| E 8  | 23 614 |
| E 10 | 23 616 |
| E 12 | 23 618 |
| E 14 | 23 620 |
| E 18 | 23 624 |



**3/8" TX socket bits, 50mm**  
Head made of chrome-silicon-manganese-  
molybdenum steel. Socket CrV steel.

|       |        |
|-------|--------|
| TX 10 | 23 583 |
| TX 15 | 23 582 |
| TX 20 | 23 584 |
| TX 25 | 23 585 |
| TX 27 | 23 586 |
| TX 30 | 23 587 |
| TX 40 | 23 588 |
| TX 45 | 23 589 |
| TX 50 | 23 590 |



**3/8" flat-blade screwdriver bits, 50mm**  
Bit made of chrome-silicon-manganese-  
molybdenum steel. Socket CrV steel.

|          |        |
|----------|--------|
| FD 4mm   | 23 591 |
| FD 5.5mm | 23 592 |
| FD 8mm   | 23 593 |

**3/8" Phillips screwdriver bits, 50mm**  
Bit made of chrome-silicon-manganese-  
molybdenum steel. Socket CrV steel.

|      |        |
|------|--------|
| PH 1 | 23 594 |
| PH 2 | 23 595 |
| PH 3 | 23 596 |




**3/8" spline socket bits, 50mm**  
for XZN bolts. Bit made of chrome-silicon-  
manganese-molybdenum steel. Socket CrV steel.

|       |        |
|-------|--------|
| VZ 5  | 23 628 |
| VZ 6  | 23 629 |
| VZ 8  | 23 631 |
| VZ 10 | 23 633 |

**1/2"**  
12.5mm

**Ratchets, sockets and accessories for the most**


**demanding situations. 31 CrV 3 chrome-vanadium steel.**



**Baton ratchet 1/2". Our sturdy ratchet!**

Fine tooth drive: Several of the 72 teeth engage simultaneously for transferring maximum torque. Reverse lever for ratcheting direction. Quick-release button for releasing sockets instantly. Head and shaft forged from one piece of CrV steel. Double nickel-plated with matt chrome-plated finish. Grip of oil and acid-resistant TPR (thermoplastic rubber) with practical hole for hanging up.


**NO 23 334**



**Ratchet 2000 1/2". Our extremely flexible ratchet!**

Precision ratchet drive with 44 teeth for long service life and high torque transmission. Reverse lever for ratcheting direction. Quick-release button for releasing sockets instantly. With handy, soft-touch Dupont HYTREL grip and practical hole for hanging up.


**NO 23 190**



**Standard ratchet 1/2". Proven many times over!**

With reverse feature directly on ratchet mechanism. Several of the 52 teeth engage simultaneously for transferring extremely high torque. Quick-release button for releasing sockets instantly. Head and shaft forged from one piece of CrV steel. Double nickel-plated with matt chrome-plated finish. Grip of oil and acid-resistant TPR (thermoplastic rubber) with practical hole for hanging up.


**NO 23 096**



**MICRO compact ratchet 1/2". With extremely slim ratchet head!**

Fine tooth drive: Several of the 72 teeth engage simultaneously transferring extremely high torques. Reverse lever for ratcheting direction. Release mechanism: unlocking the sockets at the push of a button. Forged from CrV-steel, double nickel plated with matt chrome plated finish. Grip of oil- and acid-resistant TPR (Thermoplastic Rubber).

**NO 23 164**



**ROTARY-ratchet 1/2". With additional offset-screwdriver function.**

The rotating grip design allows for pre-tensioning in abutment to one side. Then a few millimetres of standard ratcheting action is sufficient for loosening or tightening. Fine tooth drive (52 teeth) with convenient drive direction switch. Sockets are held firmly in place until the quick release button is activated.

**NO 23 084**



**Extra long lever with universal joint and ratchet mechanism**

For effortless loosening of tightly locked screws. Robust ratchet mechanism (60 teeth) with knurled ring offering reverse operation. Grip made of oil and acid resistant TPR (Thermoplastic Rubber).

**NO 23 090** Total length 43cm



**1/2" extension with slide**  
With adapter from 1/2" male to 3/8" female.

Size Part No

250mm 23 457



**1/2" extension**  
64mm 23 452  
125mm 23 454  
250mm 23 456



**1/2" female to 3/8" male square drive**  
(sliding part for 3/8" extension) 23 458



**1/2" universal joint** 23 450



**1/2" drill adapter**  
for 1/2" sockets 23 460

|   |   | Size    | Part No |
|---|---|---------|---------|
|    | <b>1/2" spark plug sockets</b><br>With TPR (thermoplastic rubber) insert for holding spark plugs. Length 65mm.<br><b>As above</b> , length 70mm | 16mm    | 23 442  |
|   |   | 18mm    | 23 443  |
|   |   | 19mm    | 23 445  |
|   |   | 21mm    | 23 444  |
|    | <b>1/2" spark plug sockets</b><br>With TPR (thermoplastic rubber) insert for holding spark plugs. Length 65mm.<br><b>As above</b> , length 70mm | 16mm    | 23 392  |
|   |   | 18mm    | 23 394  |
|   |   | 19mm    | 23 395  |
|   |   | 21mm    | 23 396  |
|    | <b>1/2" sockets</b><br>With reduced drive and diameter (19mm and over).<br>Made of CrV steel.   | 8mm     | 23 400  |
|   |   | 9mm     | 23 402  |
|   |   | 10mm    | 23 404  |
|   |   | 11mm    | 23 406  |
|   |   | 12mm    | 23 408  |
|   |   | 13mm    | 23 410  |
|   |   | 14mm    | 23 412  |
|   |   | 15mm    | 23 414  |
|   |   | 16mm    | 23 415  |
|   |   | 17mm    | 23 416  |
|   |   | 18mm    | 23 417  |
|   |   | 19mm    | 23 418  |
|   |   | 20mm    | 23 419  |
|   |   | 21mm    | 23 420  |
|   |   | 22mm    | 23 422  |
|   |   | 23mm    | 23 423  |
|   |   | 24mm    | 23 424  |
|   |   | 27mm    | 23 426  |
|   |   | 30mm    | 23 428  |
|   |   | 32mm    | 23 430  |
| 34mm  | 23 431  |         |         |
| 36mm  | 23 429  |         |         |
|  | <b>1/2" deep sockets</b><br>For protruding bolts.<br>Made of CrV steel. Total length 79mm.  | 10mm    | 23 355  |
|   |   | 11mm    | 23 356  |
|   |   | 12mm    | 23 357  |
|   |   | 13mm    | 23 358  |
|   |   | 14mm    | 23 359  |
|   |   | 15mm    | 23 360  |
|   |   | 16mm    | 23 361  |
|   |   | 17mm    | 23 362  |
|   |   | 18mm    | 23 363  |
|   |   | 19mm    | 23 364  |
|   |   | 21mm    | 23 365  |
|   |   | 22mm    | 23 366  |
| 24mm  | 23 367  |         |         |
|  | <b>1/2" flat-blade screwdriver bits, 55mm</b><br>Chrome-silicon-manganese-molybdenum steel.<br>CrV steel socket.                                | FD 8mm  | 23 462  |
|   |   | FD 10mm | 23 464  |
|  | <b>1/2" Allen socket bits, 55mm</b><br>Allen key made of chrome-silicon- manganese-molybdenum steel.<br>Socket CrV steel .                      | HX 5mm  | 23 476  |
|   |   | HX 6mm  | 23 477  |
|   |   | HX 7mm  | 23 478  |
|   |   | HX 8mm  | 23 479  |
|   |   | HX 9mm  | 23 463  |
|   |   | HX 10mm | 23 480  |
|   |   | HX 11mm | 23 465  |
|   |   | HX 12mm | 23 481  |
| HX 14mm   | 23 482  |         |         |
|  | <b>1/2" Allen socket bits, 100mm</b><br>Allen key made of chrome-silicon-manganese-molybdenum steel.<br>Socket CrV steel.                       | HX 5mm  | 23 484  |
|   |   | HX 6mm  | 23 475  |
|   |   | HX 7mm  | 23 485  |
|   |   | HX 8mm  | 23 486  |
|   |   | HX 9mm  | 23 466  |
|   |   | HX 10mm | 23 487  |
|   |   | HX 11mm | 23 467  |
|   |   | HX 12mm | 23 483  |
| HX 14mm   | 23 468  |         |         |
| HX 17mm   | 23 471  |         |         |
| HX 19mm   | 23 473  |         |         |




**1/2"**  
12.5mm



**1/2" external TX socket**  
Made of CrV steel.

| Size | Part No |
|------|---------|
| E 10 | 23 380  |
| E 12 | 23 382  |
| E 14 | 23 384  |
| E 16 | 23 386  |
| E 18 | 23 388  |
| E 20 | 23 390  |
| E 24 | 23 391  |



**1/2" TX socket bits, 55mm**  
Head made of chrome-silicon-manganese-molybdenum steel. Socket CrV steel.

|       |        |
|-------|--------|
| TX 20 | 23 488 |
| TX 25 | 23 489 |
| TX 27 | 23 490 |
| TX 30 | 23 491 |
| TX 40 | 23 492 |
| TX 45 | 23 493 |
| TX 50 | 23 494 |
| TX 55 | 23 446 |
| TX 60 | 23 447 |
| TX 70 | 23 448 |

**1/2" TX socket bits, 100mm**  
Head made of chrome-silicon-manganese-molybdenum steel. Socket CrV steel.

|       |        |
|-------|--------|
| TX 40 | 23 495 |
| TX 45 | 23 496 |
| TX 50 | 23 497 |
| TX 55 | 23 498 |
| TX 60 | 23 499 |



**1/2" spline socket bits, 55mm**  
for XZN bolts. Bit made of chrome-silicon-manganese-molybdenum steel. Socket CrV steel.

|       |        |
|-------|--------|
| VZ 5  | 23 318 |
| VZ 6  | 23 319 |
| VZ 8  | 23 321 |
| VZ 10 | 23 323 |
| VZ 12 | 23 325 |
| VZ 14 | 23 327 |
| VZ 16 | 23 328 |
| VZ 18 | 23 329 |

**1/2" spline socket bits, 100mm**  
for XZN bolts. Bit made of chrome-silicon-manganese-molybdenum steel. Socket CrV steel.

|       |        |
|-------|--------|
| VZ 6  | 23 370 |
| VZ 8  | 23 371 |
| VZ 9  | 23 376 |
| VZ 10 | 23 372 |
| VZ 12 | 23 373 |
| VZ 14 | 23 374 |
| VZ 16 | 23 377 |
| VZ 18 | 23 378 |



**1/2" sockets for XZN-screws, 12-pt**  
Made of CrV steel.

|      |        |
|------|--------|
| 9mm  | 23 304 |
| 10mm | 23 305 |
| 12mm | 23 307 |
| 18mm | 23 311 |
| 19mm | 23 312 |
| 21mm | 23 314 |

**3/4"**  
19mm

## Socket set with 3/4" square drive.

**14-piece socket set with 3/4" square drive.**  
**For lorries, tractors and other machinery.**

10 sockets from 22 – 50mm. 520mm ratchet (72 teeth) with quick-release button for releasing sockets instantly. Sliding T-bar (500mm). Each one extension of 200mm and 400mm.

**NO 23 300**



**Workshop special sets for long bolts and screws. With forged,**

**short tubular hexagon box spanners and externally gripping ratchet.**

**2 year  
guarantee**

For full professional use!



**14-piece special set 13 to 27mm**

With reversible ratchet, TPR (thermoplastic rubber) grip, 55mm extension (open construction as well) and adapter with 1/2" square (12.5mm). In robust steel box (powder coated) with strong plastic tray.

**NO 23 604**

**13-piece special set 5.5 to 14mm**

With reversible ratchet, TPR (thermoplastic rubber) grip, 55mm extension (open construction as well) and adapter with 1/4" (6.3mm) square. In robust steel box (powder coated) with strong plastic tray.

**NO 23 602**

**Adjustable wrenches forged from CrV steel. According to DIN 3117 / ISO 6787.**

Extra-long version with soft-finish skin-friendly handle made of oil and acid resistant TPR (thermoplastic rubber) with hanging hole. Slim head with ground jaws. Accurate control of flexible jaw with smooth-running adjustment via knurled screw. Easy to read millimetre scale for defining size across flats and measuring work pieces.

jaw width

|                  |        |        |
|------------------|--------|--------|
| <b>NO 23 990</b> | RG 200 | 24.5mm |
| <b>NO 23 992</b> | RG 250 | 29mm   |
| <b>NO 23 994</b> | RG 300 | 34mm   |



**IMPACT socket sets for wheel nuts. Sockets with plastic cover and plastic stop insert prevent aluminium wheel rims from damage. Now also available in extra long version (130mm).**

For use with pneumatic screwdrivers 1/2". Made of high alloy special steel for superior wear resistance and a maximum torque of 500Nm. One piece each 17 – 19 and 21mm in sturdy steel box (powder coated).

|                  |                     |       |
|------------------|---------------------|-------|
| <b>NO 23 938</b> | standard version,   | 85mm  |
| <b>NO 23 970</b> | extra long version, | 130mm |

**IMPACT sockets, individually. Standard length: 85mm.**

|                  |         |
|------------------|---------|
| <b>NO 23 962</b> | Size 17 |
| <b>NO 23 964</b> | Size 19 |
| <b>NO 23 966</b> | Size 21 |

**IMPACT sockets, individually. Extra long version: 130mm.**

|                  |         |
|------------------|---------|
| <b>NO 23 972</b> | Size 17 |
| <b>NO 23 974</b> | Size 19 |
| <b>NO 23 976</b> | Size 21 |



**MicroClick torque wrenches. Precision tools with high accuracy (tolerance of +/- 3%)**

**Including test certificate.**

PROXXON

INDUSTRIAL

**Ratchet mechanism with reversing lever for clockwise and anticlockwise rotation.  
Automatic quick release: Clearly audible and palpable click signal when selected torque**



Clearly legible analogue display for simple pre-selection of the desired torque.

Ergonomically shaped handle allows for automatically gripping it in a centric position. Important for obtaining an exact release torque.

Additional micro-scale for fine adjustment.

Simple pre-setting of the torque by turning the knurled ring at the end of the handle, fixing it by sliding it into position.



**Note:**  
IMPACT sockets for wheel nuts are featured on page 19!



Sturdy, oval steel shaft with rust-protective finish: double nickel and subsequent matt-finished chrome-plating.

**MC 320**

### **MicroClick MC 320. For 60 – 320Nm.**

With 1/2" square drive (12.5mm). Total length 610mm. Otherwise as described above.

**NO 23 354**

### **MicroClick MC 200. For 40 – 200Nm.**

With 1/2" square drive (12.5mm). Total length 530mm. Otherwise as described above.

**NO 23 353**

### **MicroClick MC 100. For 20 – 100Nm.**

With 3/8" square drive (10mm). Total length 430mm. Particularly suitable for motorcycles. Otherwise as described above.

**NO 23 351**

### **MicroClick MC 60. For 12 – 60Nm.**

With 3/8" square drive (10mm). Total length 370mm. Otherwise as described above.

**NO 23 350**

### **MicroClick MC 30. For 6 – 30Nm.**

With 1/4" square drive (6.3mm). Total length 335mm. Otherwise as described above.

**NO 23 349**



according to ISO 6789). Calibrated and inspected piece by piece.

is reached.



**MicroClick** torque wrenches are precision tools. They are packaged in a sturdy and practical plastic storage box.

Practical release mechanism: the socket is securely fixed and automatically released at the push of the button.



Reverse lever for clockwise and anticlockwise rotation.

MC 200

MC 100

MC 60

MC 30

and final inspection. With permanent laser-marked serial number identifying the product.



**Note:**

MicroClick torque screwdrivers MC 2 (0.4 to 2Nm), MC 5 (1 to 5Nm) und MC 10 (2 to 10Nm) as well as MicroClick torque wrench MC 15 (3 to 15Nm) are featured on page 23.

| mm    | HX        | INHX   | FM-TX     | M-TX     | XZN   | Nm <sup>1)</sup> |
|-------|-----------|--------|-----------|----------|-------|------------------|
| M 1,6 | SW 3,2    | HX 1,5 | TX 5      | -        | -     | 0,2              |
| M 2   | SW 4      | HX 1,5 | TX 6      | -        | -     | 0,35             |
| M 2,5 | SW 5      | HX 2   | TX 7; 8   | -        | -     | 0,8              |
| M 3   | SW 5,5    | HX 2,5 | TX 9; 10  | E 4      | -     | 1,3              |
| M 3,5 | SW 6      | HX 2,5 | TX 15     | E 4      | -     | 2                |
| M 4   | SW 7      | HX 3   | TX 20     | E 5; 6   | -     | 2,9              |
| M 5   | SW 8      | HX 4   | TX 25; 27 | E 6; 8   | -     | 6                |
| M 6   | SW 10     | HX 5   | TX 27; 30 | E 8; 10  | VZ 5  | 10,2             |
| M 7   | SW 11     | HX 5   | TX 40     | E 8; 10  | VZ 5  | 16               |
| M 8   | SW 13     | HX 6   | TX 45     | E 10; 12 | VZ 6  | 25               |
| M 10  | SW 16; 17 | HX 8   | TX 45; 50 | E 12; 14 | VZ 8  | 50               |
| M 12  | SW 18; 19 | HX 10  | TX 55     | E 14; 18 | VZ 10 | 86               |
| M 14  | SW 21; 22 | HX 12  | TX 60     | E 18; 20 | VZ 12 | 138              |
| M 16  | SW 24     | HX 14  | TX 70     | E 20     | VZ 14 | 215              |
| M 18  | SW 27     | HX 14  | TX 80     | E 24     | -     | 296              |
| M 20  | SW 30     | HX 17  | TX 90     | E 24     | -     | 420              |
| M 22  | SW 32; 34 | -      | -         | -        | -     | 573              |
| M 24  | SW 36     | HX 19  | -         | -        | -     | 725              |

<sup>1)</sup> Schraubenqualität 8.8; Gewindereizahl  $\mu=0,14$   
PROXXON S.A., LU-6868 Wecker

© Copyright by **PROXXON**


Tightening torques for bolt shanks with standard metric threads (DIN 13, Part 13) and head contact dimensions (DIN 912, 931, 934). The coefficient of friction was determined using an untreated and unplated bolt (ungreased, lightly oiled).

**2 year guarantee**

For full professional use!



**For safety and the accurate tightening torque: MicroClick precision tools.**



For full professional use!

**3/8"**  
10mm

**Micro-Click torque wrench MC 60-Multi, 12 – 60Nm. Especially on bicycles and motorcycles. For left- and right-hand threads.**



The open-end spanners enable lateral access for tightening screws and sleeves on pipe connections, hydraulic systems and threaded rods. Automatic quick release: Clearly audible and palpable click signal when selected torque is reached. Piece by piece calibration and inspection for high accuracy according to ISO 6789 (+/- 3 %) with certificate of conformity. 10 open-end spanners, made from

CrV steel, in sizes 10 – 19mm. Ratcheting head with 3/8"-square drive (10mm) and 4 screwdriver bits with 3/8"-drive (10mm) for HX 5 – 6 – 7 and 8mm with CrV sockets and bits of special steel. Packaged in a sturdy plastic storage case.

**NO 23 341**

**1/2"**  
12.5mm

**MicroClick torque wrench MC 200-Multi. For 40 – 200Nm. For left- and right-hand threads.**



The open-end spanners enable lateral access for tightening screws and sleeves on pipe connections, hydraulic systems and threaded rods. Automatic quick release: Clearly audible and palpable click signal when selected torque is reached. Piece by piece calibration and inspection for high accuracy according to ISO 6789 (+/- 3 %). Plug-on tools with square joint (14 x 18mm) to safely lock into position

via spring bolt: 9 open-end spanners, made from CrV steel, in sizes 13 - 14 - 15 - 17 - 19 - 22 - 24 - 27 and 30mm. Ratcheting head with 1/2"-square drive (12,5mm). With certificate of conformity. Packaged in a sturdy plastic storage case.

**NO 23 342**

**3/4"**  
19mm

**MicroClick MC 500. For 100 – 500Nm.**



For repairs on small trucks, transporters and tractors. With 3/4" square drive (19mm). Ratchet mechanism with reversing lever for clockwise and anticlockwise rotation. Sturdy steel shaft with rust-protective finish: double nickel and subsequent matt-finished chrome-plating. Piece by piece calibration and final inspection (including test certificate). Tolerance according to ISO 6789: +/- 3%.

Clearly legible analogue display with additional micro-scale for fine adjustment. Total length 820mm. Packaged in a practical plastic storage box.

**NO 23 340**

## Calibrated piece by piece. Including test certificate.

### MicroClick torque screwdriver MC 5 For 1 – 5Nm.



Automatic quick-release when tightening screws: Clearly audible and palpable click signal when the selected torque is reached. Pre-setting of the torque by turning the knurled ring at the end of the handle, fixing it by sliding it into position. Clearly legible scale display. Additional micro scale for fine adjustment: 1 rotation = 1Nm. Scale ring with 0.10Nm graduation. With 1/4" square drive (6.3mm) for holding sockets and self-locking adapter with spring sleeve for holding 1/4" (6.3mm) standard bits in a form fitting manner. Accuracy +/- 6%. Total length 165mm.

NO 23 347



### MicroClick torque screwdriver MC 2 For 0.4 – 2Nm.



Automatic quick-release when tightening screws: Clearly audible and palpable click signal when the selected torque is reached. Pre-setting of the torque by turning the knurled ring at the end of the handle (lockable). Clearly legible scale display. 50mm long slim shaft with magnetic holder for 1/4" (6.3mm) standard bits. Includes adapter with 1/4" male hexagon drive to 1/4" male square drive for sockets. Accuracy +/- 6%. Total length 170mm. Weight 135g.

NO 23 343



Self-locking adapter with spring sleeve for 1/4" standard bits is included.

### MicroClick torque screwdriver MC 10 For 2 – 10Nm.



Fine adjustment: 1 rotation = 2Nm. Scale ring with 0.2Nm graduation. Rear end with 1/4" connector for mounting a T-handle (included in the scope of delivery). Otherwise identical with the MC 5 described on the left.

NO 23 348



#### Note:

A well-shaped ergonomic screwdriver handle allows for torques from 6 to 8Nm just by manual operation. For higher torques, the MC 10 has a 1/4" square connector on the rear end for fitting a lever (T-handle, ratchet).

### MicroClick torque wrench MC 15 For 3 to 15Nm.

Automatic quick-release when tightening screws: Clearly audible and palpable click signal when the selected torque is reached. Pre-setting of the torque by turning the knurled ring at the end of the handle, fixing it by sliding it into position. Clearly legible analogue scale display and additional micro scale for fine adjustment. Scale ring with 0.4Nm graduation. 1/4" square drive (6.3mm) with adapter for use of 1/4" standard screwdriver bits. Reverse lever for clockwise and anticlockwise rotation.

Accuracy +/- 3%. Total length 195mm.


NO 23 345



1/4"-square drive and reverse lever for clockwise and anticlockwise rotation.

Piece by piece calibration and final inspection. With permanent laser-marked serial number identifying the product.

Clearly legible analogue display with additional micro-scale for fine adjustment.

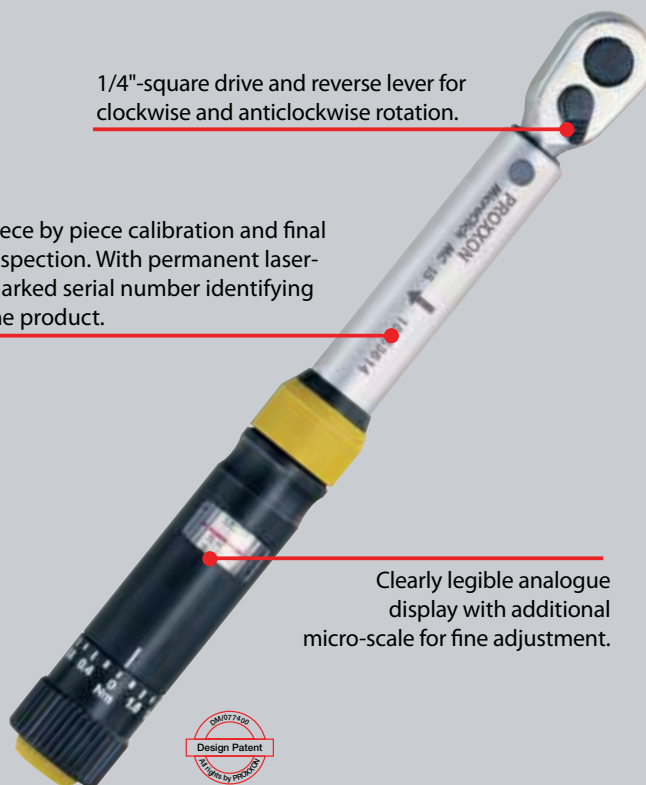

## MicroSpeeder with ratchet mechanism on the ring end.

No swapping over: a real time saver! Extra long design.

PROXXON

INDUSTRIAL

2 year  
guarantee

For full professional use!

Where old generation spanners cannot be repositioned the Speeder's ratchet function takes over.

The 72-teeth inner ring gear made of special high alloy steel allows ratcheting even when the spanner can only be moved through 5°.

However, the torque transmission capacity far exceeds the DIN/ISO standards. CrV steel shaft with optimum surface protection: double nickel-plating and single matt-finished chrome-plating. Spanner sizes easy to read due to laser marking!



A very slim head provides shelter to the fully encapsulated drive.



Compact design allows for minimal outer dimensions (A + B).



## MicroSpeeder in standard version (straight, slender design without reverse lever).



With ratchet mechanism on the ring end. No swapping over: a real time saver! Ideal for inserting into tight spaces. For removing engines, on automatic transmissions or rear axles, etc.

### MicroSpeeder in standard version, individually

|           |         |
|-----------|---------|
| NO 23 257 | Size 8  |
| NO 23 258 | Size 9  |
| NO 23 259 | Size 10 |
| NO 23 260 | Size 11 |
| NO 23 261 | Size 12 |
| NO 23 262 | Size 13 |
| NO 23 263 | Size 14 |
| NO 23 264 | Size 15 |
| NO 23 265 | Size 16 |
| NO 23 266 | Size 17 |
| NO 23 267 | Size 18 |
| NO 23 268 | Size 19 |
| NO 23 270 | Size 21 |
| NO 23 271 | Size 22 |
| NO 23 273 | Size 24 |

### 7-piece MicroSpeeder set in straight, slim design

One each 8 – 10 – 13 – 16 – 17 – 18 and 19mm in extra long design as featured. In a sturdy powder coated steel box.

NO 23 275



Straight design without reversing lever. The spanner is simply swapped over.

**2 year  
guarantee**

For full professional use!



**10-piece MicroSpeeder set in foldable plastic holder. 8 – 19mm.**



With ratchet mechanism and reverse lever on the ring end for clockwise and anticlockwise rotation. No swapping over: a real time saver. Ideally suited for working on flat surfaces due to its 15° offset ring side. Practical foldable holder offering a clearly marked place for storage of each spanner. The ideal companion for construction site work. Holder also provides holes for wall-mounting in the workshop. With clearly readable sizes. Organised forever!

One each in extra long design, sizes 8 – 10 – 11 – 12 – 13 – 14 – 16 – 17 – 18 and 19mm.

**NO 23 126**



**MicroSpeeder with reverse lever and 15° offset ring side.**



As the 15° offset ring makes turning over of the spanner impossible, the spanner offers a reverse lever. Its design makes it ideally suited for working on flat surfaces.

**MicroSpeeder with reverse lever, individually**

- NO 23 130**      Size 8
- NO 23 131**      Size 9
- NO 23 132**      Size 10
- NO 23 133**      Size 11
- NO 23 134**      Size 12
- NO 23 135**      Size 13
- NO 23 136**      Size 14
- NO 23 137**      Size 15
- NO 23 138**      Size 16
- NO 23 139**      Size 17
- NO 23 140**      Size 18
- NO 23 141**      Size 19
- NO 23 143**      Size 21
- NO 23 144**      Size 22
- NO 23 146**      Size 24

**7-piece MicroSpeeder set with reverse lever**

One each 8 – 10 – 13 – 16 – 17 – 18 and 19mm in a sturdy powder coated steel box.

**NO 23 124**



With its 15° offset ring side, it is ideally suited for working on flat surfaces.



**MicroSpeeder ratcheting function. No swapping over of the spanner:**

**a real time saver. Extra long design.**

**Double ring MicroSpeeder in straight, slender design. Ideal for inserting into tight spaces.**



*Straight design without reversing lever. The spanner is simply swapped over.*

Often used for demounting engines, working on automatic transmissions, rear axles, etc. Ratcheting function with 72-teeth inner gear ring, made of high alloy special steel allowing ratcheting even when the spanner can only be moved through 5°. Shaft of CrV steel with optimum surface protection: double nickel-plating and single matt-finished chrome-plating. With durable laser marking and easy-to-read sizes.

**NO 23 241** Size 8 x 9  
**NO 23 243** Size 10 x 11  
**NO 23 244** Size 10 x 13  
**NO 23 246** Size 12 x 13

**NO 23 247** Size 14 x 15  
**NO 23 249** Size 16 x 18  
**NO 23 250** Size 17 x 19  
**NO 23 252** Size 22 x 24

**2 year guarantee**

For full professional use!

**Hinged MicroSpeeder with self positioning ring head, tilting through 90° to both sides.**



The self positioning action of the hinged ring side substantially reduces work load, while its flexibility and durability remain unmatched. The self positioning action of the ring is ideal for tight locations.

**Hinged MicroSpeeder, individually**

**NO 23 045** Size 8mm  
**NO 23 046** Size 9mm  
**NO 23 047** Size 10mm  
**NO 23 048** Size 11mm  
**NO 23 049** Size 12mm  
**NO 23 050** Size 13mm  
**NO 23 051** Size 14mm  
**NO 23 052** Size 15mm  
**NO 23 053** Size 16mm  
**NO 23 054** Size 17mm  
**NO 23 055** Size 18mm  
**NO 23 056** Size 19mm  
**NO 23 058** Size 21mm  
**NO 23 059** Size 22mm  
**NO 23 061** Size 24mm

**7-piece Hinged MicroSpeeder set**

One each 8, 10, 13, 16, 17, 18 and 19mm of the long version, in a sturdy powder coated steel box.

**NO 23 068**



**Inversible joint:**  
 Unbeatable in tight places!

# Quadruple MicroSpeeder. Just one tool for the four most important automotive

## fasteners: 10 – 13 – 17 – 19mm.

PROXXON

INDUSTRIAL



Ratcheting function with 72-teeth inner gear ring, made of high alloy special steel allowing ratcheting even when the spanner can only be moved through 5°. With reverse lever for clockwise and anticlockwise rotation. Shaft of CrV steel with optimum surface protection: double nickel-plating and single matt-finished chrome-plating. With durable laser marking and easy-to-read sizes. Total length 210mm.

**NO 23 236**

**2 year guarantee**

For full professional use!

**Note:**


The Quadruple MicroSpeeder is somewhat bulkier when compared to using double ring MicroSpeeders 10 x 13 or 17 x 19mm. Also it cannot be passed through for sizes 13 and 19. But you have just one single tool in your pocket!

**Standard Speeder ratchet spanners. With reverse lever. Easy, handy and especially practical for installation work.**

**6-piece Speeder ratchet spanner set**

Spanners 6 – 19mm. One each in sizes 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15 and 17 x 19mm. Reliable ratchet mechanism with inner ring gear of CrV steel (reversible). Packed in sturdy steel box (powder coated) with flap clasp. Tray with practical recess area for storage of small parts (the depicted nuts are not included in the scope of delivery).

**NO 23 231**




**DIN  
ISO**


**Speeder ratchet spanners, individually**

|                  |              |                  |              |
|------------------|--------------|------------------|--------------|
| <b>NO 23 201</b> | Size 6 x 7   | <b>NO 23 211</b> | Size 14 x 15 |
| <b>NO 23 204</b> | Size 8 x 9   | <b>NO 23 214</b> | Size 16 x 18 |
| <b>NO 23 205</b> | Size 10 x 11 | <b>NO 23 215</b> | Size 17 x 19 |
| <b>NO 23 207</b> | Size 10 x 13 | <b>NO 23 216</b> | Size 19 x 21 |
| <b>NO 23 209</b> | Size 12 x 13 |                  |              |

# SlimLine spanners. Hands-on tools. CrV steel drop forged, carefully hardened and pla



For full professional use!



- Optimal surface protection by means of double nickel-plating and single chrome-plating. With easy to hold, smooth finish.
- With durable laser inscribed and clearly readable sizes in mm.
- Polished heads: slim and thin walled. Torque characteristics still exceed DIN/ISO requirements.
- Dimensional tolerances are better than those required by DIN/ISO. Each piece is checked.


## 8-piece SlimLine open-end spanner set, including holder. To DIN 3110 and ISO 3318.

Includes 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19 and 20 x 22mm. Supplied with a plastic holder with slot for each spanner and holes for attaching to a wall. All spanners clearly labelled to make them easy to find.

NO 23 800 set



Each spanner has a clearly marked place for storage. The plastic holder also offers holes to allow for fixing it to a wall.

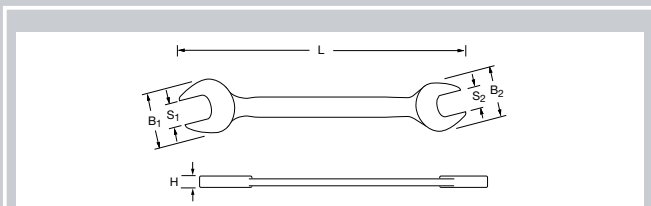

| PROXXON INDUSTRIAL |                                 | SlimLine open-end spanners, individually |                |     |     |  |
|--------------------|---------------------------------|--|----------------|-----|-----|--|
|                    | S <sub>1</sub> x S <sub>2</sub> | B <sub>1</sub>                           | B <sub>2</sub> | L   | H   |  |
| 23 828             | 5 x 5,5 mm                      | 13                                       | 14             | 111 | 3   |  |
| 23 830             | 6 x 7 mm                        | 16                                       | 18             | 123 | 3.4 |  |
| 23 832             | 8 x 9 mm                        | 20                                       | 22             | 140 | 3.5 |  |
| 23 834             | 10 x 11 mm                      | 24                                       | 26             | 157 | 4.5 |  |
| 23 836             | 12 x 13 mm                      | 28                                       | 29             | 173 | 4.7 |  |
| 23 838             | 10 x 13 mm                      | 24                                       | 29             | 174 | 4.7 |  |
| 23 840             | 14 x 15 mm                      | 32                                       | 34             | 190 | 5.5 |  |
| 23 842             | 16 x 17 mm                      | 36                                       | 38             | 205 | 6   |  |
| 23 846             | 18 x 19 mm                      | 38                                       | 42             | 220 | 6.5 |  |
| 23 848             | 17 x 19 mm                      | 38                                       | 42             | 220 | 6.5 |  |
| 23 850             | 20 x 22 mm                      | 43                                       | 46             | 235 | 7.5 |  |
| 23 852             | 21 x 23 mm                      | 45                                       | 48             | 248 | 7.5 |  |
| 23 856             | 24 x 27 mm                      | 49                                       | 55             | 268 | 8.5 |  |
| 23 860             | 30 x 32 mm                      | 59                                       | 64             | 302 | 9.5 |  |
| 23 864             | 34 x 36 mm                      | 65                                       | 79             | 320 | 10  |  |
| 23 866             | 41 x 46 mm                      | 86                                       | 95             | 415 | 15  |  |



**12-piece SlimLine ring-combination spanner set. Including holder. To DIN 3113 and ISO 3318 (ring head offset 15°).**


Sizes 6 – 7 – 8 – 9 – 10 – 11 – 12 – 13 – 14 – 15 – 17 and 19mm. Each spanner has a clearly marked place for storage. The plastic holder also offers fixing holes.

**NO 23 820** set

**15-piece SlimLine combination spanner set. With the new ISO sizes 16, 18 and 21mm. Otherwise as described on the left.**


Sizes 6 – 7 – 8 – 9 – 10 – 11 – 12 – 13 – 14 – 15 – 16 – 17 – 18 – 19 and 21mm.

**NO 23 821** set

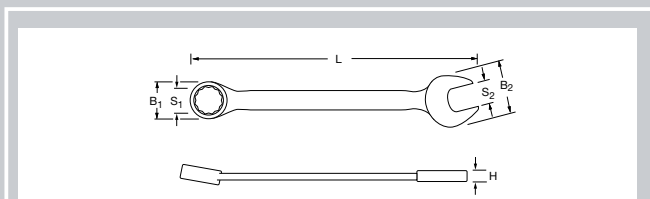

**PROXXON INDUSTRIAL SlimLine combination spanners, individually**

|        | S <sub>1</sub> | B <sub>1</sub> | B <sub>2</sub> | L   | H    |
|--------|----------------|----------------|----------------|-----|------|
| 23 905 | 5,5 mm         | 9              | 14             | 93  | 3.3  |
| 23 906 | 6 mm           | 10             | 16             | 100 | 3.5  |
| 23 907 | 7 mm           | 12             | 18             | 110 | 3.5  |
| 23 908 | 8 mm           | 13             | 20             | 120 | 4    |
| 23 909 | 9 mm           | 15             | 22             | 130 | 4    |
| 23 910 | 10 mm          | 16             | 24             | 140 | 4.5  |
| 23 911 | 11 mm          | 17             | 26             | 150 | 4.9  |
| 23 912 | 12 mm          | 19             | 28             | 160 | 5    |
| 23 913 | 13 mm          | 20             | 29             | 170 | 5,5  |
| 23 914 | 14 mm          | 22             | 32             | 180 | 5.8  |
| 23 915 | 15 mm          | 24             | 34             | 190 | 5.9  |
| 23 916 | 16 mm          | 25             | 36             | 195 | 5.9  |
| 23 917 | 17 mm          | 25             | 38             | 210 | 6.4  |
| 23 918 | 18 mm          | 28             | 38             | 216 | 6.9  |
| 23 919 | 19 mm          | 28             | 42             | 230 | 7.1  |
| 23 920 | 20 mm          | 30             | 46             | 250 | 7.3  |
| 23 921 | 21 mm          | 32             | 45             | 245 | 7.5  |
| 23 922 | 22 mm          | 33             | 46             | 270 | 8.2  |
| 23 924 | 24 mm          | 36             | 49             | 280 | 8.3  |
| 23 927 | 27 mm          | 39             | 55             | 310 | 9.1  |
| 23 930 | 30 mm          | 44             | 59             | 340 | 10   |
| 23 932 | 32 mm          | 46             | 64             | 360 | 10.8 |
| 23 933 | 34 mm          | 50             | 70             | 380 | 15   |
| 23 935 | 36 mm          | 54             | 74             | 410 | 18   |
| 23 937 | 41 mm          | 61             | 84             | 460 | 21   |



SlimLine-double ring and SlimLine combination spanner sets in canvas roll bag (for metric and imperial screw sizes) are featured on pages 30/31.





**SlimLine spanners. Forged from CrV steel, carefully hardened and plated.**

**With clearly readable sizes.**



**10 year guarantee**  
For full professional use!




Each spanner has a clearly marked place for storage. The plastic holder also offers holes to allow for fixing it to a wall.

**8-piece SlimLine double ring spanner set. Including holder. To DIN 838 and ISO 3318.**

Sizes 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19 and 20 x 22 mm.

Each spanner has a clearly marked place for storage. The plastic holder also offers holes to allow for fixing it to a wall.

**NO 23 810** set

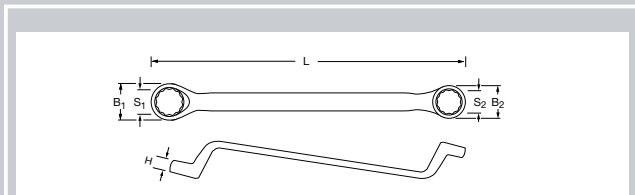

|        | <b>S<sub>1</sub> x S<sub>2</sub></b> | <b>B<sub>1</sub></b> | <b>B<sub>2</sub></b> | <b>L</b> | <b>H</b> |
|--------|--------------------------------------|----------------------|----------------------|----------|----------|
| 23 868 | 5 x 5,5 mm                           | 9                    | 10                   | 162      | 5        |
| 23 870 | 6 x 7 mm                             | 10                   | 12                   | 173      | 5.6      |
| 23 872 | 8 x 9 mm                             | 13                   | 14                   | 182      | 6.1      |
| 23 874 | 10 x 11 mm                           | 16                   | 17                   | 200      | 7.9      |
| 23 876 | 12 x 13 mm                           | 18                   | 19                   | 212      | 8.5      |
| 23 878 | 10 x 13 mm                           | 16                   | 19                   | 212      | 8.5      |
| 23 880 | 14 x 15 mm                           | 21                   | 23                   | 225      | 9.8      |
| 23 882 | 16 x 17 mm                           | 24                   | 25                   | 245      | 10.4     |
| 23 886 | 18 x 19 mm                           | 27                   | 28                   | 260      | 11.3     |
| 23 888 | 17 x 19 mm                           | 25                   | 28                   | 216      | 11.3     |
| 23 890 | 20 x 22 mm                           | 30                   | 32                   | 285      | 12.8     |
| 23 892 | 21 x 23 mm                           | 31                   | 33                   | 310      | 12.9     |
| 23 896 | 24 x 27 mm                           | 34                   | 38                   | 335      | 13.9     |
| 23 900 | 30 x 32 mm                           | 42                   | 45                   | 375      | 15.3     |



**SlimLine spanners, packed in cardboard box.**

**Complete sets for sizes from 6 to 32mm. Hands-on tools.**

**21-piece SlimLine combination spanner set. From 6 to 32mm. To DIN 3113 and ISO 3318 (15° offset ring head).**

**10 year guarantee**

**For full professional use!**



Sizes 6 – 7 – 8 – 9 – 10 – 11 – 12 – 13 – 14 – 15 – 16 – 17 – 18 – 19 – 20 – 21 – 22 – 24 – 27 – 30 and 32mm. Clearly arranged in a sturdy cardboard box.

**NO 23 822** set

**11-piece SlimLine open-end spanner set. From 6 to 32mm. To DIN 3110 and ISO 3318.**

**11-piece SlimLine double ring spanner set. From 6 to 32mm. To DIN 838 and ISO 3318.**



Sizes 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27 and 30 x 32mm. Clearly arranged in a sturdy cardboard box.

Sizes 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27 and 30 x 32mm. Clearly arranged in a sturdy cardboard box.

**NO 23 802** set

**NO 23 812** set

**SlimLine combination spanner sets for metric and imperial screw sizes. With 15° offset ring head. In practical canvas roll bag with holes for hanging up.**

**12-piece SlimLine combination spanner set for metric screw sizes.**

**12-piece SlimLine combination spanner set for imperial screw sizes.**



Spanner sizes: 6 – 7 – 8 – 9 – 10 – 11 – 12 – 13 – 14 – 15 – 17 and 19mm.

Spanner sizes: 1/4" – 9/32" – 5/16" – 11/32" – 3/8" – 7/16" – 1/2" – 9/16" – 5/8" – 11/16" – 3/4" and 13/16".

**NO 23 825**

**NO 23 816**



**Note:**


Practical bag for hanging up in the workshop or to roll up for on the way.

## Super safety and speciality bit set.

### Nothing is impossible to unscrew!

■ Deep hole bits (80mm)

■ Regular bits (25mm)

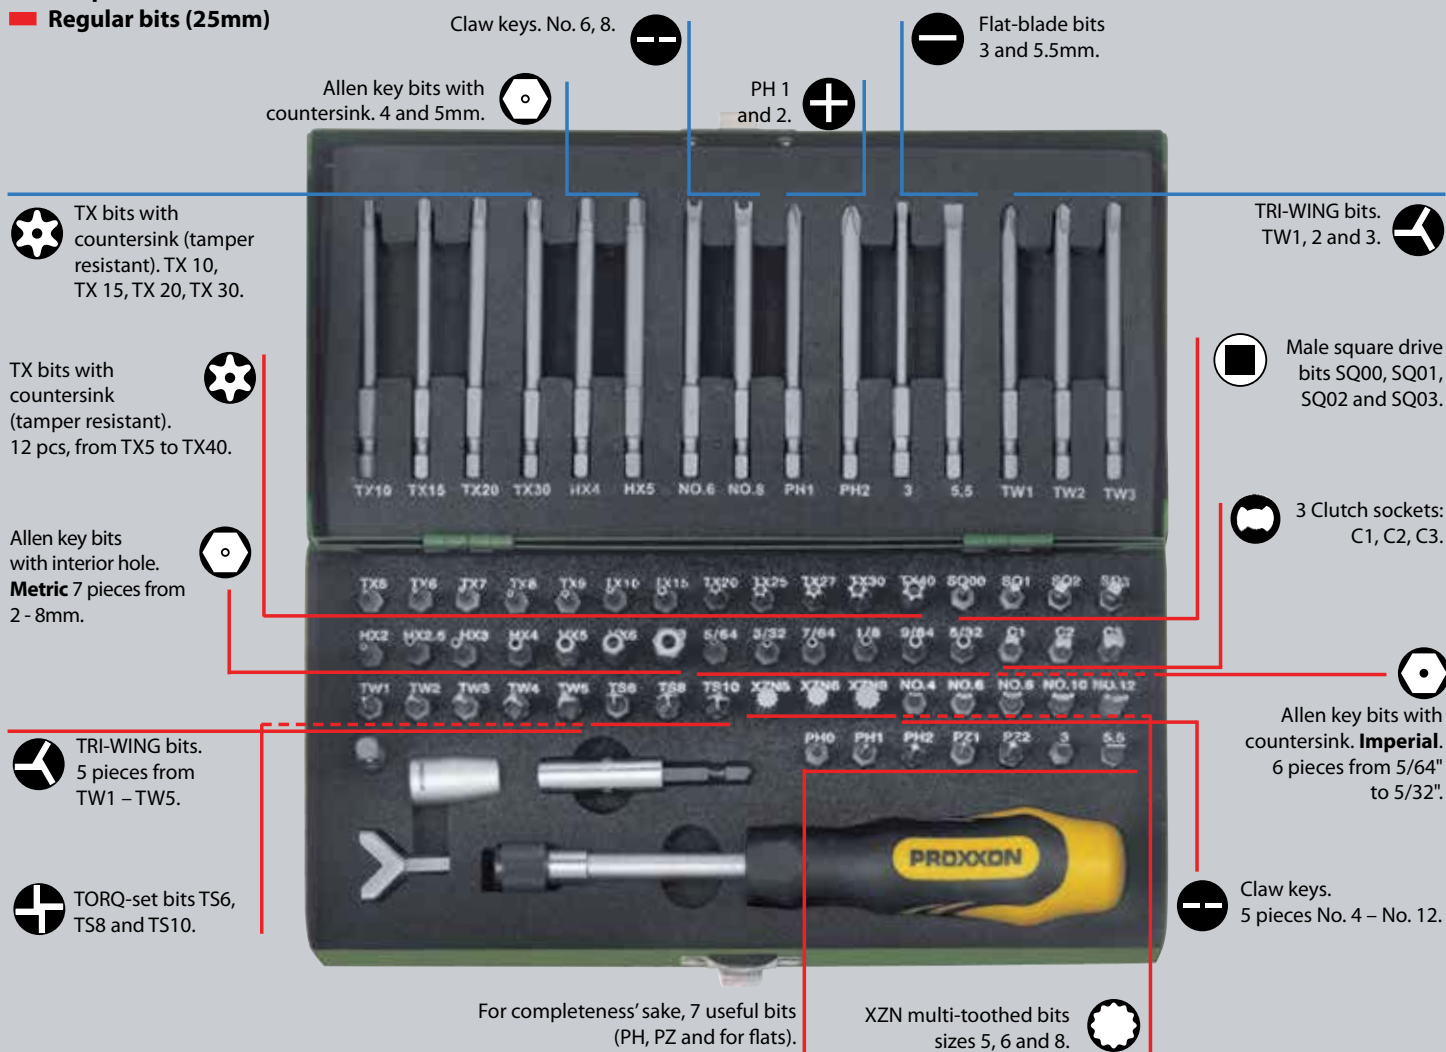

## 75-piece super safety and specialty bit set

With 1/4" special bits (6.3mm) in standard length (25mm) and extra long for tapped blind holes (80mm). Including screwdriver with positive spring-sleeve holder for bits. Magnetic holder for work with electric screwdriver or drill. Adapter with male square and male hex drive and matching attachment with female square and female hex drive.

Special attachment for centrally clamping screw hooks and similar parts. All in sturdy steel box with powder coated finish. All parts are clearly marked.

**NO 23 107**



### 9-piece Allen key set


With spherical finish on the long end (short end chamfered). One each 1.5 - 2 - 2.5 - 3 - 4 - 5 - 6 - 8 and 10mm. Chrome-vanadium steel. In foldable plastic holder.

**NO 23 946**

### 9-piece TX set

One each TX 8 - 10 - 15 - 20 - 25 - 27 - 30 - 40 and 50. Made from Nickel-Chrome-Molybdenum special steel. In foldable plastic holder.

**NO 23 944**

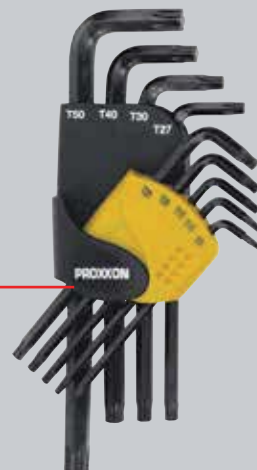

## Screwdriver set with foldable ratchet-screwdriver and magnetic holder for working with electric screwdrivers.

DIN  
ISO

2 year  
guarantee

For full professional use!

**Foldable screwdriver with ratchet mechanism:**  
To reach higher torque, simply bend the screwdriver handle. No need to swap over. For 1/4" standard bits.



Locking of the handle in normal and angled position at the push of a button. Reverse lever for clockwise and anticlockwise rotation by turning the shift ring. In centre position the ratchet function is eliminated. Autolock system: Bits are form-locked automatically when inserted by means of a spring and a magnet. To release, slide ejector backwards.  
**NO 22 288**

### Screwdriver set with foldable ratchet-screwdriver and magnetic holder, 54-piece.

With 35 bits 1/4" (6.3mm) in standard length (25mm) and 16 bits extra long (80mm) for tapped blind holes. Including adapter with male square and male hex drive as well as matching attachment with female square and female hex drive. Special attachment for centrally clamping screw hooks and similar parts. 10 sockets 1/4" from 5.5 – 13mm. In addition, magnetic holder for work with electric screwdriver or drill. In sturdy steel box (powder-coated).

**NO 23 104**

**Bits in industrial quality, accurate and wear resistant.**




Made of special chrome-molybdenum-silicon-manganese-vanadium steel alloy. Hardened according to latest production standards.

- ⊖ For slotted screws 3 – 5.5 and 10mm. Also in long version.
- ⊕ For PHILLIPS screws (PH) in sizes 1 – 2 and 3. Long version for sizes 1 and 2.
- ⊗ For Pozidrive (PZ) screws in sizes 1 – 2 and 3.
- ⊛ For TX screws (with frontal hole) in sizes 8 – 9 – 10 – 15 – 20 – 25 – 27 – 30 and 40.
- ⊛ Long version for TX 10 – 15 – 20 – 25 – 30 and 40.
- ⊙ For Allen (HX) screws 2.5 – 3 – 4 – 5 and 6mm. Long version for HX 3 – 4 – 5 and 6mm.

### 8-piece pocket Allen key set

One each 1.5 – 2 – 2.5 – 3 – 4 – 5 – 6 and 8mm. Made from Chrome-Molybdenum special steel, galvanically plated. In pocket knife type plastic holder which also serves as a handle.  
**NO 23 956**



### 8-piece pocket TX key set

One each TX 9 – 10 – 15 – 20 – 25 – 27 – 30 and 40. Made from Nickel-Chrome-Molybdenum special steel. In pocket knife type plastic holder which also serves as a handle.  
**NO 23 954**



# FLEX-DOT screwdrivers. The allrounders for workshop and assembly.

PROXXON

INDUSTRIAL

DIN  
ISO

2 year  
guarantee

For full professional use!

## Ergonomic design for proper handling:

Rounded two-component handle with flexible "FLEX-DOT" nubs for fatigue-proof and comfortable continuous use. Excellent grip attitude also with quick regripping. Combines high torques and pressure forces with balanced design for horizontal and vertical approach.

With transverse hole for hanging up or applying a lever.

Oil- and acid resistant non-stick special rubber handle.

Easy-to-read sizes through laser marking process on matte-chrome plated shafts of chrome-silicon-manganese-molybdenum special alloy steel.

Processed black tip for greatest precision for accepting screws. Also prevents tool from slipping.

Blade symbol and size on end of grip.

Finger recesses for more grip during fast turning.

With hexagon flat for using an open-end spanner as lever (for sizes 8 and 10 on slotted and PH3 and PZ3 version).




## Flat-blade screwdrivers



| NO               | mm  | mm  | mm  | mm  |
|------------------|-----|-----|-----|-----|
| 22 010           | 3   | 0.5 | 100 | 75  |
| 22 012           | 4   | 0.8 | 100 | 75  |
| 22 014           | 5.5 | 1   | 125 | 100 |
| 22 016           | 6.5 | 1.2 | 150 | 110 |
| 22 018           | 8   | 1.2 | 175 | 122 |
| 22 020           | 10  | 1.6 | 200 | 122 |
| 22 026<br>Stubby | 5.5 | 1   | 25  | 60  |


## HX (ball head) screwdrivers



| NO     | HX  | mm  | mm  |
|--------|-----|-----|-----|
| 22 204 | 2   | 100 | 75  |
| 22 206 | 2.5 | 100 | 75  |
| 22 208 | 3   | 100 | 75  |
| 22 210 | 4   | 100 | 100 |
| 22 212 | 5   | 100 | 110 |
| 22 214 | 6   | 150 | 110 |
| 22 216 | 8   | 150 | 122 |



## PHILLIPS screwdrivers



| NO               | PH | mm  | mm  |
|------------------|----|-----|-----|
| 22 050           | 0  | 60  | 75  |
| 22 052           | 1  | 80  | 100 |
| 22 054           | 2  | 100 | 110 |
| 22 056           | 3  | 150 | 122 |
| 22 060<br>Stubby | 2  | 25  | 60  |

## POZIDRIV Phillips screwdrivers



| NO     | PZ | mm  | mm  |
|--------|----|-----|-----|
| 22 070 | 0  | 60  | 75  |
| 22 072 | 1  | 80  | 100 |
| 22 074 | 2  | 100 | 110 |
| 22 076 | 3  | 150 | 122 |



### TX Tamper screwdrivers (with frontal hole)

| NO     | TTX | mm  | mm  |
|--------|-----|-----|-----|
| 22 230 | 8   | 75  | 75  |
| 22 232 | 10  | 100 | 100 |
| 22 234 | 15  | 100 | 100 |
| 22 236 | 20  | 100 | 100 |
| 22 238 | 25  | 100 | 110 |
| 22 240 | 27  | 100 | 110 |
| 22 242 | 30  | 100 | 110 |
| 22 244 | 40  | 100 | 110 |

### X nut screwdrivers


| NO     | HX  | mm  | mm  |
|--------|-----|-----|-----|
| 22 260 | 5.5 | 125 | 110 |
| 22 262 | 6   | 125 | 110 |
| 22 264 | 7   | 125 | 110 |
| 22 266 | 8   | 125 | 110 |
| 22 268 | 9   | 125 | 110 |
| 22 270 | 10  | 125 | 110 |
| 22 272 | 11  | 125 | 110 |
| 22 274 | 12  | 125 | 110 |
| 22 276 | 13  | 125 | 110 |

### MICRO special hook set, 4-piece




For the automotive sector, industry and trade. Ideal for disconnecting wires, removing small fuses or (dis-)assembly of O-rings. Including 4 types of hooks: (1) straight tip, (2) 90° angled tip, (3) 45° angled tip, (4) full hook tip. Blade Ø 3mm. Blade length 80mm. Overall length 155mm.

NO 22 700

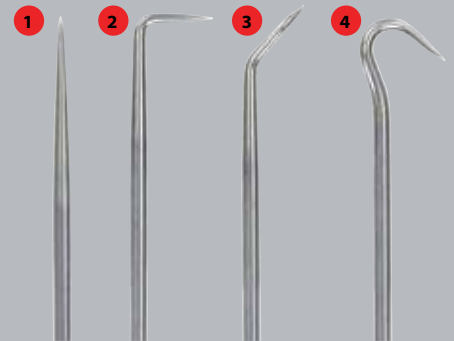


### Screwdrivers for 1/4" standard bits and 1/4" sockets

For 1/4" hexagon standard bits (6.3mm). Steel screws stick to magnetised bit which facilitates positioning of the screws.

NO 22 281 



| mm  | mm  |
|-----|-----|
| 100 | 110 |

For standard 1/4" hex bits (6.3mm). The auto-lock-system positively holds the bit. To release, push the sleeve backwards.


NO 22 282 

| mm  | mm  |
|-----|-----|
| 110 | 110 |

For use with 1/4"-square sockets or 1/4"-hexagon standard bits (6.3mm). Choice between the two options simply by sliding the sleeve.

NO 22 283  



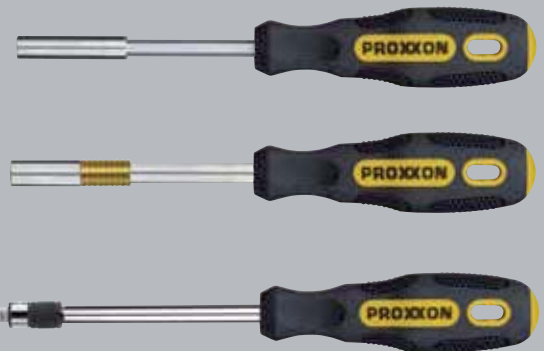




| mm  | mm  |
|-----|-----|
| 110 | 110 |



## Popular screwdriver combinations for daily use.

### FLEX-DOT 6-piece screwdriver sets

Combinations that are a must-have for every tool box. Complete initial equipment for mechanics and service technicians.

| NO     | Contents  |        |        |        |      |
|--------|---|--------|--------|--------|------|
| 22 604 |  4 x Flat-blade:     | 3      | 4      | 5.5    | 6.5  |
|        |  2 x Phillips:       | PH 1   | PH 2   |        |      |
| 22 606 |  4 x Flat-blade:     | 3      | 4      | 5.5    | 6.5  |
|        |  2 x Pozidriv:       | PZ 1   | PZ 2   |        |      |
| 22 640 |  6 x Tamper-TX:      | TTX 10 | TTX 15 | TTX 20 |      |
|        |   | TTX 25 | TTX 30 | TTX 40 |      |
| 22 642 |  6 x HX:             | HX 2.5 | HX 3   | HX 4   | HX 5 |
|        |   | HX 6   | HX 8   |        |      |
| 22 644 |  6 x HX:<br>External | 5.5    | 6      | 7      | 8    |
|        |   |        | 10     | 13     |      |




## L-handle screwdrivers: Very robust with continuous blade.

PROXXON


INDUSTRIAL

If high torques are required for tightening or loosening screws, the L-handle screwdriver is the solution. The ergonomic and asymmetrical grip simplifies handling under continuous operation. Its two-component design with soft zones reduces pressure marks while at the same time allowing for optimum torque transfer. Easy-to-read sizes on shaft (laser marking) and handle.

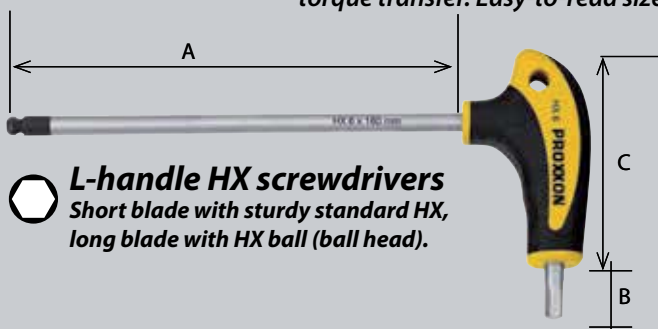

**L-handle HX screwdrivers**  
Short blade with sturdy standard HX, long blade with HX ball (ball head).

| NO     | HX  | A mm | B mm | C mm |
|--------|-----|------|------|------|
| 22 402 | 2   | 110  | 15   | 55   |
| 22 404 | 2.5 | 110  | 15   | 55   |
| 22 406 | 3   | 110  | 15   | 55   |
| 22 408 | 4   | 110  | 15   | 55   |
| 22 410 | 5   | 160  | 20   | 75   |
| 22 412 | 6   | 160  | 20   | 75   |
| 22 414 | 7   | 160  | 20   | 75   |
| 22 416 | 8   | 200  | 20   | 75   |
| 22 418 | 10  | 215  | 20   | 100  |

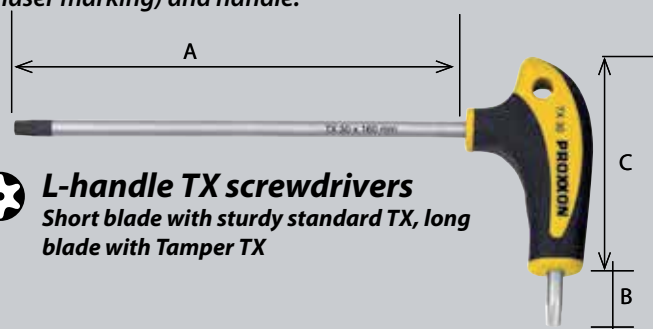

**L-handle TX screwdrivers**  
Short blade with sturdy standard TX, long blade with Tamper TX

| NO     | TX | A mm | B mm | C mm |
|--------|----|------|------|------|
| 22 440 | 8  | 110  | 15   | 55   |
| 22 442 | 9  | 110  | 15   | 55   |
| 22 444 | 10 | 110  | 15   | 55   |
| 22 446 | 15 | 110  | 15   | 55   |
| 22 448 | 20 | 110  | 15   | 55   |
| 22 450 | 25 | 160  | 20   | 75   |
| 22 452 | 27 | 160  | 20   | 75   |
| 22 454 | 30 | 160  | 20   | 75   |
| 22 456 | 40 | 185  | 20   | 75   |
| 22 458 | 45 | 215  | 20   | 100  |
| 22 460 | 50 | 215  | 20   | 100  |



### L-handle screwdriver sets

With versatile holder for the workshop. Clearly specified sizes on the holder for neat storage of L-handle screwdrivers.

| NO     | Contents  |
|--------|---|
| 22 650 | 8-piece L-handle HX set with holder<br>HX 2 – 2.5 – 3 – 4 – 5 – 6 – 8 – 10                |
| 22 652 | 10-piece L-handle TX set with holder<br>TX 8 – 10 – 15 – 20 – 25 – 27 – 30 – 40 – 45 – 50 |



### Precision screwdrivers for electronic engineers, camera builders,

#### MICRO-Driver, 13-piece

|   |             |   |
|---|-------------|---|
| — | Flat-blade: | 1 x 50 – 2 x 50                             |
| + | Phillips:   | PH 000 x 50 – PH 0 x 50 – PH 1 x 50         |
| ✳ | TX:         | 5 x 50 – 6 x 50 – 7 x 50 – 8 x 50 – 10 x 50 |
| ○ | HX:         | 1,5 x 50 – 2 x 50                           |

NO 22 720

Packaged in a practical zipper case. Including one tweezer for gripping small screws and small parts.

# Insulated FLEX-DOT screwdrivers to VDE-Standard

Insulated VDE screwdrivers for work on or around live components up to 1,000V AC. Injection of the protective insulation onto the screwdriver blade and piece by piece inspection offer maximum safety. SLIM-type blade as of size Flat-blade 4.

PROXXON

INDUSTRIAL

Standard-blade



SLIM-type-blade



SLIM-type




For full professional use!

2 year guarantee




## Insulated flat-blade screwdrivers



NO      mm      mm      mm      mm

|        |     |     |     |     |
|--------|-----|-----|-----|-----|
| 22 300 | 2.5 | 0.4 | 75  | 75  |
| 22 304 | 4   | 0.8 | 100 | 100 |
| 22 306 | 5.5 | 1   | 125 | 100 |
| 22 308 | 6.5 | 1.2 | 150 | 110 |

## Insulated PHILLIPS screwdrivers



NO      PH      mm      mm

|        |   |     |     |
|--------|---|-----|-----|
| 22 330 | 0 | 60  | 75  |
| 22 332 | 1 | 80  | 100 |
| 22 334 | 2 | 100 | 110 |

## Insulated combination blade SL/PZ screwdrivers



The new blade type exactly fits combination screws (slotted/pozidriv) frequently used in electrical installation, e.g. in switch cabinets, fuse boxes and terminal blocks.

NO

|        |       |           |
|--------|-------|-----------|
| 22 342 | SL/PZ | 1 x 80mm  |
| 22 344 | SL/PZ | 2 x 100mm |


## 6-piece insulated VDE screwdriver set

| NO     | Contents  |
|--------|---|
| 22 630 | <ul style="list-style-type: none"> <li>4x Flat-blade 2.5    4    5.5    6.5</li> <li>2x PH            PH 1    PH 2</li> </ul> |



## Voltage tester as per VDE 0680

Indication of voltage between phases 220 to 250V, 50/60Hz (up to 500Hz). Of high-strength ABS, with roughened, non-slip surface. Tested piece by piece at 2,000V. Blade length 60mm. Total length 140mm.



NO      mm      mm      mm      mm

|        |     |     |    |     |
|--------|-----|-----|----|-----|
| 22 390 | 3   | 0.5 | 60 | 75  |
| 22 392 | 3.5 | 0.5 | 80 | 100 |



## watchmakers, jewellers, precision engineers and model makers.

### 15-piece MICRO-Driver set

Blades of high alloy nickel-chrome-molybdenum steel for maximum hardness and toughness. Chrome-plated with brinelled tip. With ergonomically formed two-component handle of high-quality plastic (impact as well as oil and acid resistant) with soft component in the finger grip area. The revolving top and finger mould improve easy of use.

— Flat-blade:

1 x 50 – 2 x 50 – 3 x 50

+ Phillips:

PH 000 x 50 – PH 0 x 50 – PH 1 x 50

\* TX:

5 x 50 – 6 x 50 – 8 x 50 – 10 x 50 – 15 x 50

○ HX:


1.5 x 50 – 2 x 50 – 2.5 x 50 – 3 x 50

NO 28 148





## Contents

|   |   | Page/Pages           |
|---|---|----------------------|
|    | <b>Socket sets and tool sets</b><br><i>14-piece 3/4" socket set</i>                       | <b>3 – 10</b><br>18  |
|    | <b>Cordless screwdriver ASD</b><br><i>Universal and oil suction pump AP 12</i>            | <b>9</b>             |
|     | <b>Ratchets, socket sets and drive elements</b>   | <b>11 – 18</b>       |
|     | <b>Special workshop sets, adjustable wrenches</b><br><i>IMPACT sockets for wheel nuts</i> | <b>19</b>            |
|     | <b>MicroClick torque screwdrivers and</b><br><i>MicroClick torque wrenches</i>            | <b>20 – 23</b>       |
|   | <b>MicroSpeeder and speeder ratchet spanners</b>  | <b>24 – 27</b>       |
|  | <b>SlimLine spanners</b>  | <b>28 – 31</b>       |
|  | <b>Specialty bit sets and</b><br><i>key and pocket key sets</i>                           | <b>32 – 33</b>       |
|   | <b>FLEX-DOT screwdrivers</b><br><i>MICRO-Driver</i>                                       | <b>34 – 37</b><br>37 |

For the PROXXON MICROMOT-system there is a separate 70-page catalogue, which is available free of charge. Please send your request to the below mentioned address.



We reserve the right for technical modifications as a result of improvements.  
Errors and omissions excepted.

### PROXXON GmbH

Industriepark Region Trier • Dieselstraße 3 - 7 • DE-54343 Föhren  
Phone: + 49 (0) 65 02 – 93 17 – 0 • Fax: + 49 (0) 65 02 – 93 17 – 200  
e-mail: [export@proxxon.com](mailto:export@proxxon.com) • [www.proxxon.com](http://www.proxxon.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Spanners](#) category:*

*Click to view products by [Proxxon](#) manufacturer:*

Other Similar products are found below :

[74005](#) [74008](#) [1406504-3](#) [1406504-4](#) [1406504-5](#) [1406504-7](#) [1725859-2](#) [9965](#) [999-16625-001](#) [G70515-18](#) [1055265-1](#) [1055267-1](#) [1-1406504-0](#) [1055787-1](#) [DCH.91.251.PA](#) [TG70-18](#) [TG70](#) [G62748-11](#) [DPH.99.005.2K](#) [DCP.91.045.TN](#) [1055512-1](#) [1055276-1](#) [R282303020](#) [TA-0456](#) [DCA.91.149.0TN](#) [TA-0436](#) [TA-0398](#) [TOL-222901](#) [74\\_Z-0-0-193](#) [294GB-5069-17-N](#) [74\\_Z-0-0-2](#) [523200-4](#) [294GB-5070-25-A](#) [74\\_Z-0-0-79](#) [294GB-5070-17-A](#) [74\\_Z-0-0-321](#) [TOL-171801](#) [1490262-2](#) [9968](#) [AC24VS](#) [80117](#) [DCN.91.149.0TK](#) [BT-A-6010CAGE](#) [R282340000](#) [BT-BS-609WT](#) [BT-A-6000B](#) [R282303000](#) [BT-BS-610R](#) [BT-BS-610RT](#) [28M-6](#)