

SPECIFICATIONS

PARAMETERS	VALUES	UNITS	
RESONANT FREQUENCY	2,900 ± 500	900 ± 500 Hz	
RESONANT IMPEDANCE (MAX)	500	Ohm	
MAX INPUT VOLTAGE	30	Vp-р	
CAPACITANCE @ 1kHZ	25,000 ± 30%	pF	
PLATE MATERIAL	BRASS	-	
OPERATING TEMPERATURE	-20 ~ +70	С°	
STORAGE TEMPERATURE	STORAGE TEMPERATURE -30 ~ +80 °C		
WEIGHT	3.5	g	
	-		

7	7		
PROPRIETARY TO PRODUCTION, IN TEN PERMISSION DHIBITED. Inc.		REVISION HIS	
	LTR	DESCRIPTION	
	-	RELEASED FROM ENGINEERING	
	Α	UPDATE PLATE THICKNESS DIMENS	

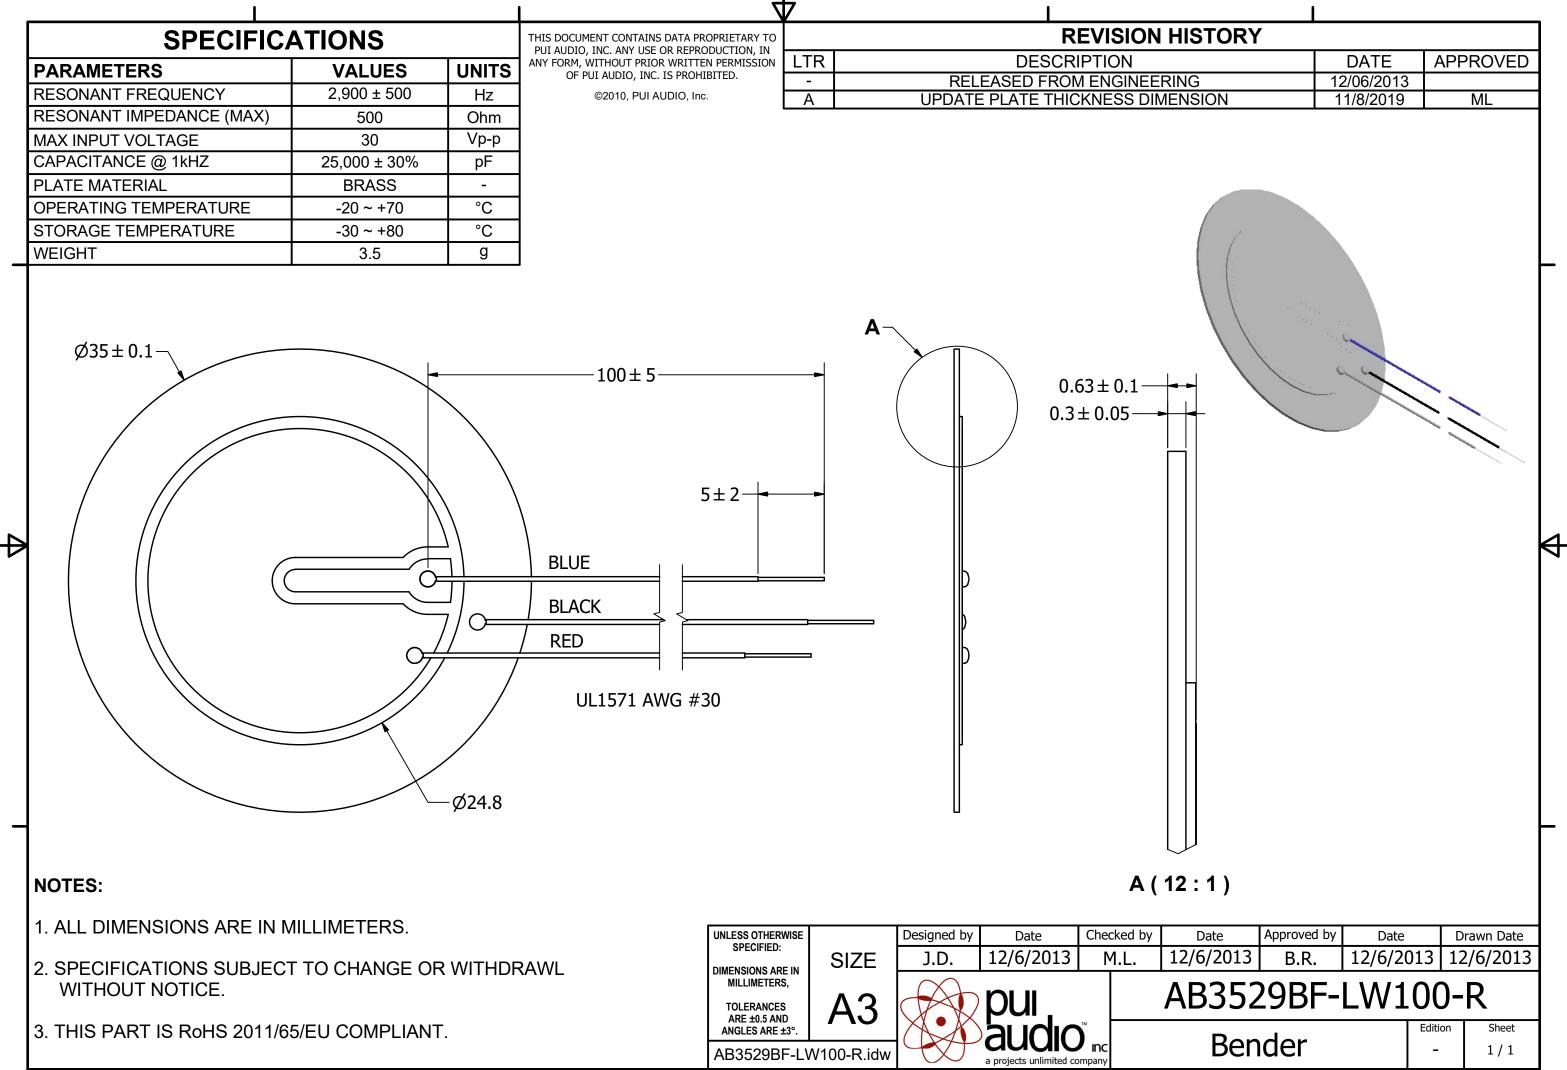

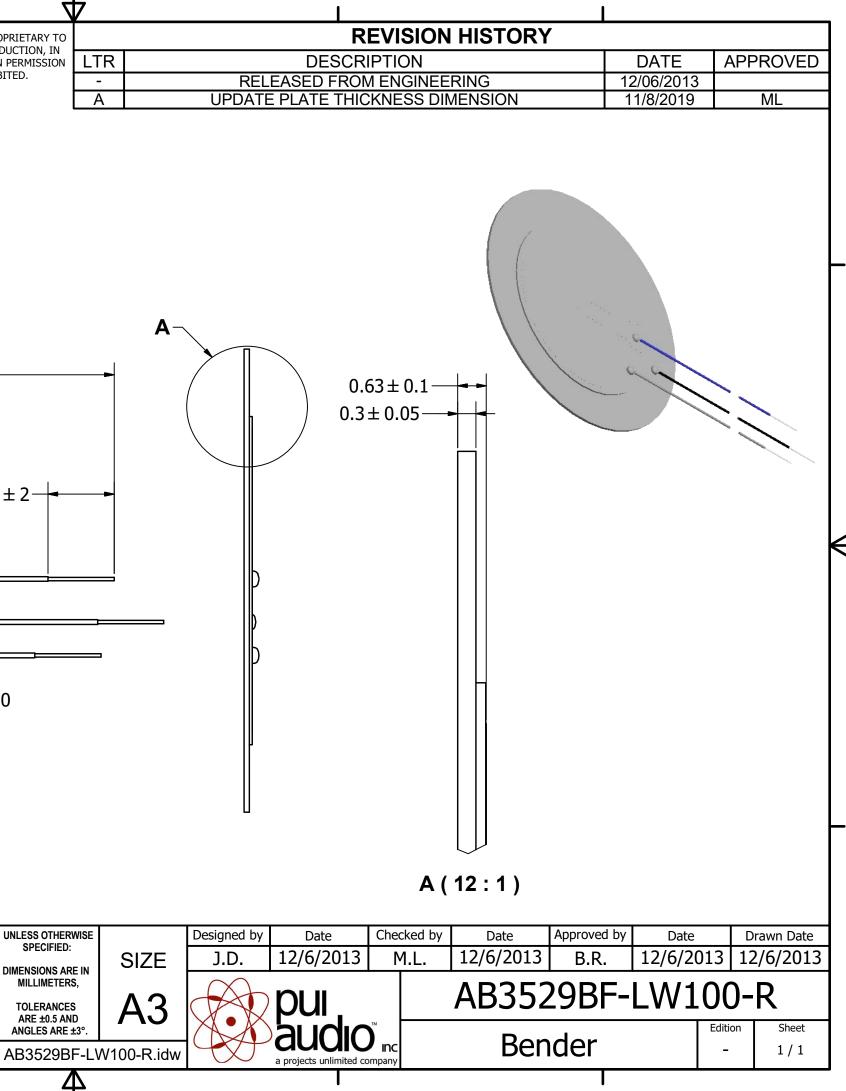

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Speakers & Transducers category:

Click to view products by PUI Audio manufacturer:

Other Similar products are found below :

 FC-30814-P127
 AS02832MR-2-R
 PB-1220PE
 PB-2015PQ
 900-00001
 AB2025B-LW50-R
 SWFK-31736-000
 PT-2065FW
 PT-4175W
 AT

 2830-TW-LW35-R
 ED-30761-000
 CI-30120-A42
 SMT-0440-T-2-R
 PB-0927PQ
 BF-7083-000
 BF-9778-000
 SMS2020-08H4.5 LF

 BDT1717-08H6.5W56MLF
 02094
 02097
 GSPK1003PN-8R0.2W-L100
 GSPK151103TN-8R0.2W
 GSPK2014035PN-8R0.5W-L100

 FS5353DS0830-H19.3
 TE082703-8
 XMLP040BD21F
 AS03608MR-LW100-R
 24520
 SMT-0540-S-2-R
 1450069
 9091653
 9091661
 IPS

 G6000-5
 9090231
 FS50MS0820-H9.7
 FS4014-4-2W
 PBM4-13.B31R.A115.0663
 PBM4-13.B33R.A115.0663
 PBM4-13.B35R.A115.0663

 A-10-6-BG360-HD1Z-GA-M4Z-ZW
 A-10-6-BG410-HD1Z-AA-AGZ-ZW
 A-10-6-BG410-HD1Z-AA-AGZ-ZW
 A-10-6-BG310-HD1Z-AA-M4Z-ZW
 A-10-6-BG310-HD1Z-AA-M4Z-ZW
 A-10-6-BG310-HD1Z-AA-AGZ-ZW

 HD1Z-GA-M4Z-ZW
 A-10-6-BG316-HD1Z-AA-AGZ-ZW
 A-10-6-BG316-HD1Z-AA-AGZ-ZW
 A-10-6-BG325-HD1Z-AA-AGZ-ZW
 A-10-6-BG325-HD1Z-AA-AGZ-ZW