SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED VOLTAGE	12	Vdc
OPERATING VOLTAGE RANGE	3 ~ 20	Vdc
RATED CURRENT (MAX)	12	mA
MINIMUM SPL @ 10 CM	110	dBA
RESONANT FREQUENCY	3.5 ± 0.5	kHz
TONE OR PULSE RATE	CONTINUOUS	0 pulse/sec
OPERATING TEMPERATURE	-40 ~ +85	С°
STORAGE TEMPERATURE	-40 ~ +90	С°
HOUSING MATERIAL	PBT	-
TERMINAL MATERIAL	Sn PLATED COPPER	-
WEIGHT	9.3	grams

 REVISION HISTORY

 LTR
 DESCRIPTION

 RELEASED FROM ENGINEERING


INC. IS PROHIBITED. ©2003, Projects Unlimited Inc.

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR

REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED,

SPL & Current Consumption vs. Input Voltage



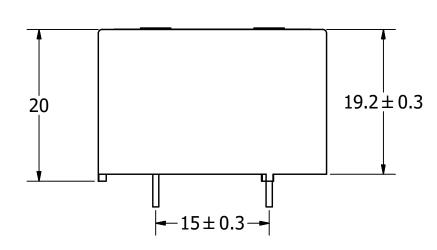


Ø6.9 Ø6.9 Ø0.8 (2)

Checked by

B.R.

NOTES:

UNLESS OTHERWISE Designed by Date 1. ALL DIMENSIONS ARE IN MILLIMETERS. SPECIFIED: 12/13/2017 SIZE M.V. DIMENSIONS ARE IN 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL MILLIMETERS, WITHOUT NOTICE. DUI **A3** TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°. 3. THIS PART IS RoHS 2011/65/EU COMPLIANT. a AI-3035-TT-12V-R.idw a projects unlimited compar 4

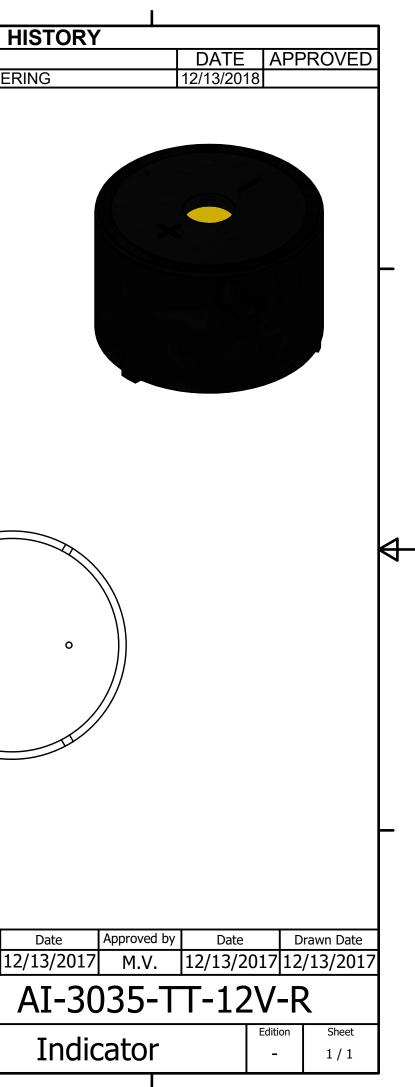

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Piezo Buzzers & Audio Indicators category:

Click to view products by PUI Audio manufacturer:

Other Similar products are found below :

6-4 68S1240-PA MBA-624 FDG06PSLLF FDG111PLF F/NRMB 24 BLACK LF PF-35N29WQ PFD-21A29W PFD-27A35PQ PL-21N30WQ PL-27A35PSQ PLD-21N30W PLD-21N30WQ PS-531Q PT-3534FP EBPT-401 B822B PB-1220PEQ S6109 SBM616PR SC110E SC2036ACP SC616N-2 SC628FW SC628MPG SC648D SCS045MD9DT3S FCM12PLF F/EB20P-DR LF F/SMD03A LF FSMD8585JSLF F/SU 21-02 LF F/TCW 12 WITH LABEL LF F/UCW 06 WITH LABEL LF PFD-27N36W PKM22EPPH40S1-B0 PKM35-4A0 PL-35N29WQ PS-552Q CM-5 REF-202 B/SE 128 RED LF KBS-20DA-7AS KBS-27DA-5C-105 LSC628ANR 03-810.001 RTO-1R07-001 PL-21N31PQ B/CP 28B BLACK LF F/DGX 05P WITH LABEL LF