SPECIFICATIONS PARAMETERS VALUES UNITS RATED VOLTAGE 110 Vdc OPERATING VOLTAGE RANGE $30 \sim 120$ Vac/Vdc RATED CURRENT (MAX) 20 mΑ MINIMUM SPL @ 10 CM 92 dBA RESONANT FREQUENCY $2,800 \pm 500$ Hz TONE OR PULSE RATE SLOW PULSE 1 pulse /sec OPERATING TEMPERATURE -30 ~ +85 °C STORAGE TEMPERATURE -40 ~ +85 °C HOUSING MATERIAL NYLON TERMINAL MATERIAL Sn Plated Bronze WEIGHT 40 grams

1. ALL DIMENSIONS ARE IN MILLIMETERS.


3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

WITHOUT NOTICE.

2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL

THIS DOCUMENT CONTAINS DATA
PROPRIETARY TO PROJECTS UNLIMITED,
INC. ANY USE OR REPRODUCTION, IN ANY
FORM, WITHOUT PRIOR WRITTEN
PERMISSION OF PROJECTS UNLIMITED, INC.
IS PROHIBITED.
©2003, Projects Unlimited Inc.

REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	6/21/2006	
Α	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	2/28/2008	B.R.

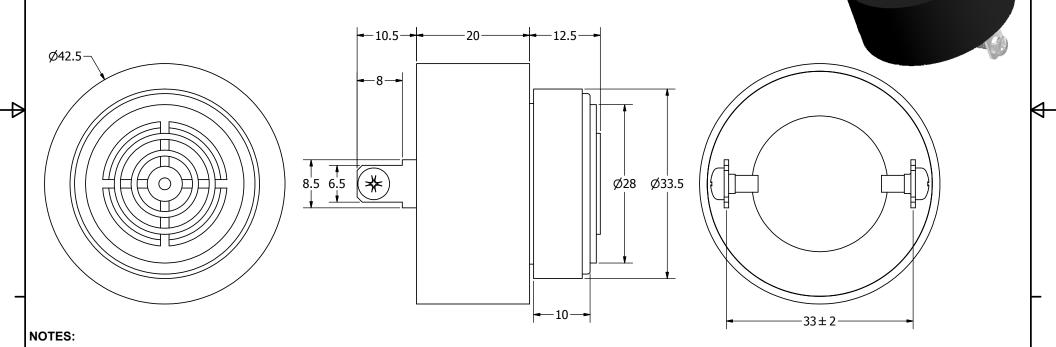

UNLESS OTHERWISE

MENSIONS ARE IN MILLIMETERS,

TOLERANCES

ARE ±0.5 AND ANGLES ARE ±3°.

AI-4228-P-SP120-R.idw

THIS PART IS

UL RECOGNIZED

IN THE US AND

CANADA

Designed by

SIZE

Date

6/21/2006

Checked by

E.P.

Date

6/21/2006

Approved by

B.R.

UL Indicator

AI-4228-P-SP120-R

Date

6/21/2006 2/28/2008

Drawn Date

1/1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Piezo Buzzers & Audio Indicators category:

Click to view products by PUI Audio manufacturer:

Other Similar products are found below:

6-4 68S1240-PA MBA-624 FDG06PSLLF FDG111PLF PF-35N29WQ PFD-21A29W PFD-27A35PQ PL-21N30WQ PL-27A35PSQ PLD-21N30W PLD-21N30WQ PS-531Q PT-3534FP EBPT-401 B822B PB-1220PEQ S6109 SBM616PR SC110E SC2036ACP SC616N-2 SC628FW SC628MPG SC648D SCS045MD9DT3S ESZ-25B-5-250B FCM12PLF SSX-52SA F/EB20P-DR LF F/SMD03A LF FSMD8585JSLF F/TCW 12 WITH LABEL LF PFD-27N36W PKM22EPPH40S1-B0 PKM35-4A0 PL-35N29WQ PLD-27A35PQ CM-5 REF-202 B/SE 128 RED LF KBS-20DA-7AS KBS-27DA-5C-105 LSC628ANR 03-810.001 RTO-1R07-001 PL-21N31PQ F-B-P1405ISB LF B/CP 28B BLACK LF F/HCW 06 WITH LABEL LF