



## **APS4812B-LW100-R 48mm Piezo Speaker**

3541 Stop Eight Road • Dayton, Ohio 45414

### **Product Overview**


- 48mm diameter speaker built using a piezo ceramic for minimum current draw
- Designed to work with TTL or CMOS signals as high as 30Vp-p
- Only 2.2 mm thick for slim devices that need high output
- Convenient 100mm leads for quick connection

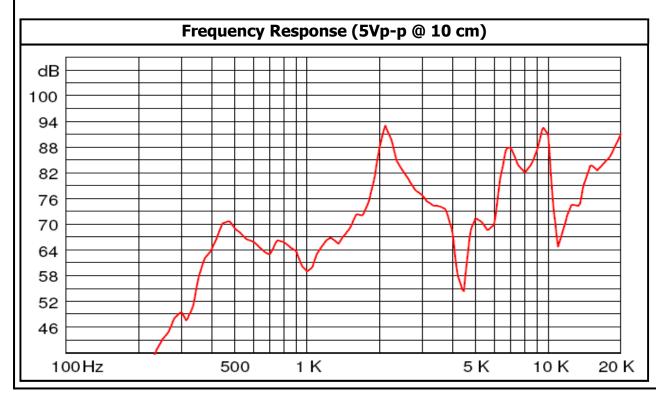

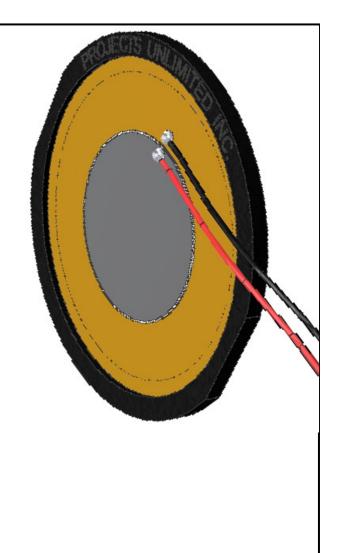







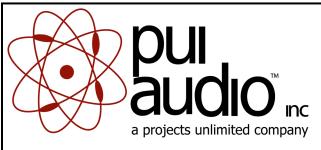

# **APS4812B-LW100-R 48mm Piezo Speaker**

Mechanical and Environment Testing				
Test Description	Test Condition			
High Temperature	70°C with random humidity for 240 hours			
Low Temperature	-20°C with random humidity for 240 hours			
Humidity	40°C with 90% to 95% relative humidity for 240 hours			
Vibration	1.5 mm movement modulated at 10 to 55 Hz for 2 hours			
Drop Test	75 cm free fall onto 40 mm thick board, 10 cycles			
Temperature Cycle Test	-20°C to 70°C, 5 cycles (refer to Temperature Cycle Test Graph)			
After 4 hours at rest, resonant frequency shall be $\pm 10\%$ of original value with capacitance $\pm 20\%$ of original value.				

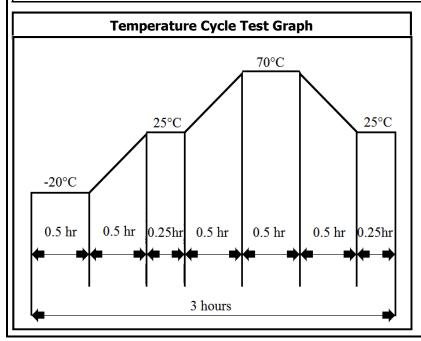



The piezo ceramic diaphragm shall be clamped at a nodal point as shown in the figure above and be free from any mechanical stress. The resonant frequency and resonant impedance is measured using sine sweep analysis. The resonant frequency is defined where the impedance shows minimum value; this shall also be the resonant impedance.


Capacitance is measured at 120 Hz using an LCR meter such as a Hewlett Packard HP49194A.


SPECIFICATIONS					
PARAMETERS	VALUES	UNIT	1		
OPERATING VOLTAGE (MAX)	30	<b>V</b> p-p	1		
CAPACITANCE @ 1kHZ	65,000 ± 30%	pF	1		
RESONANT FREQUENCY	1,200 ± 200	Hz	1		
RESONANT IMPEDANCE(MAX)@1Khz	3,500 ± 10%	Ohm	]		
OPERATING TEMPERATURE	-20 ~ +70	°C	]		
STORAGE TEMPERATURE	-20 ~ +70	°C			
PLATE MATERIAL	BRASS	-	]		
HOUSING MATERIAL	ABS	-	]		
TERMINAL MATERIAL	LEAD WIRE	-	]		
WEIGHT	3	grams	]		

THIS DOCUMENT CONTAINS DATA PROPRIETARY
TO PROJECTS UNLIMITED, INC. ANY USE OR
REPRODUCTION, IN ANY FORM, WITHOUT PRIOR
WRITTEN PERMISSION OF PROJECTS UNLIMITED,
INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

REVISION HISTORY						
LTR	DESCRIPTION	DATE	APPROVED			
-	RELEASED FROM ENGINEERING	9/12/2006				
A	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	8/20/2007	B.R.			

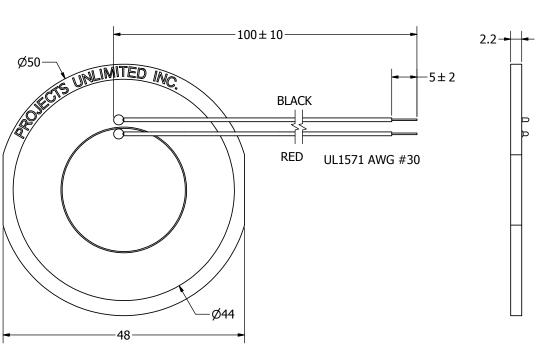

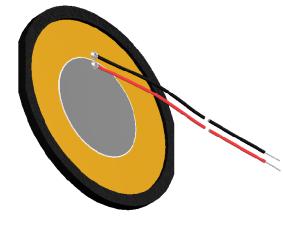

#### NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE		Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date
SPECIFIED:  DIMENSIONS ARE IN MILLIMETERS,  TOLERANCES	SIZE	J.D.	9/6/2006	B.R.	9/6/2006	R.W.	9/6/2006	8/20/2007
	۸3		ונומ		APS48	312B-	LW100	)-R

ARE ±0.5 AND ANGLES ARE ±3°.

APS4812B-LW100-R.idw

APS4812B-LW100-R.idw

APS4812B-LW100-R.idw

APS4812B-LW100-R.idw

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Speakers & Transducers category:

Click to view products by PUI Audio manufacturer:

Other Similar products are found below:

FC-30814-P127 AS02832MR-2-R PB-1220PE PB-2015PQ 900-00001 AB2025B-LW50-R SWFK-31736-000 PT-2065FW PT-4175W AT-2830-TW-LW35-R ED-30761-000 CI-30120-A42 SMT-0440-T-2-R PB-0927PQ BF-7083-000 BF-9778-000 SMS2020-08H4.5 LF BDT1717-08H6.5W56MLF 02094 02097 GSPK1003PN-8R0.2W-L100 GSPK151103TN-8R0.2W GSPK2014035PN-8R0.5W-L100 FS5353DS0830-H19.3 TE082703-8 XMLP040BD21F AS03608MR-LW100-R 24520 SMT-0540-S-2-R 1450069 9091653 9091661 IPS-G6000-5 9090231 FS50MS0820-H9.7 FS4014-4-2W PBM4-13.B31R.A115.0663 PBM4-13.B33R.A115.0663 PBM4-13.B35R.A115.0663 A-10-6-BG360-HD1Z-GA-M4Z-ZW A-10-6-BG410-HD1Z-AA-AGZ-ZW A-10-6-BG410-HD1Z-AA-M4Z-ZW A-10-6-BG410-HD1Z-FC-AGZ-ZW A-10-6-BG410-HD1Z-GA-M4Z-ZW A-10-6-BG316-HD1Z-AA-AGZ-ZW A-10-6-BG316-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW