

pui
audio™ inc
a projects unlimited company

AS01508MR-R 15mm Speaker





3541 Stop Eight Road • Dayton, Ohio 45414

Product Overview

- 15mm overall diameter speaker with Neodymium magnet for 88 dB sensitivity
- 1.2W continuous, 1.8W maximum power handling and 8Ω impedance
- Mylar cone, integrated grill screen, and pre-applied double-sided tape for quick mounting

Frequency Response (0.1W @ 0.1 meter)


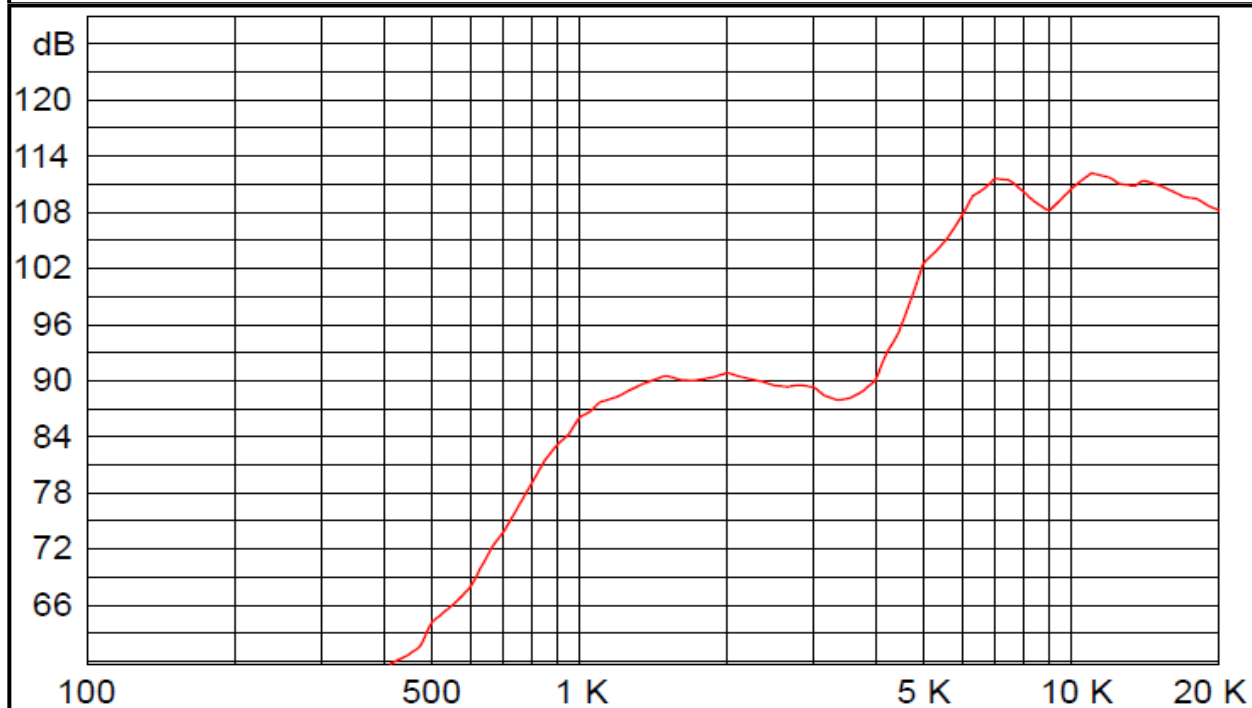


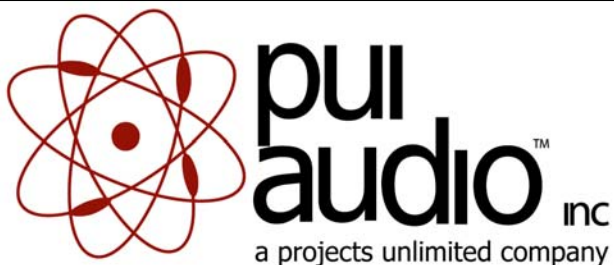

AS01508MR-R 15mm Speaker

Mechanical and Environment Testing	
Test Description	Test Condition
High Temperature	85°C with random humidity for 96 hours
Low Temperature	-40°C with random humidity for 96 hours
Humidity	40°C ±2°C with 90% to 95% relative humidity for 96 hours
Vibration	1.5 mm movement modulated at 10 to 55 Hz for 2 hours
Drop Test	75 cm free fall onto 5 mm thick board, 10 cycles
Temperature Cycle Test	-20°C to 55°C, 5 cycles (refer to Temperature Cycle Test Graph)

After tests, speaker shall rest for 1 hours. SPL shall not deviate ±3 dB from pre-test measurement.

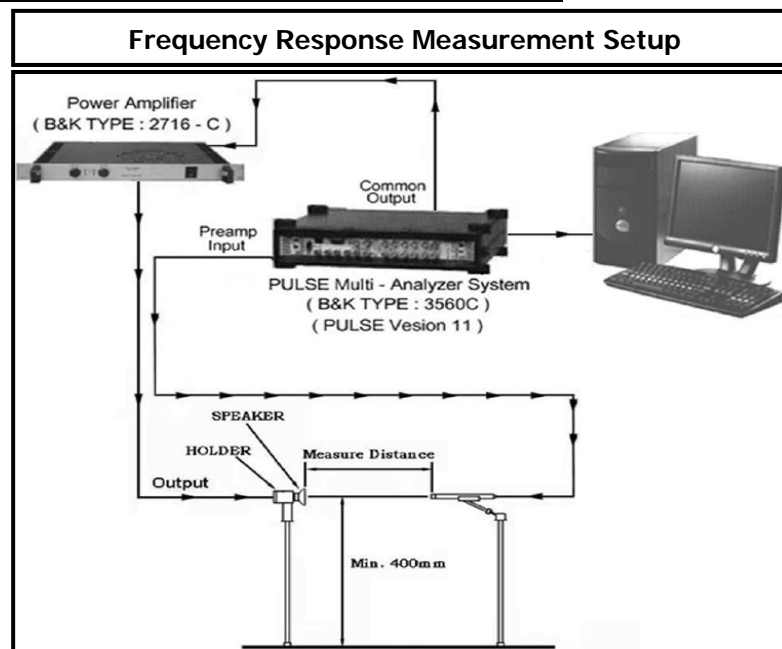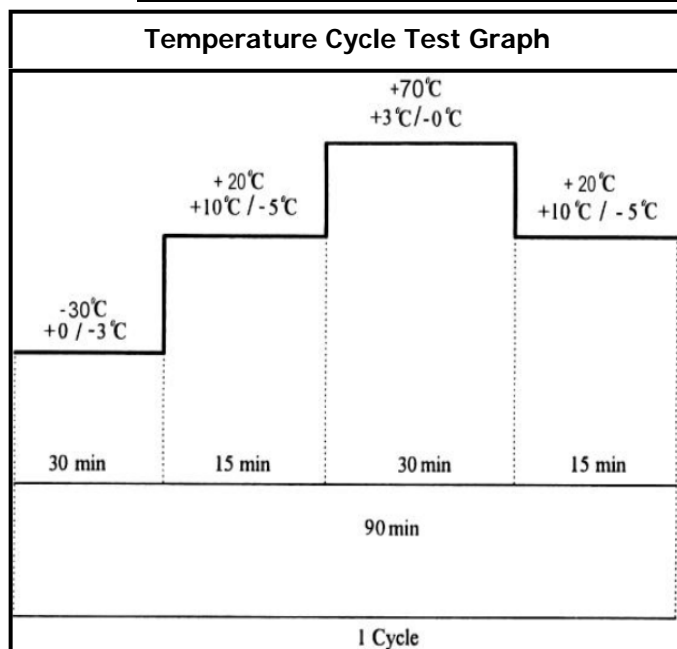




SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT POWER	1.2	W
MAX INPUT POWER	1.8	W
IMPEDANCE	8 ± 15%	OHM
OUTPUT SPL @ 0.1W/0.1M (AT 0.8, 1.0, 1.2, 1.5, 2.0 kHz)	88 ± 3	dBA
DISTORTION (MAX.)	10%	-
RESONANT FREQUENCY	900 ± 20%	Hz
FREQUENCY RANGE	900 ~ 12,000	Hz
HOUSING MATERIAL	ABS	-
CONE MATERIAL	MYLAR	-
MAGNET MATERIAL	Nd-Fe-B	-
OPERATING TEMPERATURE	-30 ~ +70	°C
WEIGHT	1.5	grams

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.
©2003, Projects Unlimited Inc.


REVISION HISTORY

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	12/31/2007	
A	REVISED HEIGHT DIMENSIONS	2/05/2009	B.R.
B	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	2/06/2009	B.R.

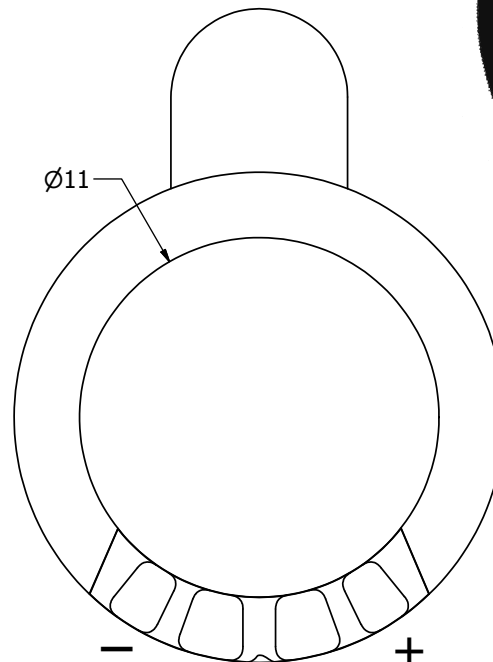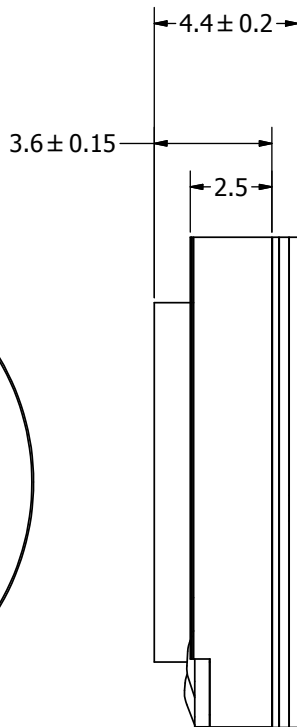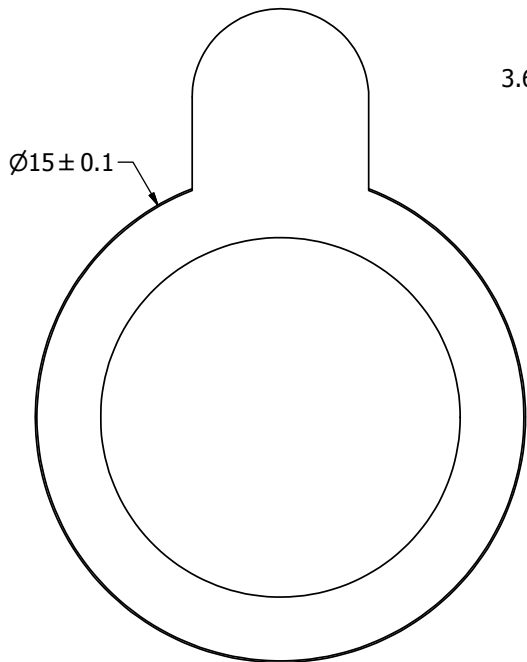

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date
	A3	J.D.	9/5/2006	B.R.	9/5/2006	R.W.	9/5/2006	2/6/2009
AS01508MR-R.idw	 pui audio a projects unlimited company		AS01508MR-R Speaker			Edition	Sheet	
						-	1 / 1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Speakers & Transducers](#) category:

Click to view products by [PUI Audio](#) manufacturer:

Other Similar products are found below :

[AS02016MR-2-R](#) [PB-1220PE](#) [PB-2015PQ](#) [900-00001](#) [SMT-2240-TW-2-R](#) [SWFK-31736-000](#) [PT-2065FW](#) [PT-4175W](#) [AT-2830-TW-LW35-R](#) [ED-30761-000](#) [ED-31305-163](#) [SMT-0830-T-R](#) [CI-30120-A42](#) [TWFK-23991-000](#) [PB-0927PQ](#) [BF-7083-000](#) [AB6505B](#) [BF-9778-000](#) [AS01708MR-SC-2-R](#) [AT-5030-TF-2-LW100-R](#) [SMS2020-08H4.5 LF](#) [BDT1717-08H6.5W56MLF](#) [BLS50-1-08H18.2B-03 LF](#) [57336039](#) [FS45MS0810-H5.0](#) [FS57DS16025-H11.4](#) [FS7030-8T-H17.5](#) [FS32MS0410-H5.1](#) [FS5030DS0420-H11.8](#) [02094](#) [02097](#) [SMT-0927-S-13-R](#) [FS57DS0430-H11.5](#) [FS7030DS0430-H17.5](#) [GMC1205YAS-8R2048](#) [GMC1205YAS-16R2048](#) [GMC1205YAS-42R2048](#) [GMC1205YAS-120R2048](#) [GSPK3013P-8R0.15W](#) [GSPK4020057TN-8R1W](#) [GSPK4020057TN-8R2W](#) [GSPK4020057TN-4R2W](#) [GSPK4935PN-8R2W-L270](#) [GSPK1609035TN-7R0.8W-L100](#) [GSPK1003PN-8R0.2W-L100](#) [GSPK1335PN-8R0.7W-L100](#) [GSPK1504PN-8R0.7W-L100](#) [GSPK151103TN-8R0.2W](#) [GSPK2004PN-8R0.5W-L100](#)