



Data Sheet AS03208MS-3-R

PUI Audio's **AS03208MS-3-R** packs a punch despite its 32 x 32 x 16.5mm size. A 3W nominal, 4W max power handling and great sensitivity combine to make for a small speaker that can output as much as 85 dB of sound at one meter!

The flat 200 Hz to 20,000 Hz frequency response covers over 90% of the audio band, and high–end design—rubber surround and non-resonant frame—makes for a speaker that truly delivers high fidelity performance. Great for critical listening applications!

Features:

- IP65 rated speaker face
- High 83 dB output at 1W/50cm
- Neodymium motor
- Only 16.5 mm thick
- 1.5mm of excursion


Specifications

Parameters	Values	Units
Rated Input Power	3	Watts
Max Input Power	4	Watts
Impedance	8 ± 15%	Ohms
Sensitivity (SPL @ 1W/50cm)		
(600, 800, 1000, and 1200 Hz)	83 ± 3	dBA
Distortion (Max @ 1W, 1 kHz)	<5%	-
Resonant Frequency	200 ± 20%	Hz
Frequency Range	200 ~ 20,000	Hz
Housing Material	ABS	-
Magnet Material	NdFeB	-
Weight	16.6	Grams
Environmental Protection Rating	IP65	-


Specifications (continued)

Buzz, Rattle, etc.	Should not be audible with 3.46V sine wave from 300 Hz to 10 kHz	_
Polarity	When positive voltage is applied to the positive terminal, the diaphragm will move outward	-
Operating Temperature	-40 ∼ +85	°C
Storage Temperature	-40 ~ +85	°C

Measurement Method

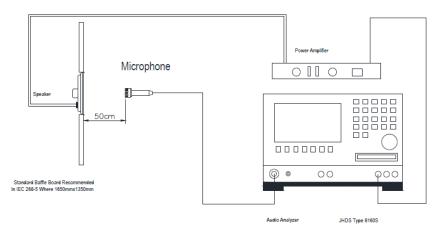

Frequency Response (measured at 50cm with 1W input power)

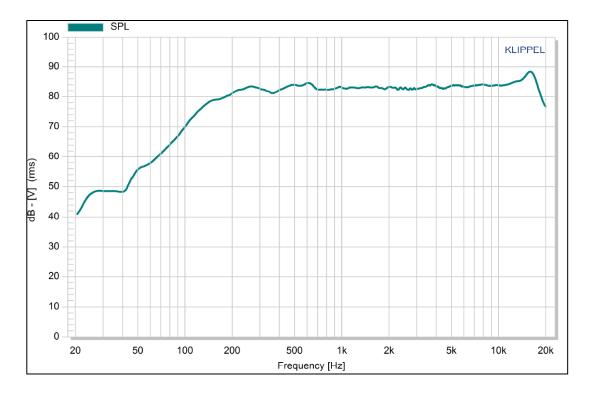


©2017, PUI Audio Inc.

Reliability Testing

Type of Test	Test Specifications	
High Temperature Test	96 hours at +85°C ± 3°C followed by six hours in normal room temperature	
Low Temperature Test	96 hours at -40°C ± 3°C followed by six hours in normal room temperature	
Humidity Test	96 hours at +40°C ± 3°C with relative humidity at 90% to 95% followed by 3 hours in normal room temperature	
Temperature Cycle Testing	The part shall be subjected to 4 cycles using the following procedure: +85°C Hour Total 4 Cycles To Start To Start	
Vibration Test	30 ± 15 Hz vibration with 1.5mm amplitude for 3 hours	
Drop Test	Drop the speakers onto a 40mm thick board 10 times from a height of 75cm.	
Load Test	Pink noise is applied at the speakers rated power for 96 hours at room temperature	

After each test, the speaker's SPL shall be ±3 dB of the original SPL

Dimensions

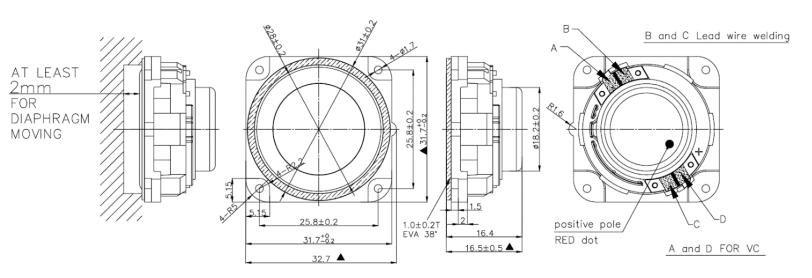

▲ Critical dimension

This document contains data proprietary to PUI Audio Inc. Any use or reproduction, in any form, without prior written permission of PUI Audio Inc. is prohibited.

©2017, PUI Audio Inc.

Specifications Revisions

Revision	Description	Date
-	Released from Engineering	5/2/2016
A	Revised IP Rating to IP65	12/8/2016
В	Revised Operating Temperature	1/11/2018
С	Revised Solder Pad Information	2/6/2019

Note:

- 1. Unless otherwise specified:
 - A. All dimensions are in millimeters.
 - B. Default tolerances are ± 0.5 mm and angles are $\pm 3^{\circ}$.
- 2. Specifications subject to change or withdrawal without notice.
- 3. This part is RoHS 2011/65/EU Compliant.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Speakers & Transducers category:

Click to view products by PUI Audio manufacturer:

Other Similar products are found below:

FC-30814-P127 AS02832MR-2-R PB-1220PE PB-2015PQ 900-00001 AB2025B-LW50-R SWFK-31736-000 PT-2065FW PT-4175W AT-2830-TW-LW35-R ED-30761-000 CI-30120-A42 SMT-0440-T-2-R PB-0927PQ BF-7083-000 BF-9778-000 SMS2020-08H4.5 LF BDT1717-08H6.5W56MLF 02094 02097 GSPK1003PN-8R0.2W-L100 GSPK151103TN-8R0.2W GSPK2014035PN-8R0.5W-L100 FS5353DS0830-H19.3 TE082703-8 XMLP040BD21F AS03608MR-LW100-R 24520 SMT-0540-S-2-R 1450069 9091653 9091661 IPS-G6000-5 9090231 FS50MS0820-H9.7 FS4014-4-2W PBM4-13.B31R.A115.0663 PBM4-13.B33R.A115.0663 PBM4-13.B35R.A115.0663 A-10-6-BG360-HD1Z-GA-M4Z-ZW A-10-6-BG410-HD1Z-AA-AGZ-ZW A-10-6-BG410-HD1Z-AA-M4Z-ZW A-10-6-BG410-HD1Z-AA-M4Z-ZW A-10-6-BG310-HD1Z-AA-M4Z-ZW A-10-6-BG310-HD1Z-AA-M4Z-ZW A-10-6-BG310-HD1Z-AA-AGZ-ZW A-10-6-BG315-HD1Z-AA-AGZ-ZW A-10-6-BG315-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG316-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG316-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG316-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG316-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG316-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW A-10-6-BG316-HD1Z-AA-AGZ-ZW A-10-6-BG325-HD1Z-AA-AGZ-ZW