
SPECIFICATIONS

PARAMETERS	VALUES	UNIT
DIRECTIVITY	OMINI	-
SENSITIVTY	-38 ± 3	dB
STANDARD OPERATING VOLTAGE	2	Vdc
MAX OPERATING VOLTAGE	10	Vdc
CURRENT CONSUMPTION (MAX)	0.5	mA
IMPEDANCE	2.2	KOhm
SIGNAL TO NOISE RATIO (MIN.)	60	dB
TERMINAL	PIN	-
INTERNAL CAPACITOR	N/A	pF

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED. ©2003, Projects Unlimited Inc.

7	7	1		1	
OPRIETARY TO ' USE OR		REVI	SION HISTORY		
HOUT PRIOR	LTR	DESCRIPTI		DATE	APPROVED
SUNLIMITED,	_	RELEASED FROM EN		1/24/2006	
nc.	А	ADDED TERMINAL F	POLARITY	2/5/2010	D.F.
		REVISED TO INVENTOR 3-D D		10/26/2010	B.R.
	С	REVISED DIAMETER T	OLERANCE	10/8/2015	B.R.
-2.2±0.2		RM 1 (+)	о — текм 2 (-)		
UNLESS OTHER SPECIFIED: DIMENSIONS ARI MILLIMETERS TOLERANCES ARE ±0.5 ANI ANGLES ARE ±	SIZE		ROM-22	r. 1/24/200 238P-NI	Drawn Date D6 10/26/2010 R Edition Sheet
	38P-NF-R.idw	a projects unlimited company	Micropho	ne	- 1/1
4	4	I		1	

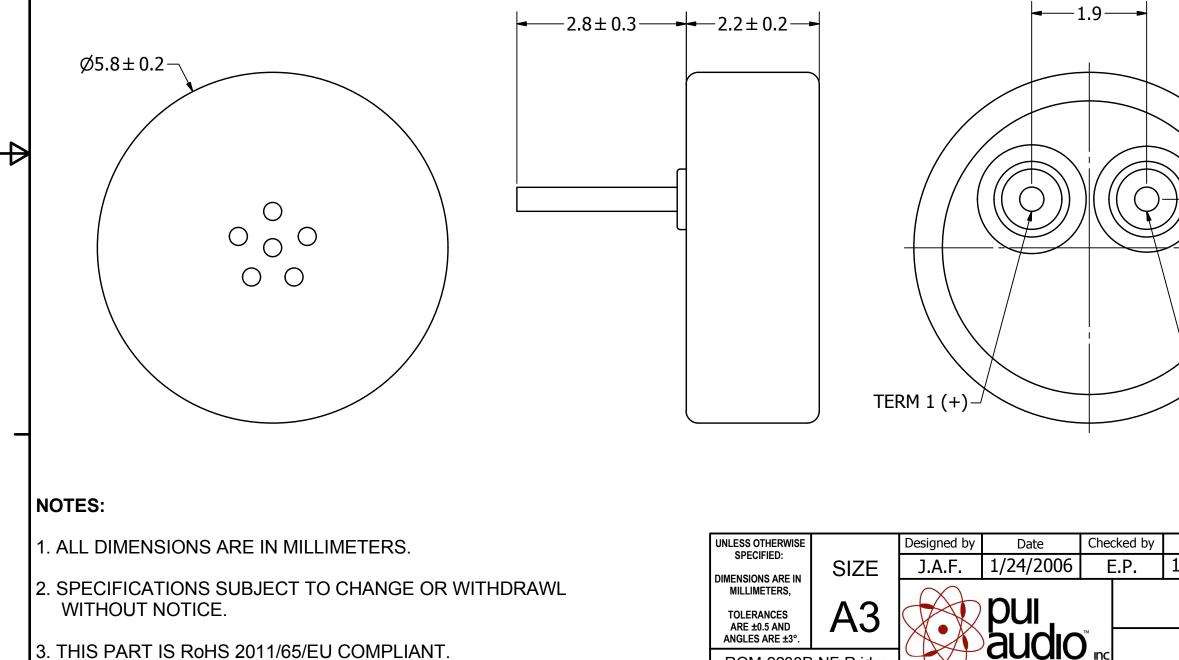

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Microphones category:

Click to view products by PUI Audio manufacturer:

Other Similar products are found below :

BCM40130LFC-42-JST-ZHR-2 TO38-30702-B20 SPM04C-38/1186-T/R BCM4013OSBC-42 LF TOW-1242P-R BCM9745-44 BCM9765 BCM9767P LD-MC-0905P LD-MC-6035 LD-MC-9765 PMOF-9745S-42UQ ROM-2235L-HD-R CMC-4015-130T CMC-6050-40T CMC-6035-130T CMC-6015-47P BCM9745P-44 BCM9767-42 254-ECM644-RO LD-MC-4011 LD-MC-6027 LD-MC-6035P LD-MC-6035W LD-MC-9765P LD-MC-9765W FG-23629-D65 PNR-23539-000 254-FP270-RO BCM9765P-44 CMC-5042PF-AC CMC-6010-42L100 CMC-9745-L100 CMC-3015-44T CMC-4015-25T CMC-6013-38T CMC-6022-37L100 CMC-6027-24T CMC-6027-32T CMC-6027-42T GMI4522P-2C-30db GMI4522P-2C-50db GMI4522P-2C-52db GMI6027P-2C66DB GMA3526H10-B26 GMA4030H11-F26 GMI4015-32DB GMI4015-40DB GMI4015P-36DB GMI4015P-46DB