
THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, MITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

© 2005, Projects Unlimited Inc.

SPECIFICATIONS

	REVISIONS		
LTR	DESCRIPTION	DATE	APPROVED
_	RELEASED FROM ENGINEERING	3/23/20	

PARAMETERS	VALUES	UNITS
DIRECTIVITY	OMNI	1
SENSITIVITY	-37±3	dB
STANDARD OPERATING VOLTAGE	2	Vdc
MAX OPERATING VOLTAGE	10	Vdc
CURRENT CONSUMPTION (MAX)	0.5	mΑ
IMPEDANCE	2.2	k0hm
SIGNAL TO NOISE RATIO (MIN.)	68	dB
TERMINAL	LEAD WIRE	-
INTERNAL CAPACITOR	33&10	pF
OPERATING TEMPERATURE	-20 to 60	ů

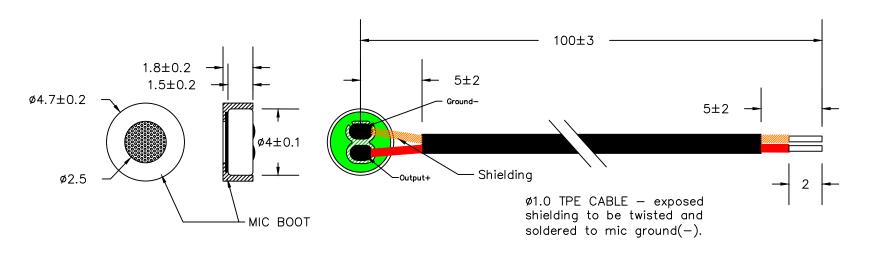

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2011/65/EU COMPLIANT.

UNLESS OTHERWISE SPECIFIED: ALL PURCHASES ARE SUBJECT TO THE PUI UDIO TERMS AND CONDITIONS SALE FOUND A http://www.puiaudio.com/pdf/terms_conditions.pdf (paper copy available upon request). DIMENSIONS ARE IN MILLIMETERS, TOLERANCE ARE ±0.5 AND ANGLES ARE ±3°. a projects unlimited compar

3541 Stop Eight Road Dayton, Ohio 45414

APPROVALS DATE DRAWN M.L. 3/20 M.L

SIZE DRAWING NO. TOM-1537L-HD-LW100-B-R Α

SCALE: N.T.S.

SHEET

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Microphones category:

Click to view products by PUI Audio manufacturer:

Other Similar products are found below:

BCM4013OLFC-42-JST-ZHR-2 TO38-30702-B20 SPM04C-38/1186-T/R BCM4013OSBC-42 LF TOW-1242P-R BCM9745-44 BCM9765
BCM9767P LD-MC-0905P LD-MC-6035 PMOF-9745S-42UQ ROM-2235L-HD-R CMC-4015-130T CMC-6050-40T CMC-6035-130T
CMC-6015-47P BCM9745P-44 BCM9767-42 254-ECM644-RO LD-MC-4011 LD-MC-6027 LD-MC-6035W LD-MC-9765P LD-MC9765W FG-23629-D65 PNR-23539-000 254-FP270-RO BCM9765P-44 CMC-5042PF-AC CMC-6010-42L100 CMC-9745-L100 CMC3015-44T CMC-4015-25T CMC-6013-38T CMC-6022-37L100 CMC-6027-24T CMC-6027-32T CMC-6027-42T GMI4522P-2C-30db
GMI4522P-2C-50db GMI4522P-2C-52db GMI6027P-2C66DB GMA3526H10-B26 GMA4030H11-F26 GMI4015-32DB GMI4015-40DB
GMI4015P-36DB GMI4015P-46DB GMI4015P-54DB GMI4015P-58DB