


CX2156NL

BALUN TRANSFORMER, 1:1
2.3 – 2700 MHz
IMPEDANCE = 75 OHMS
SURFACE MOUNT

NOTES: UNLESS OTHERWISE SPECIFIED:

1. OPERATING TEMPERATURE: -40°C TO $+85^{\circ}\text{C}$
2. STORAGE TEMPERATURE: -20°C TO $+125^{\circ}\text{C}$
3. JEDEC MOISTURE SENSITIVITY LEVEL 1
4. DIMENSIONS ARE IN MM [INCHES] WITH THE FOLLOWING TOLERANCE:
.X = ± 0.1 [± 0.004]
.XX = ± 0.05 [± 0.002]
5. OPTIONAL TAPE & REEL PACKAGING CAN BE ORDERED BY ADDING A "T" SUFFIX TO THE PART NUMBER. ie: CX2156NLT
6. ROHS COMPLIANT




ELECTRICAL SPECIFICATIONS @ 25°C:

INSERTION LOSS:

FREQUENCY	CALCULATED ATTENUATION
2.3 MHz	-0.4 dB MAXIMUM
500 MHz	-0.6 dB MAXIMUM
1000 MHz	-1.0 dB MAXIMUM
2000 MHz	-1.5 dB MAXIMUM
2700 MHz	-2.2 dB MAXIMUM

MECHANICAL SPECIFICATIONS:

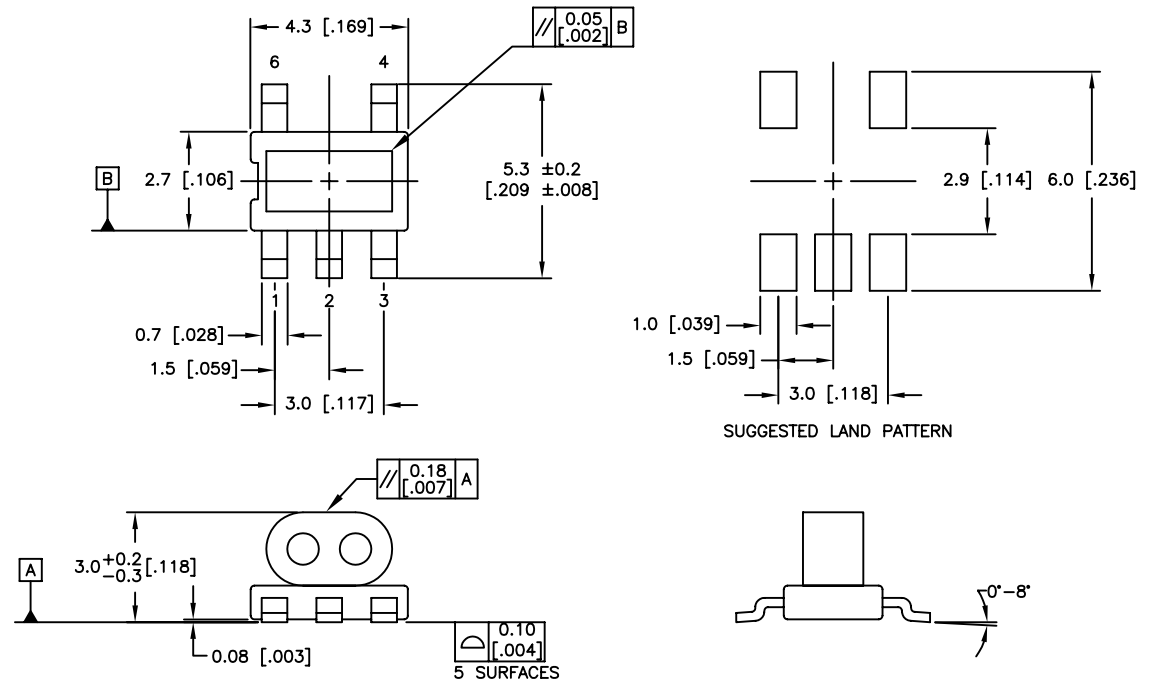

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers / Signal Transformers](#) category:

Click to view products by [Pulse manufacturer](#):

Other Similar products are found below :

[CX2041NLT](#) [MGPWT-00449-P](#) [PE-64961](#) [H1302FNLT](#) [H5008FNL](#) [H5012FNL](#) [H5020FNLT](#) [H5077NLT](#) [H5084FNLT](#)
[B78476A9558A003](#) [1812WBT2-4](#) [1879479-1](#) [HX2260FNL](#) [HX5014FNL](#) [EX2024FNL](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [PE-65848FNLT](#) [H1174FNL](#) [H1302FNL](#) [H5015FNL](#) [H5019EFNL](#) [H5062FNLT](#) [CX2047LNL](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#) [MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [BX1194WNLT](#) [HX1234NLT](#) [HX5008FNLT](#) [HX5019FNL](#) [HX5084NL](#) [3-1879385-5](#) [TX1263NLT](#) [4-1879391-0](#) [T1142NL](#) [HX6101FNL](#) [HX5084FNL](#) [HX1148NL](#) [HX5020FNLT](#) [HX5014FNLT](#) [T1124NL](#)
[1879732-1](#) [2-1879391-5](#)