






NOTES:

- 1. ROHS COMPLIANT
- 2. HEADER: THERMOSET PLASTIC MATERIAL WITH FLAMMABILITY RATING UL 94V-0 OR BETTER.
- 3. STORAGE TEMPERATURE: -40°C TO +125°C
- 4. COMPLIANCE TO J-STD:
 - A. J-STD-002: SOLDERABILITY AT 245°C REFLOW PROFILE
 - B. J-STD-020: LEVEL 1, NO MOISTURE SENSITIVE
 - C. J-STD-075: R7, 245°C MAXIMUM THROUGH REFLOW SOLDER
- 5. TO ORDER TAPE & REEL PACKAGING ADD A "T" SUFFIX TO THE PART NUMBER(i.e H5015NL BECOMES H5015NLT).







FINAL OUTLINE

© Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (07/31/15)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,1GD,1:1,SM,TU	H5015NL-16	PS-2054.001-B	1 OF 3	H5015NL	A


E-MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US), ASIA@PUI SFFI FCTRONICS.COM(Asia)

PHONE: USA:858 674 8100, GERMANY:49 7032 78060, SINGAPORE:65 6287 8998, SHANGHAI:86 21 62787060, TAIWAN:886 3 4356768







CHANNEL 1

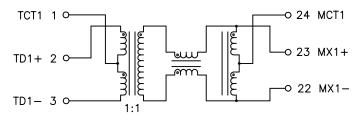


CHANNEL 2

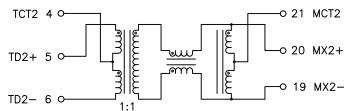

CHANNEL 3

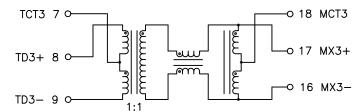



ALL CHANNELS ARE IN PHASE BETWEEN INPUT AND OUTPUT


ELECTRICAL CHARACTERISTICS AT +25°C UNLESS OTHER SPECIFIED

MEETS IEEE 802.3 SPECIFICATION

r					
PARAMETER	SPECIFICATIONS				
OPERATING TEMP	0°C – 70 °C				
TURNS RATIO	1.00 ± 2%				
POLARITY	PER SCHEMATIC				
OCL, TRANSMIT CHANNEL	350 uH MIN. W	350 uH MIN. WITH 8 mA DC BIAS, -0 TO 70 °C			
INSERTION LOSS	100 KHz	1-100 MHz	125 MHz		
INSERTION LOSS	-1.2 dB MAX	-1.0 dB MAX	-3.0 dB MAX		
RETURN LOSS	1-40 MHz 40-100 MHz				
$(Z OUT = 100 OHM \pm 15\%)$	-16 dB MIN	-10+20*LOG ₁₀ (f/80) dB MIN			
CROSSTALK (TX-RX)	1 MHz	30-100 MHz			
CRUSSIALK (IX-RA)	-50 dB MIN	-55+24*LOG ₁₀ (f/10) dB MIN			
DIFFERENTIAL TO COMMON	2 MHz	30-100 MHz			
MODE REJECTION	-50 dB MIN	-43+22*LOG10(f/30) dB MIN			
INPUT – OUTPUT ISOLATION	1500 VRMS MIN				

NOTE: f IS FREQUENCY IN MHz.

CHANNEL 4

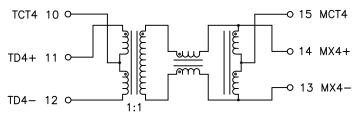

SCHEMATIE

© Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (07/31/15)


PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,1GD,1:1,SM,TU	H5015NL-16	PS-2054.001-B	2 OF 3	H5015NL	A


E-MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US). ASIA@PUI SFFI FCTRONICS.COM(Asia)

PHONE: USA:858 674 8100, GERMANY:49 7032 78060, SINGAPORE:65 6287 8998, SHANGHAI:86 21 62787060, TAIWAN:886 3 4356768







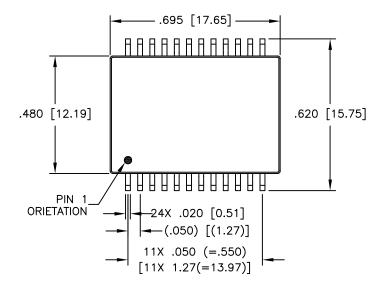

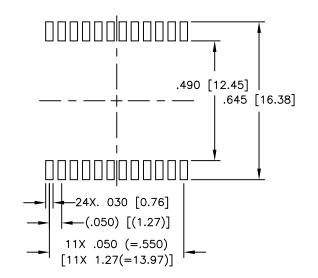

SUGGESTED LAND PATTERN

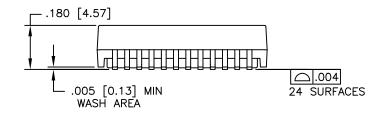



DIMENSIONS ARE IN INCHES [MILLIMETERS] WITH THE FOLLOWING TOLERANCES: [MILLIMETERS] ARE FOR REFERENCE ONLY.

 $.XX = \pm .02 [\pm 0.5]$

.XXX= ±.010 ±0.25]

© Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (07/31/15)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,1GD,1:1,SM,TU	H5015NL-16	PS-2054.001-B	3 OF 3	H5015NL	A

E-MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US), ASIA@PULSEFI FCTRONICS.COM(Asia)

PHONE: USA:858 674 8100, GERMANY:49 7032 78060, SINGAPORE:65 6287 8998, SHANGHAI:86 21 62787060, TAIWAN:886 3 4356768

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Audio Transformers / Signal Transformers category:

Click to view products by Pulse manufacturer:

Other Similar products are found below :

CX2041NLT MGPWT-00449-P PE-64961 H1302FNLT H5008FNL H5012FNL H5020FNLT H5077NLT H5084FNLT B78476A9558A003 1812WBT2-4 1879479-1 HX2260FNL HX5014FNL EX2024FNL FL1066 T1137NLT T3012NL PE-65812FNL PE-65848FNLT H1174FNL H1302FNL H5015FNL H5019EFNL H5062FNLT CX2047LNL MGPWT-00059-P MGPWT-00266-P MGPWT-00278-P MGPWT-00431-P TTC-100 TTC-143-H TTC-5032-1 BX1194WNLT HX1234NLT HX5008FNLT HX5019FNL HX5084NL 3-1879385-5 TX1263NLT 4-1879391-0 T1142NL HX6101FNL HX5084FNL HX1148NL HX5020FNLT HX5014FNLT T1124NL 1879732-1 2-1879391-5